

# myHIQ Home

**myHIQ** is a custom application built for specific projects based on CybroMiniScada. It can be fully customized for end-user needs.



4


The screenshot shows a floor plan on the left and a scene selection bar on the right. The scene selection bar has two items: 'Scene 0' and 'Scene 1'. Below the floor plan, there is a small number '4'.

5

The screenshot shows a floor plan on the left and a list of controlled devices on the right. The devices listed are: Entrance light, Kitchen light, Table light, Kitchen blinds 1, Kitchen blinds 2, and Table blinds. Below the floor plan, there is a small number '5'.

Example for front door light

The screenshot shows a grid of lights on the left and a timeline at the bottom. The timeline has a scale from 00 to 20. Below the timeline, there is a small number '5'.

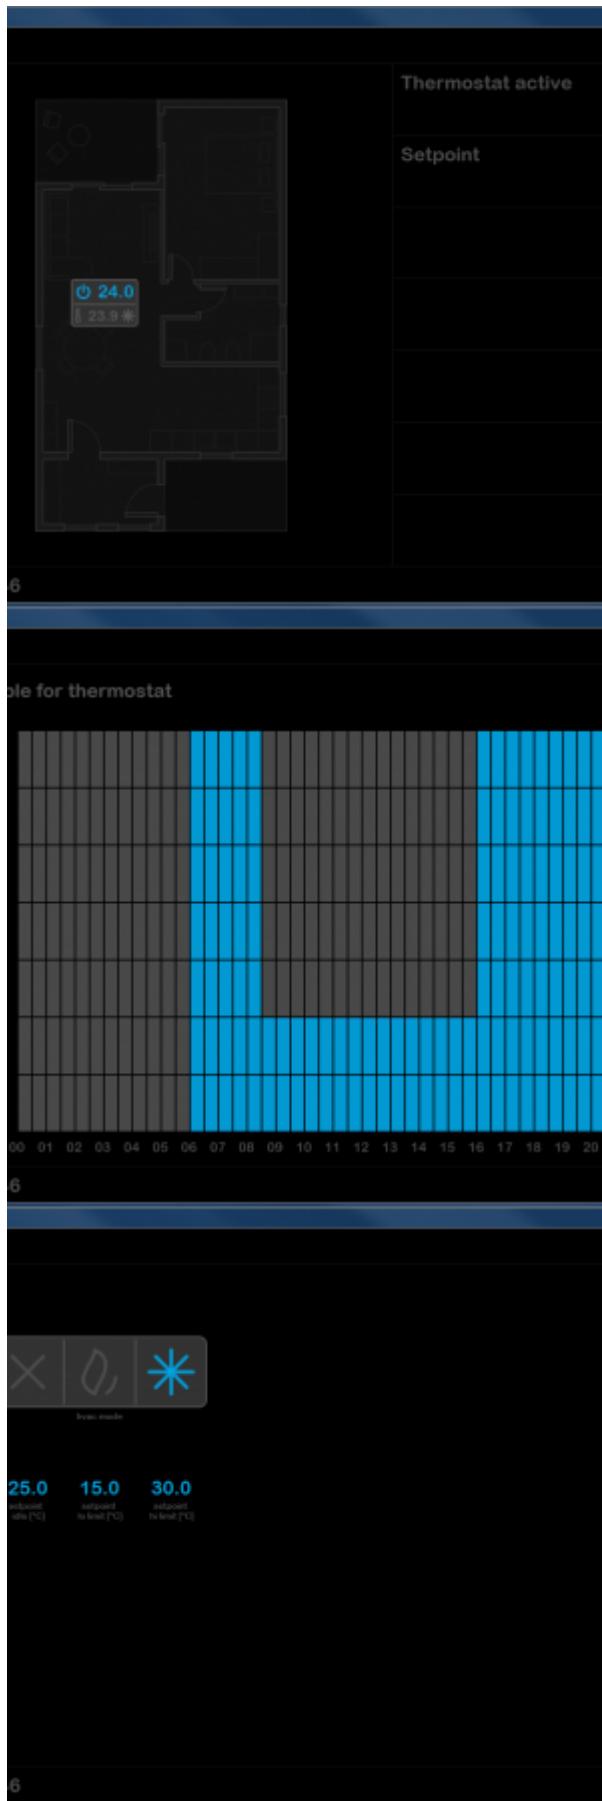




[myHIQ demo app](#)

## CyBroMiniScada variables

c1000.1c00\_qx00

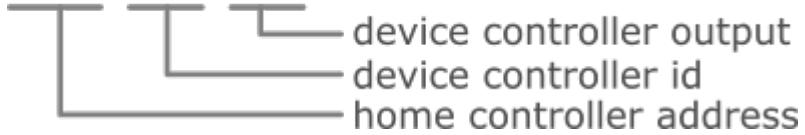

**home controller address** | c+home controller address | find on silver sticker on top of HC-HIQ

## On/Off devices

All On/Off devices (lights, managed power sockets, exhaust fans, ...) are controlled by LC-10-IQ device controller. myHIQ application displays device status and allows to toggle device output.

### Device controller variables

HIQ-DC	id	output	description
LC-10-IQ	lc00..lc04	qx00..qx09	r/w; 0=off, 1=on

## Dimmers

Dimmable devices (lights and some ceiling fans) are controlled by several device controllers, depending on controlled devices:

- LD-V4-IQ for LED stripes
- LD-P4-IQ for 230 V dimmable lights and ceiling fans
- LD-D8-IQ for DALI lights

myHIQ application displays the device's on / off status and output intensity, and allows to control both.

### Device controller variables

HIQ-DC	id	output	description
LD-V4-IQ		qx00..qx03	r/w, 0=off, 1=on
LD-P4-IQ	ld00..ld04	qx00..qx03	r/w, 0=off, 1=on
LD-D8-IQ		qw00..qw03	r/w; 0..100 %

## Blinds

Blinds are controlled by a BC-5-IQ device controller. myHIQ application displays and sets the blind position.

### Device controller variables

HIQ-DC	id	output	description
BC-5-IQ	bc00..bc01	qxs00up..qxs04up	r/o; 0=off, 1=moving up
		qxs00dn..qxs04dn	r/o; 0=off, 1=moving down
		blinds_position_00..04	r/o; 0..100 %
		blinds_setpoint_00..04	r/w; 0..100 %, -1=stop

## Scenes

Scenes are implemented directly in HIQ-HC. There is no need to use scene controller for using scenes from myHIQ application.

### Home controller variables

<b>HIQ-HC variable</b>	<b>id</b>	<b>description</b>
scene_status[0]	index=0..31	r/o; 0=scene inactive, 1=scene active, 255=scene not defined
global_scene_request	/	w/o; 0..31=set scene 0..31, -1=idle
global_memory_request	/	w/o; 0..31=memorize scene 0..31, -1=idle

## Thermostats

Temperature regulation is done using TH-1M-IQ, TH-1T-IQ or TH-2-IQ thermostat and FC-1-IQ for fan-coils or HC-IQ for radiators.

### Device controller variables

<b>HIQ-HC</b>		<b>description</b>	
<b>HC-IQ</b>	<b>hvac_mode</b>	r/w; 0=off, 1=heating, 2=cooling	
<b>HIQ-DC</b>	<b>id</b>	<b>output</b>	<b>description</b>
<b>TH-1M-HIQ</b> <b>TH-1T-IQ</b> <b>TH-2-IQ</b>	th00..th04	setpoint	r/w; *0.1 °C (234=23.4 °C)
		temperature	r/o; *0.1 °C (234=23.4 °C)
		humidity	r/o; % RH
		active	r/w; 0=inactive (uses idle setpoint), 1=active (use setpoint)
<b>FC-1-IQ</b>	fc00..fc04	valve	r/o; 0=off, 1=on
		fan_speed	r/o; 0..3

From:

<https://wiki.hiq-universe.com/> -



Permanent link:

[https://wiki.hiq-universe.com/doku.php?id=en:hiq\\_home:applications:my\\_hiq](https://wiki.hiq-universe.com/doku.php?id=en:hiq_home:applications:my_hiq)

Last update: **2019/08/14 12:09**