

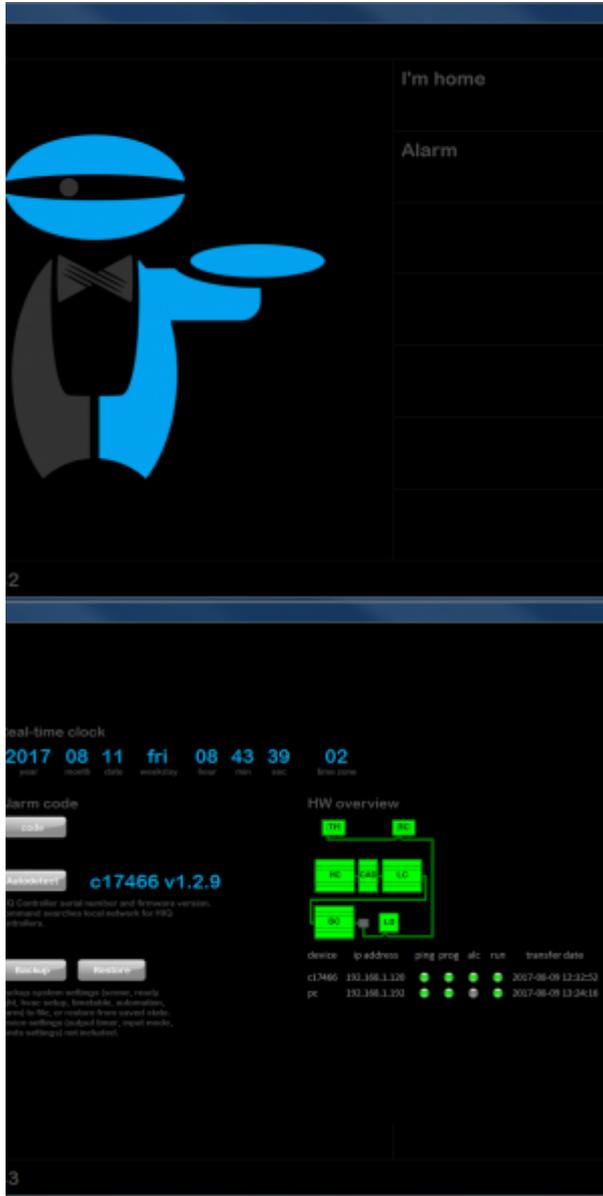


myHIQ

myHIQ is a custom application built for specific projects based on CybroMiniScada. It can be fully customized for end-user needs.

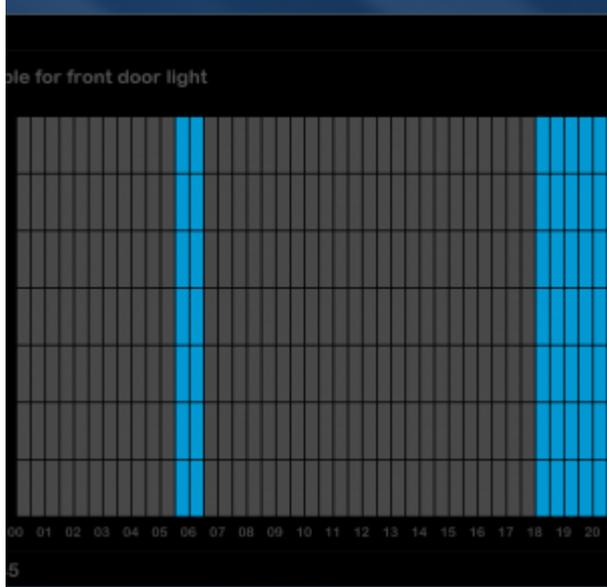

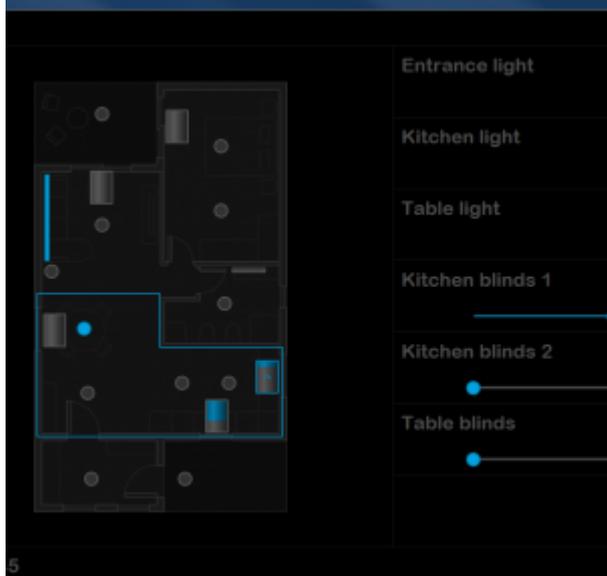

The interface is divided into three main sections. The top section features a floor plan on the left with a temperature callout showing 24.0 and 23.9. To the right, there are labels for 'Thermostat active' and 'Setpoint'. The middle section is a schedule grid titled 'Schedule for thermostat', with a 24-hour x 7-day grid where certain hours are highlighted in blue. The bottom section contains a mode selector with three icons (off, on, auto) and three temperature values: 25.0, 15.0, and 30.0.

6

6


6



[myHIQ demo app](#)

CyBroMiniScada variables

`c1000.lc00_qx00`

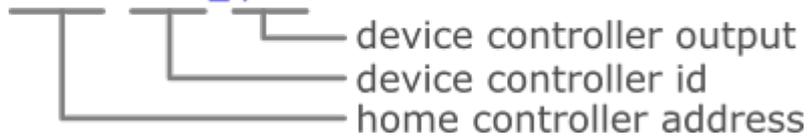

| | | |
|--------------------------------|--|---|
| home controller address | <code>c+home controller address</code> | find on silver sticker on top of HC-HIQ |
|--------------------------------|--|---|

On/Off devices

All On/Off devices (lights, managed power sockets, exhaust fans, ...) are controlled by LC-10-IQ device controller. myHIQ application displays device status and allows to toggle device output.

Device controller variables

| HIQ-DC | id | output | description |
|-----------------|------------|------------|------------------|
| LC-10-IQ | lc00..lc04 | qx00..qx09 | r/w; 0=off, 1=on |

Dimmers

Dimmable dVICES (lights and some ceiling fans) are controlled by several device controllers, depending on controlled devices:

- LD-V4-IQ for LED stripes
- LD-P4-IQ for 230 V dimmable lights and ceiling fans
- LD-D8-IQ for DALI lights

myHIQ application displays the device's on / off status and output intensity, and allows to control both.

Device controller variables

| HIQ-DC | id | output | description |
|-----------------|------------|------------|------------------|
| LD-V4-IQ | ld00..ld04 | qx00..qx03 | r/w, 0=off, 1=on |
| LD-P4-IQ | | qw00..qw03 | r/w; 0..100 % |
| LD-D8-IQ | | | |

Blinds

Blinds are controlled by a BC-5-IQ device controller. myHIQ application displays and sets the blind position.

Device controller variables

| HIQ-DC | id | output | description |
|----------------|------------|------------------------|---------------------------|
| BC-5-IQ | bc00..bc01 | qxs00up..qxs04up | r/o; 0=off, 1=moving up |
| | | qxs00dn..qxs04dn | r/o; 0=off, 1=moving down |
| | | blinds_position_00..04 | r/o; 0..100 % |
| | | blinds_setpoint_00..04 | r/w; 0..100 % , -1=stop |

Scenes

Scenes are implemented directly in HIQ-HC. There is no need to use scene controller for using scenes from myHIQ application.

Home controller variables

| HIQ-HC variable | id | description |
|-----------------------|-------------|--|
| scene_status[0] | index=0..31 | r/o; 0=scene inactive, 1=scene active, 255=scene not defined |
| global_scene_request | / | w/o; 0..31=set scene 0..31, -1=idle |
| global_memory_request | / | w/o; 0..31=memorize scene 0..31, -1=idle |

Thermostats

Temperature regulation is done using TH-1M-IQ, TH-1T-IQ or TH-2-IQ thermostat and FC-1-IQ for fan-coils or HC-IQ for radiators.

Device controller variables

| HIQ-HC | | description | |
|---------------------------------|------------|----------------------------------|---|
| HC-IQ | hvac_mode | r/w; 0=off, 1=heating, 2=cooling | |
| HIQ-DC | id | output | description |
| TH-1M-IQ TH-1T-IQ TH-2-IQ | th00..th04 | setpoint | r/w; *0.1 °C (234=23.4 °C) |
| | | temperature | r/o; *0.1 °C (234=23.4 °C) |
| | | humidity | r/o; % RH |
| | | active | r/w; 0=inactive (uses idle setpoint), 1=active (use setpoint) |
| FC-1-IQ | fc00..fc04 | valve | r/o; 0=off, 1=on |
| | | fan_speed | r/o; 0..3 |

From:
<http://wiki.hiq-universe.com/> -

Permanent link:
http://wiki.hiq-universe.com/doku.php?id=en:hiq_home:applications:my_hiq&rev=1538744862

Last update: **2018/10/05 13:07**

