

Wireless Modbus Relay

Wireless Modbus Relay




| | |
|---------------|-----------------|
| Model number: | WR-1 |
| Frequency: | ISM 868MHz (EU) |
| Dimensions: | 93x45x27 mm |

Applications



- Remote controlled relay. Act as modbus RTU slave. Optimal for long range, no hopping.

Installation and mounting

-  Carefully open WR-1 module and configure serial communication with jumpers. (Default configuration is 9600bps, 8N1 with normal timeout)
-  Place WR-1 module at least 10cm from other objects. Installation is not recommended inside metal cabinets.
- Connect RS485 terminals to WR-1 RS485 terminals
 - A - A
 - B - B
 - C - GND
- Connect to 230V power supply
- Configure radio pairing

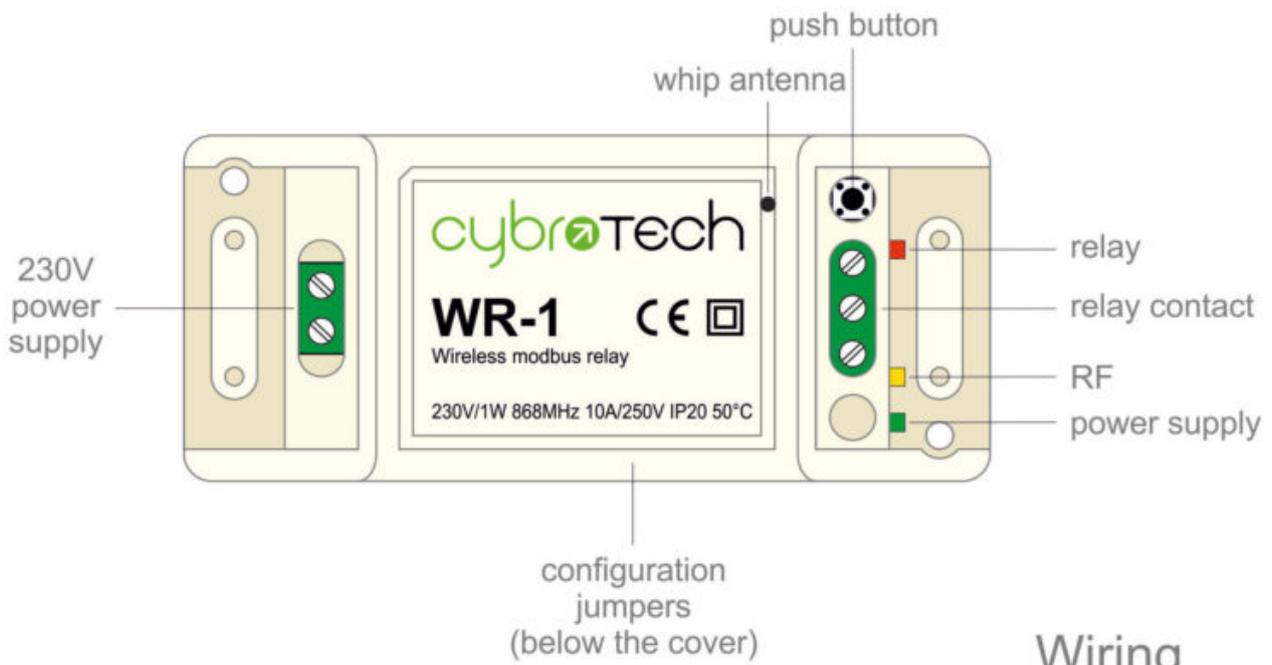

Wiring

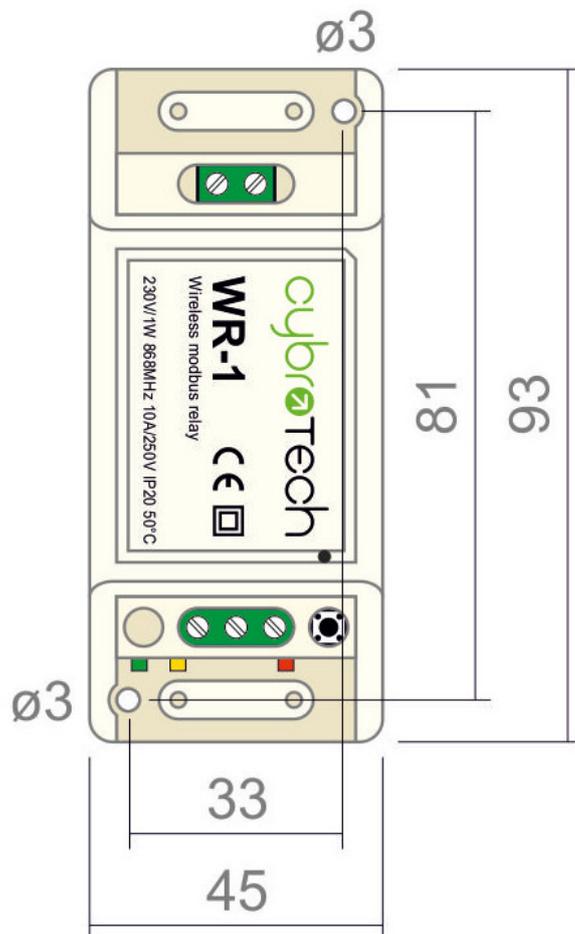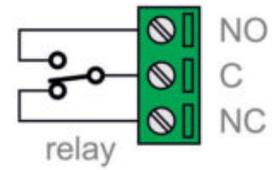

Features

- remote controlled relay
- act as modbus RTU slave
- very long range, no hopping
- up to 8 relays per network
- protected private connection
- multiple addressable groups

Technical specification

| | |
|------------------------|-------------------|
| Power supply: | 230V, 50/60Hz, 1W |
| Ingress protection: | IP20 |
| Operating temperature: | -20..50°C |
| Storage temperature: | -40..85°C |
| Relative humidity: | 0..85% n/c |

Modbus

| | |
|---------------------|---|
| Address range: | 200..207 |
| Relay mapping | coil 1(start address 00h) |
| Data bits & parity | 8n1 |
| Supported functions | 01 - read coil 05 - write single coil 15 - write multiple coils |

Relay output


| | |
|----------------|---------------------------------|
| Nominal rating | 10A 250Vac (NO), 3A 250Vac (NC) |
| (resistive) | 5A 30Vdc (NO), 3A 30Vdc (NC) |

Radio

| | |
|--------------------|---------------------------------|
| Frequency band | ISM 868MHz (EU) |
| Subband | L 866.8MHz, 25mW, 1% utility |
| Modulation | fSK 38.4kbps 80kHz bandwidth |
| Listen before talk | yes, delay limited to 20ms |
| Group address | 32-bit, automatically generated |
| Connection time | 10s power-on to network ready |
| Message delay | 5ms from tx start to relay on |
| Output power | 25mW |
| Operating range | 3..300m with optical visibility |

Terminals and wiring

| | | |
|-----------------|----------|-----------|
| To power sensor | A | RS485 bus |
| | B | |
| | C | |
| To power supply | L | 230V AC |
| | N | |

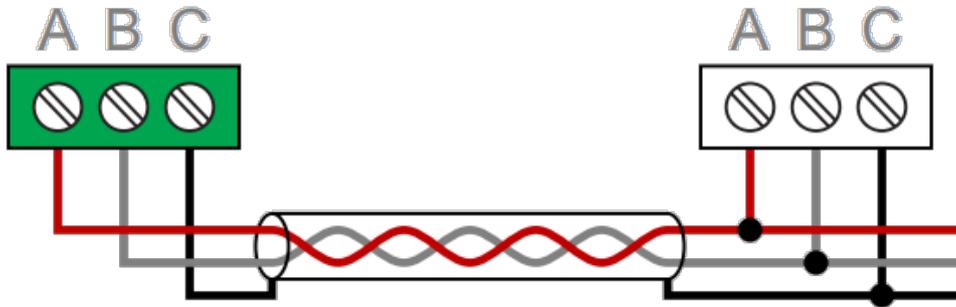


Serial configuration and timeout

- Available baudrates 2400, 9600, 19200, 38400 bps
- Data bits and parity 8N1, 7E1, 8E1, 8N2



- Max 64 bytes per transmission
- Integrated 240 Ohm termination resistor

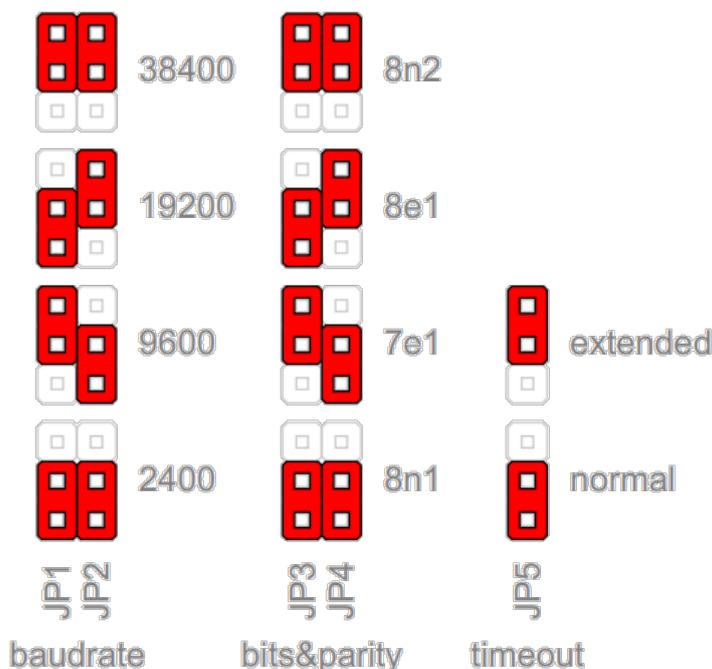


| | normal | extended |
|-------|--------|----------|
| 2400 | 25ms | 200ms |
| 9600 | 10ms | 100ms |
| 19200 | 5ms | 100ms |
| 38400 | 5ms | 100ms |

Radio pairing configuration


Create new secure group

- * turn on all devices as the same time
- * within 10 seconds, while RF LED is blinking, press and hold button on one of the devices
- * after a second, the new address is randomly generated and sent to all devices. RF LED will blink 3 times to confirm the new address.

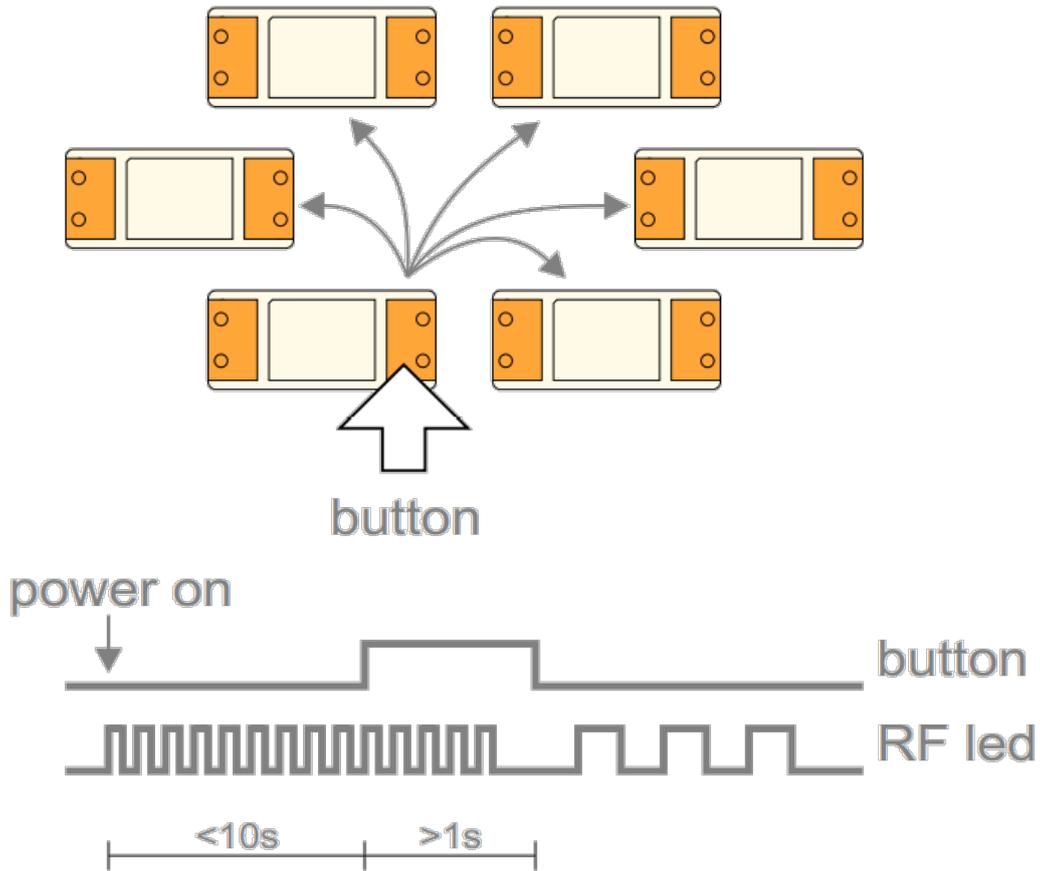


Add new device to the group


- * turn on the device
- * within 10 seconds, press and hold button on one of the existing devices
- * after a second, the existing group address is sent to the new device. RF LED will blink 3 times to confirm the address is sent.

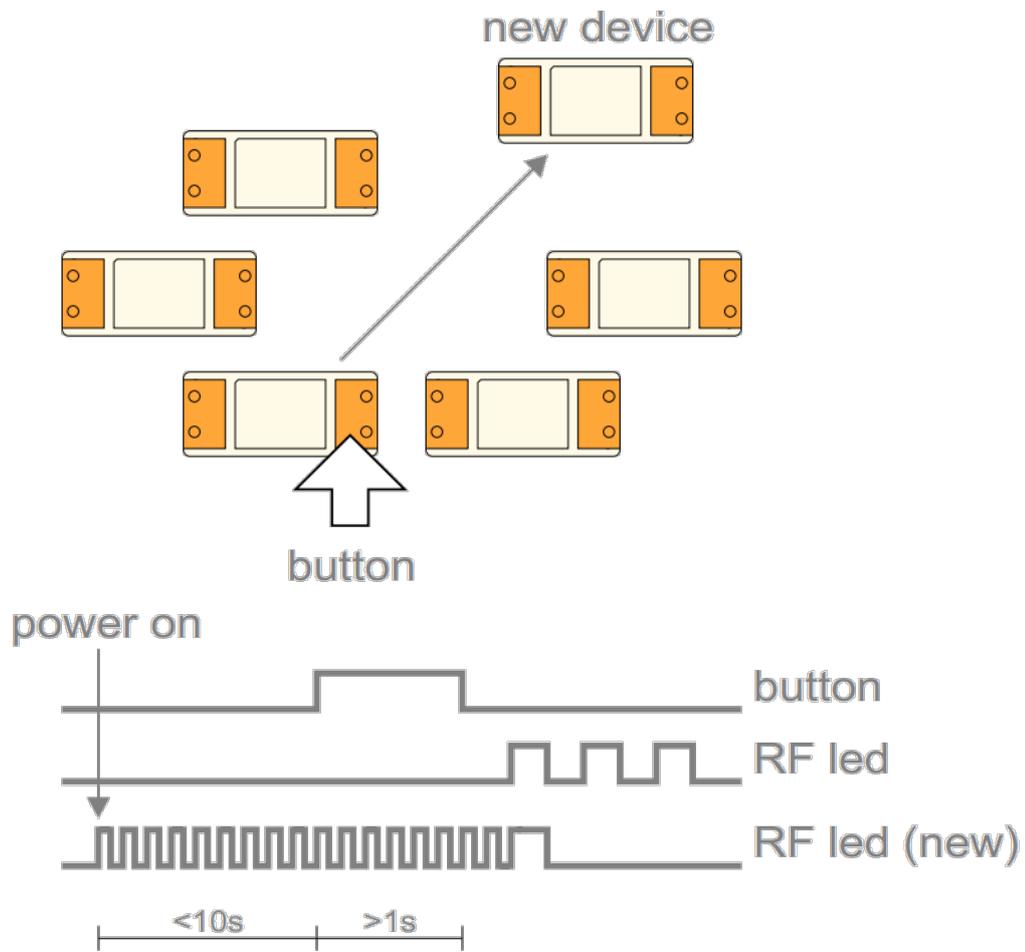

Examples

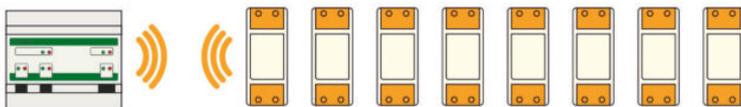

Cybro-3-RFM, acting as modbus master, connected to 8 wireless relays (200..207).

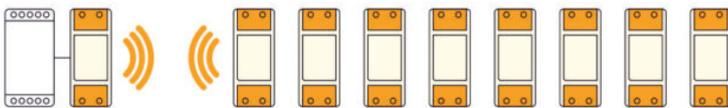

Any modbus master, connected to 8 relays using WM-1 device as wireless adapter.

Connection check


- press the button shortly

With each press of the button, the relay will switch on/off. Other devices are not affected.



Factory reset

- Hold button and turn the device ON
- RF led will blink twice. Group address is now reset to default.
- Other devices will not be affected.

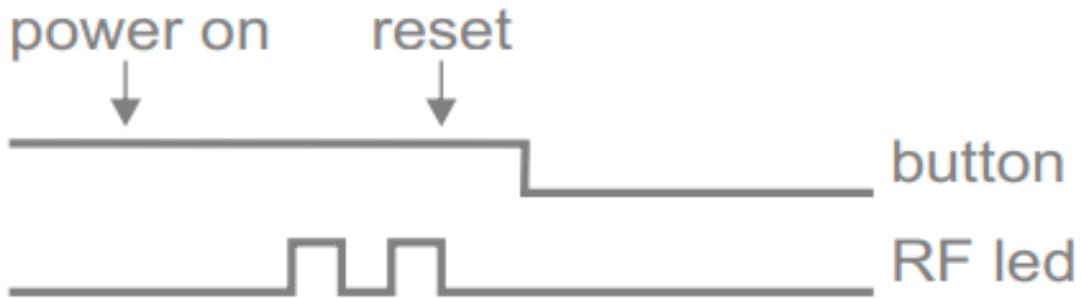

From:
<http://wiki.hiq-universe.com/> -

Permanent link:
http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:wr-1&rev=1669733099

Last update: **2022/11/29 14:44**

