

# Motion sensor

## Passive infrared detector long range



Model number:	<b>IR-A12W-LC</b>
Connects to:	digital input
Mounting:	Any
IP rating	IP65

## Applications

- Motion detector
- Intrusion detector
- Corridors lighting control
- Parking lighting control
- Outdoor lighting control

## Features

- Robust design


## Colours




## Installation instruction


- Do not install the detector at position which faces direct or reflected sunlight or near windows with direct car headlight.
- Ensure that there are no obstructions (plants, screens, furniture etc.) in the field of view that may cause incorrect cover/operation of the detector.
- Avoid locating the detector in areas that contain equipment that may change the environment temperature rapidly (i.e. above radiator or under the air-conditioner)
- Install the detector at proper height on a rigid surface. Do not install the detector on vibrating surface.
- PIR detector is more sensitive to the motions “across” the detection zones than “toward” or “away”.

# Dimensions

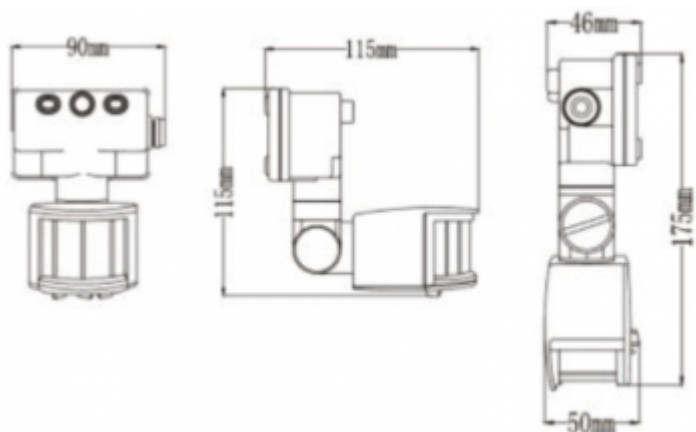

# Detection pattern and range

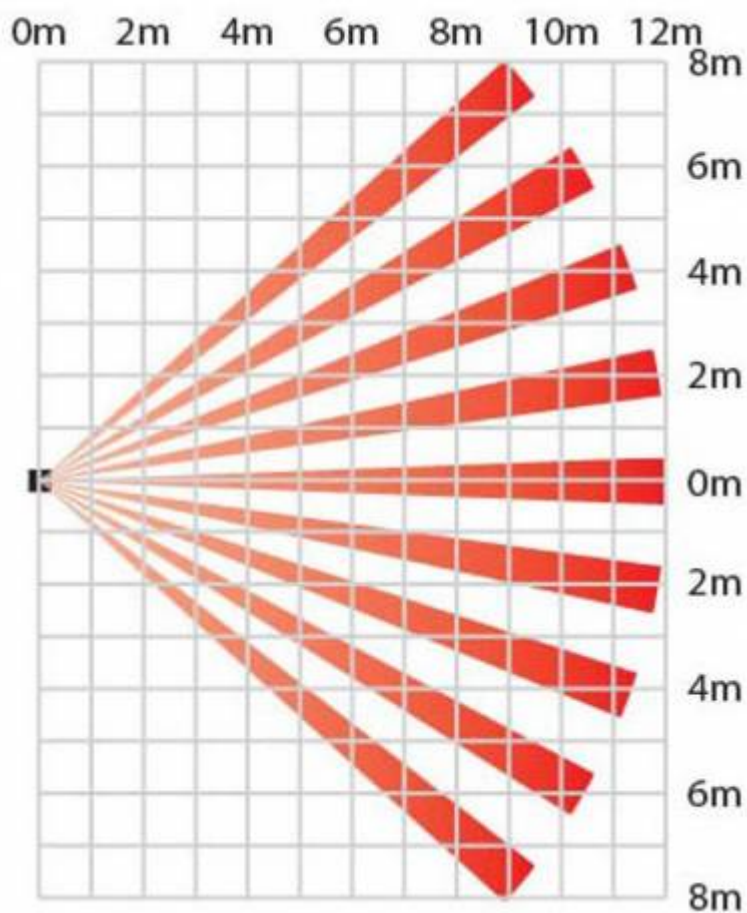

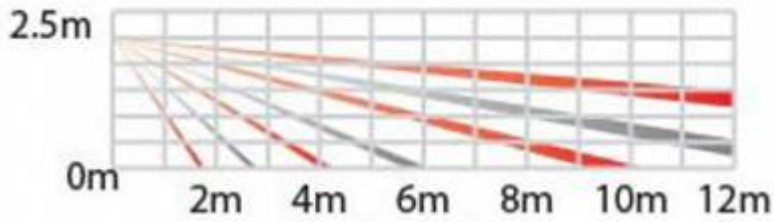

## Technical specifications

Power supply	24 VDC
Power consumption	0.1 - 1 W
Temperature	-20°C ~ 40°C

## Terminals

Power supply	+	Power supply
	-	
HIQ digital input	S	Digital output

From:  
<https://wiki.hiq-universe.com/> -

Permanent link:  
[https://wiki.hiq-universe.com/doku.php?id=en:ms\\_main:ir-a12w-lc](https://wiki.hiq-universe.com/doku.php?id=en:ms_main:ir-a12w-lc)

Last update: **2020/05/26 08:32**

