
Robotina Battery Management System

General description

This system comprehensively measures the battery performance, and displays the real-time parameters and real-time alarm for the failed battery to realize the automation of battery detection and failure expected detection. Through real-time monitoring of the battery power parameters and operating status obtained by the Controller, the actual operating status and health status of the battery pack can be accurately grasped, and problems existing in the use of the battery pack can be found in time. The HMI touch display displays the power data, health status and alarm reminder of each battery in real time. The cell sensors detects the condition of each battery in real time, and gives a timely alarm to the bad battery, so as to accurately grasp the actual running state and health of the battery pack in real time, and to timely find problems in the use of the battery pack. This not only effectively extends the backup time and operating life of the battery pack, but also greatly reduces the maintenance costs such as manpower and material resources. It also improves the safety of battery use, reduces the accident rate and effectively saves energy and reduces emissions, creating for the user and create good economic and social benefits for the users.

System diagram

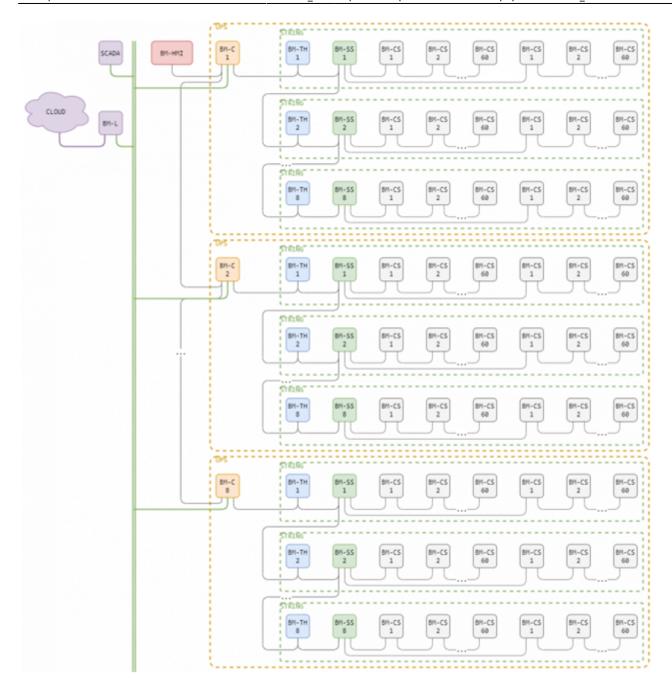


Dictionary of terms and abbreviations

втмѕ	Batery Management System	Battery monitoring system for larger UPS systems.
battery	-	Lead-acid rechargeable battery stores electricity to operate the UPS during a power outage.
cell	-	Basic battery building. A battery usually consists of several cells connected in series.
string	-	Multiple batteries connected in series.
UPS	Uninterruptible Power Supply	A device that provides battery backup when the electrical power fails or drops to an unacceptable voltage level.
BM-CS	Battery Cell Sensor	Sensor that monitors the status of an individual cell or battery.
BM-SS	Battery String Master	A sensor that connects the BM-CS and monitors the state of the string.

вм-нѕ	Hall Sensor	Direct current sensor that operates on the basis of the Hall effect.
вм-тн	Temperature and Humidity Sensor	Measurement of ambient temperature and relative humidity.
вм-с	Master Controller	A controller that allows monitoring the status of several BSMs, displaying the status of batteries and strings on the TD and serving data to the control system.
вм-нмі	Touch Display	Graphic display with touch screen.
BM-L	IOT Linker	Enables secure connection to the online cloud service.

Wiring diagram

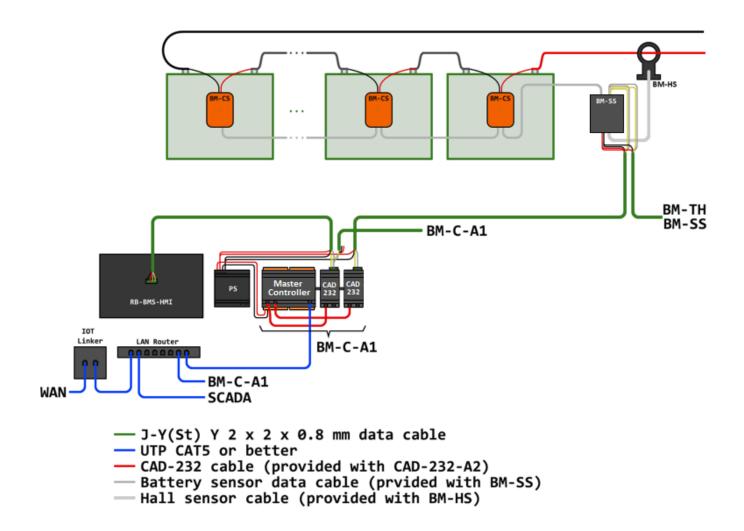

System components

BM-C Master Controller



Order code: **BM-C-A1**

Highlights & Features

- Full control for an UPS system
- Supports up to:
 - 8 strings (8 BM-SS)
 - 960 batteries (8 BM-SS * 120 BM-SC)
- Standard Modbus/TCP connectivity to SCADA systems

Technical specification

Power supply	Nominal	24 VDC	
Power suppry	Range	18 28 VDC	
Power consumption	Typical	150 mA	
Power Consumption	Max	280 mA	
Digital outputs	relay 8A/250VAC or 8A/30VDC resistive		
Operating conditions	050°C, 085% rh non-condensing		
	width	185 (110+2×37,5) mm	
Dimensions	height	103 mm	
	depth	51 mm	

More on: http://wiki.hiq-universe.com/en/hiq_hw/mc-230

BM-CS Cell sensor



Order code	BM-CS-12	for 12 V battery for 2 V battery
Order code.	BM-CS-02	for 2 V battery

Highlights & Features

- Real-time cell voltage measurement
- Internal resistance measurement on line
- Negative pole temperature measurement
- Balancing function

Technical specification

Dower cumply	BM-SS-02	2 VDC (1.6 2.6 VDC)	
Power supply	BM-SS-12	12 VDC (7.5 15.6 VDC)	
Power loss	BM-SS-02	110 mW	
Power 1055	BM-SS-12	90 mW	
Operating temperature	standard	0 45 °C	
Operating temperature	max	-10 55 °C	
Storage temperature	-40 70°C	-40 70°C	
Operating humidity	5 95 % RH, Non condensing		
	width	60 mm	
Dimensions:	height	80 mm	
Difficusions.	height max	95 mm	
	depth	25 mm	
	BM-SS-02	1.6 2.6 VDC	
Voltage measurements	BM-SS-12	7.5 15.6 VDC	
voitage illeasurements	accuracy	±0.2 %	
	resolution	0.001 V	

	range	0.1 50 mΩ
Resistance measurements	consistency	±(1.5 % + 25 μΩ)
Resistance measurements	repeatability	±(1.0 % + 25 μΩ)
	resolution	0.001 mΩ
Balancing	Current	0.2 A
	Time	1 min

LED indicator


Normal operation	Green LED breathing mode
Alarm	Red LED flashing

Battery SOC is calculated using the default battery characteristic parameters:

Battery voltage level	2 V	12 V
Float range	-0.02 C* .	. +0.02 C*
Float voltage	2.23 V	13.38 V
Cut-off voltage	1.75 V	10.8 V
Recovery voltage	2.12 V	12.68 V

^{*} C is the battery capacity

Wiring & Mounting



Directly on the battery/cell with the included double-sided sticker





Use the supplied cable with U spade terminals directly for battery/cell wiring

BM-SS-A1 String master



Order code: **BM-SS-A1**

Highlights & Features

- Real-time monitoring of string voltage, charge-discharge current, charge-discharge state and string SOC.
- Monitor the voltage, impedance, temperature, SOC and SOH of each battery with BM-CS cell sensors and the specially designed isolated power bus.
- Advanced one-step auto-sensing for individual address. No more manual intervention and setup needed, reducing workload and setup errors.
- Advanced measurement algorithm, no need to discharge large current and measurement can be lossless.
- Balancing function: Keep voltage balanced during the floating charge process of battery pack, keeping the individual battery in the best state, extending backup time and life span of battery pack.
- Communication is based on power-isolated RS485. Secure and stable.
- Quickly locate the alarmed or faulty battery pack in machine room.
- External open Hall Sensor, measuring charge-discharge current in different ranges.
- Isolated voltage in communication interface: AC 3750V
- Supports up to 120 batteries (BM-CS)

Technical specification


Power supply	Nominal	24 VDC
	Range	12 36 VDC
Power loss	≤ 2W	
Operating temperature	Standard	0 45 °C
	Limit	-10 55 °C
Storage temperature	-40 70 °C	
Working humidity	5 95 %RH, non-condensing	

	Width	85 mm
Dimensions:	Height	105 mm
Dillielisiolis.	Height max	120 mm
	Depth	39 mm
Voltage measurements	Range	20 800 VDC
	Accuracy	± 0.5 %
	Resolution	0.01 VDC
Current measurements	Range	-1000 1000 A
	Accuracy	± 2 %
	Resolution	0.01 ADC

LED indicator

Normal operation	Green LED
Alarm	Red LED

Wiring

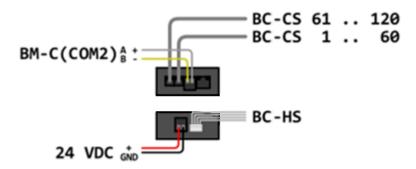

BM-HS Hall Sensor



	BM-HS-50	50 A
	BM-HS-100	100 A
Order code:	BM-HS-200	200 A
Order code.	BM-HS-300	300 A
	BM-HS-400	400 A
	BM-HS-500	500 A


Highlights & Features

• easy installation (split core)

Technical specification

Dimensions:	width	95 mm
	height	80 mm
	depth	25 mm
	core inner diameter	40 mm
Current measurements	BM-HS-50	0 50 ADC
	BM-HS-100	0 100 ADC
	BM-HS-200	0 200 ADC
	BM-HS-300	0 300 ADC
	BM-HS-400	0 400 ADC
	BM-HS-500	0 500 ADC
	Resolution	0.01 ADC

Wiring



Optional, limited by the length of the included cables
For proper mounting, an arrow is marked on the sensor to indicate the direction of the electric current

From

http://wiki.hiq-universe.com/ -

Permanent link:

http://wiki.hiq-universe.com/doku.php?id=robotina_bms&rev=1650957151

Last update: 2022/04/26 07:12

