


HIQ UNIVERSE

HIQ Universe is a cloud service that enables:

- An overview of current power consumption and
- An overview of the history of electrical power and energy consumption and production.

Access point: <https://my.hiq-universe.com>

HIQ Universe Log-in

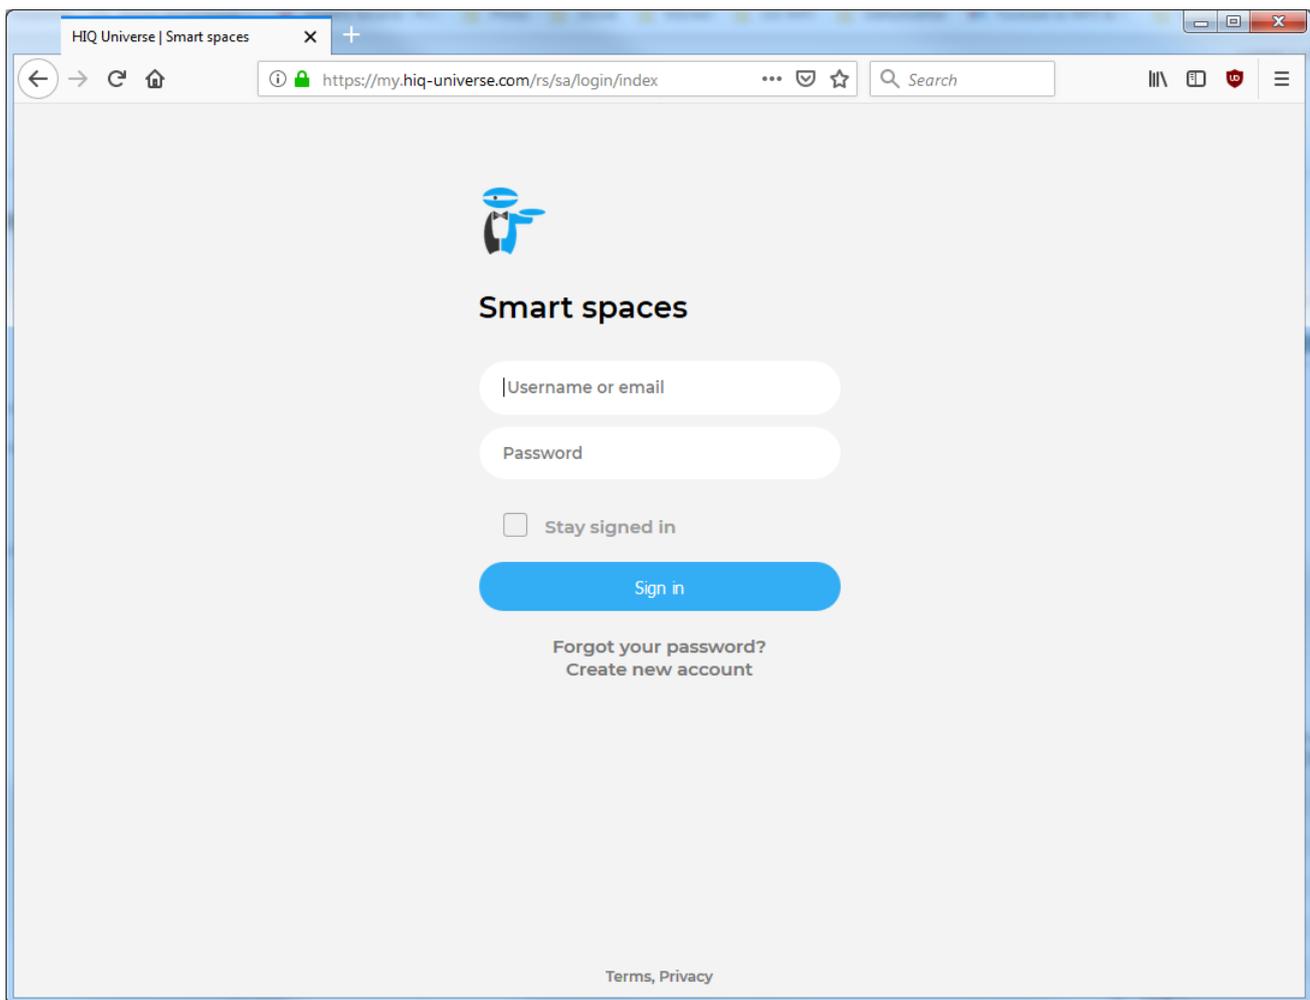


Log in with your username or email and password to see your [HIQ Universe subscription dashboard](#).

To reset forgotten password click on "[Forgot your password?](#)"

To create new account click on "[Create new account](#)".

Create HIQ Universe account

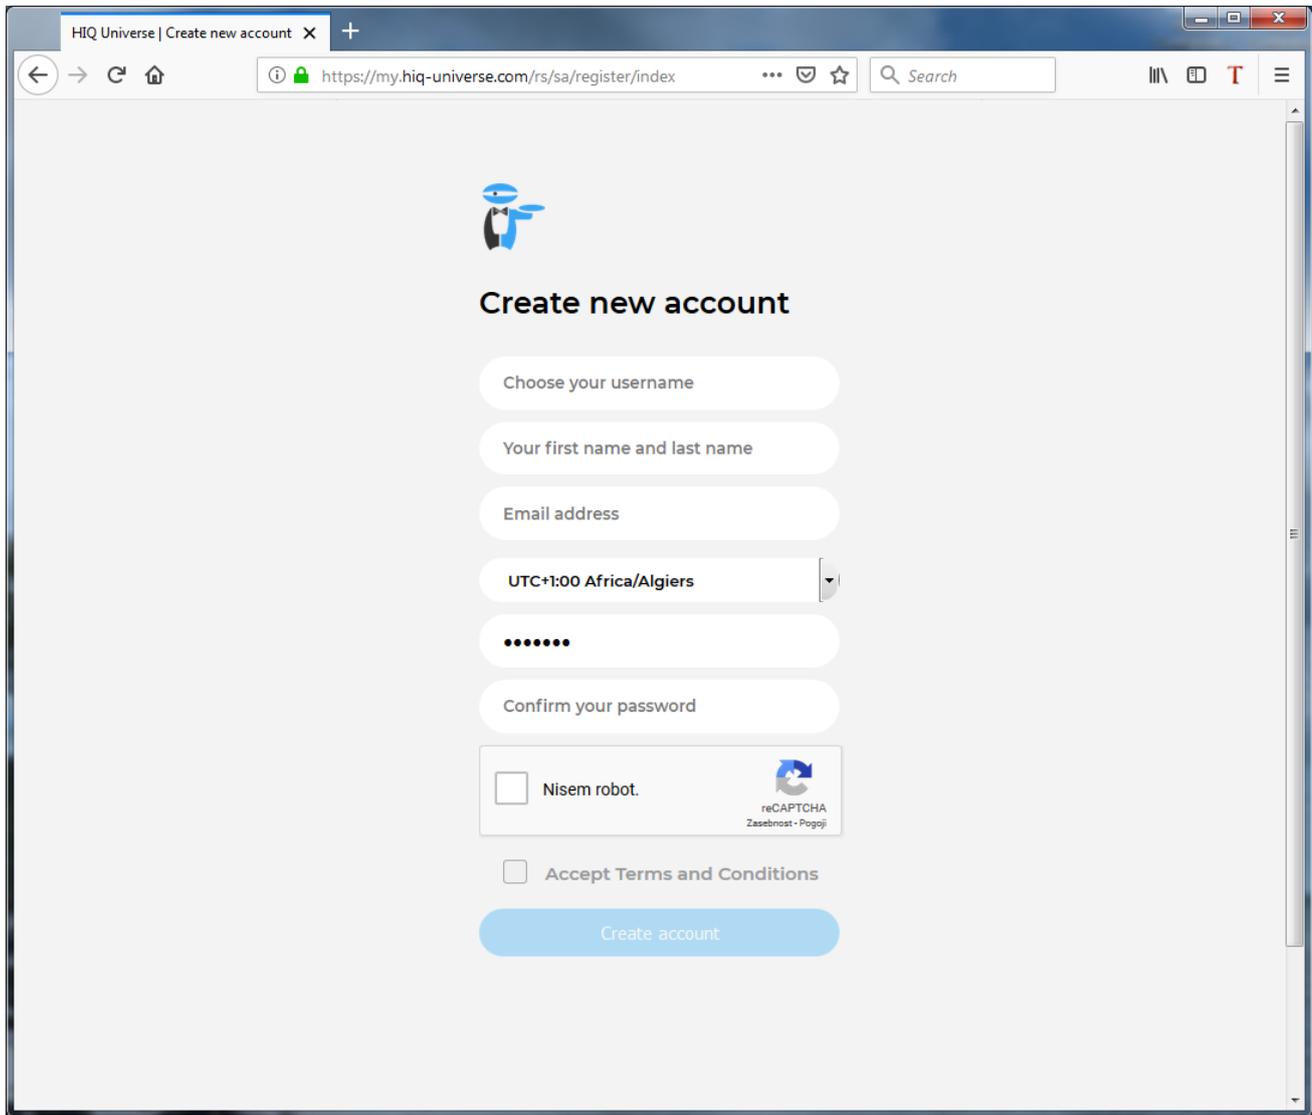

In the appropriate fields, enter:

- Username
- First and Last name
- E-mail address
- Timezone
- Password

Click on "I'm not a robot"


Accept Terms and Conditions.

Click on Create account.

A confirmation link will be sent to your email address.

Proceed to "[HIQ Universe Log-in](#)" screen.

Reset forgotten password

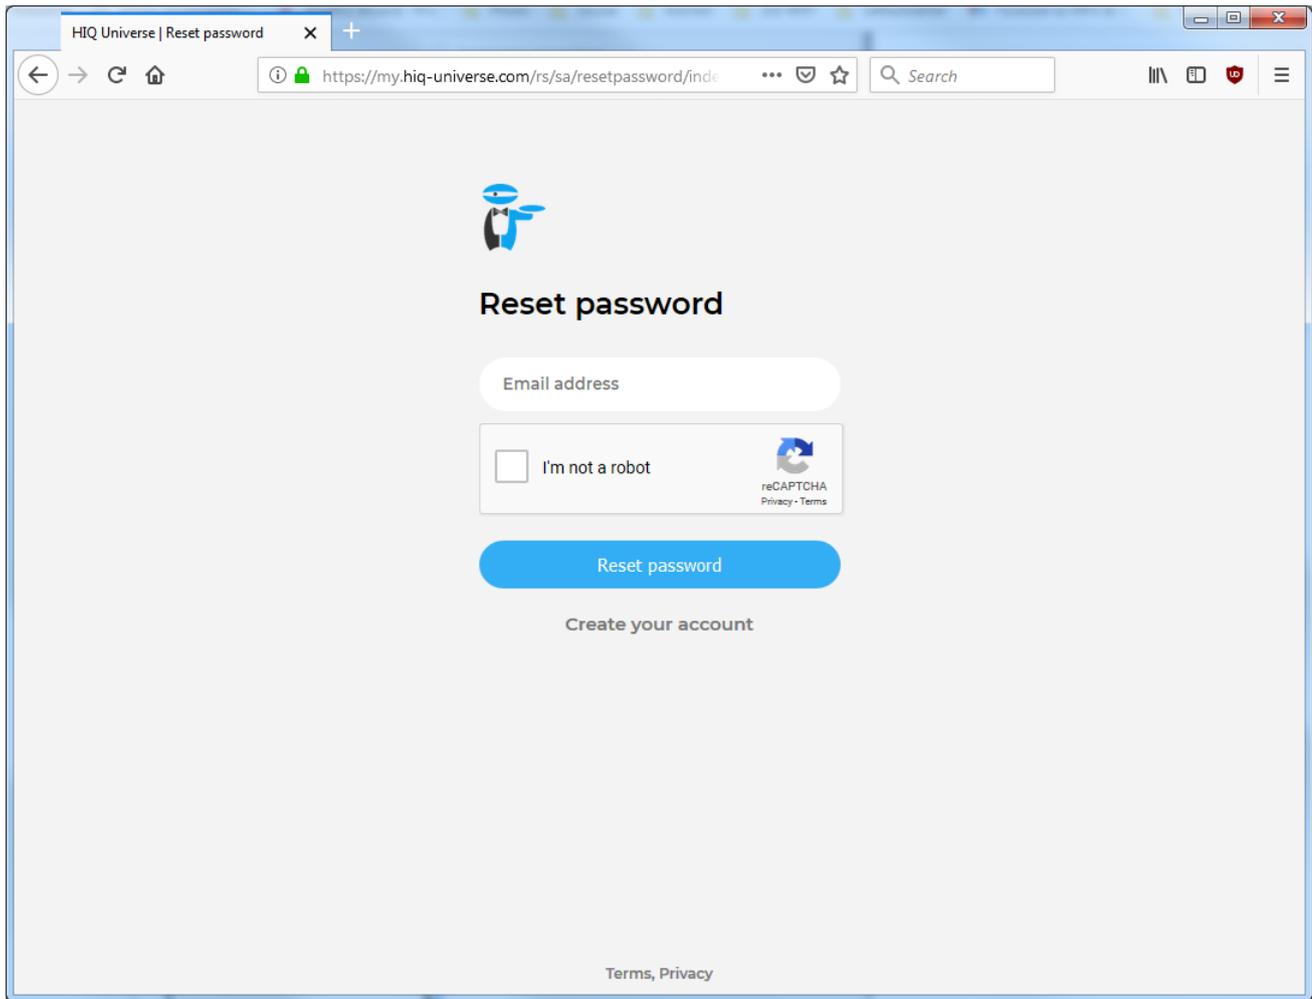


In the appropriate field, enter email address.

Click on "I'm not a robot"

Click on "Reset password".


You will receive email with password reset link.

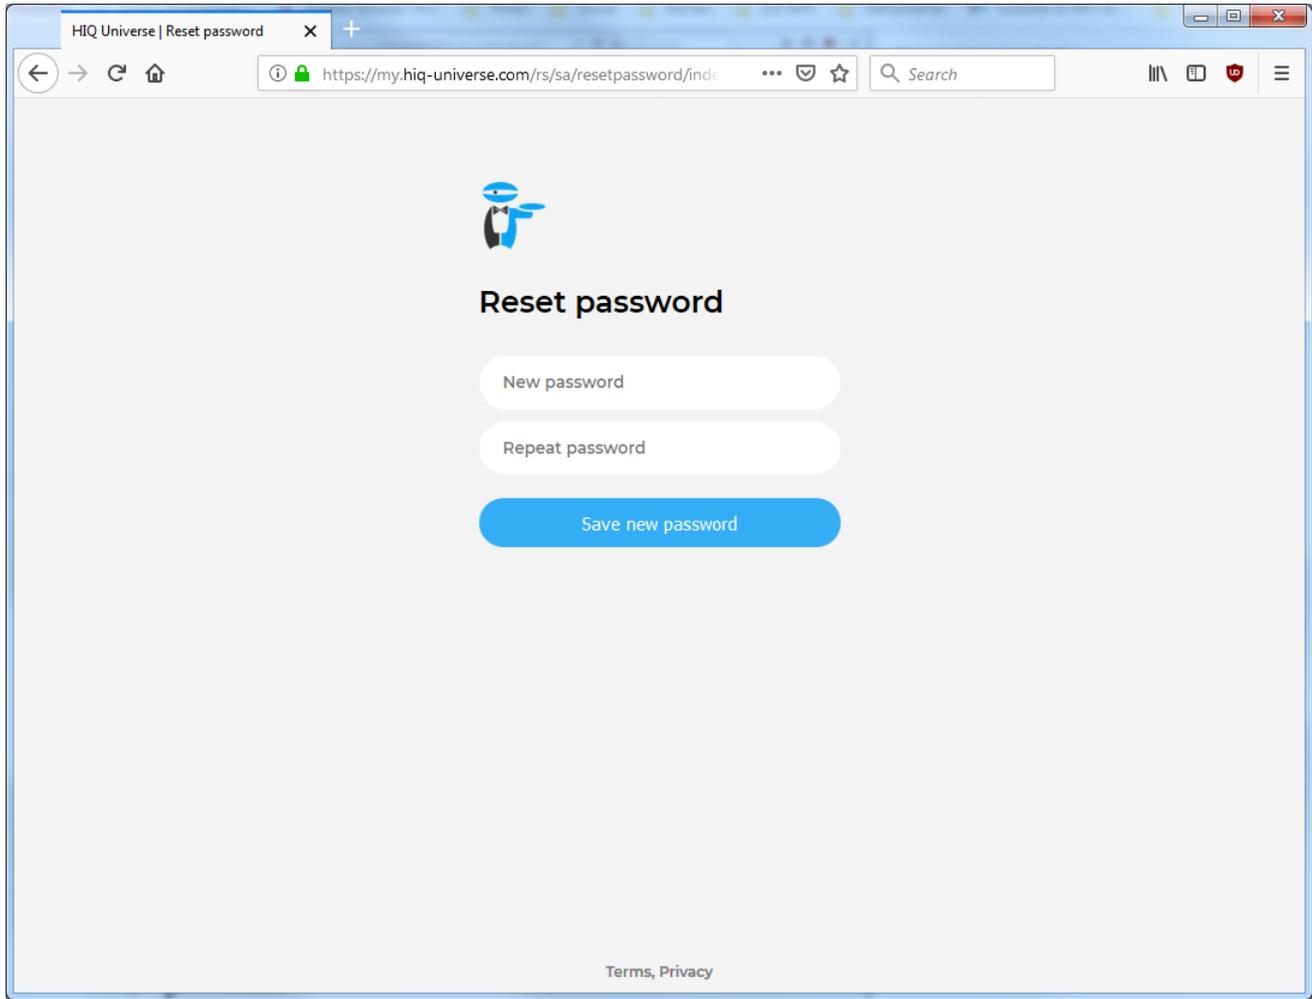

Enter new password and click on "Save new password".


Proceed to ["HIQ Universe Log-in"](#) screen.

Add HEMS controller

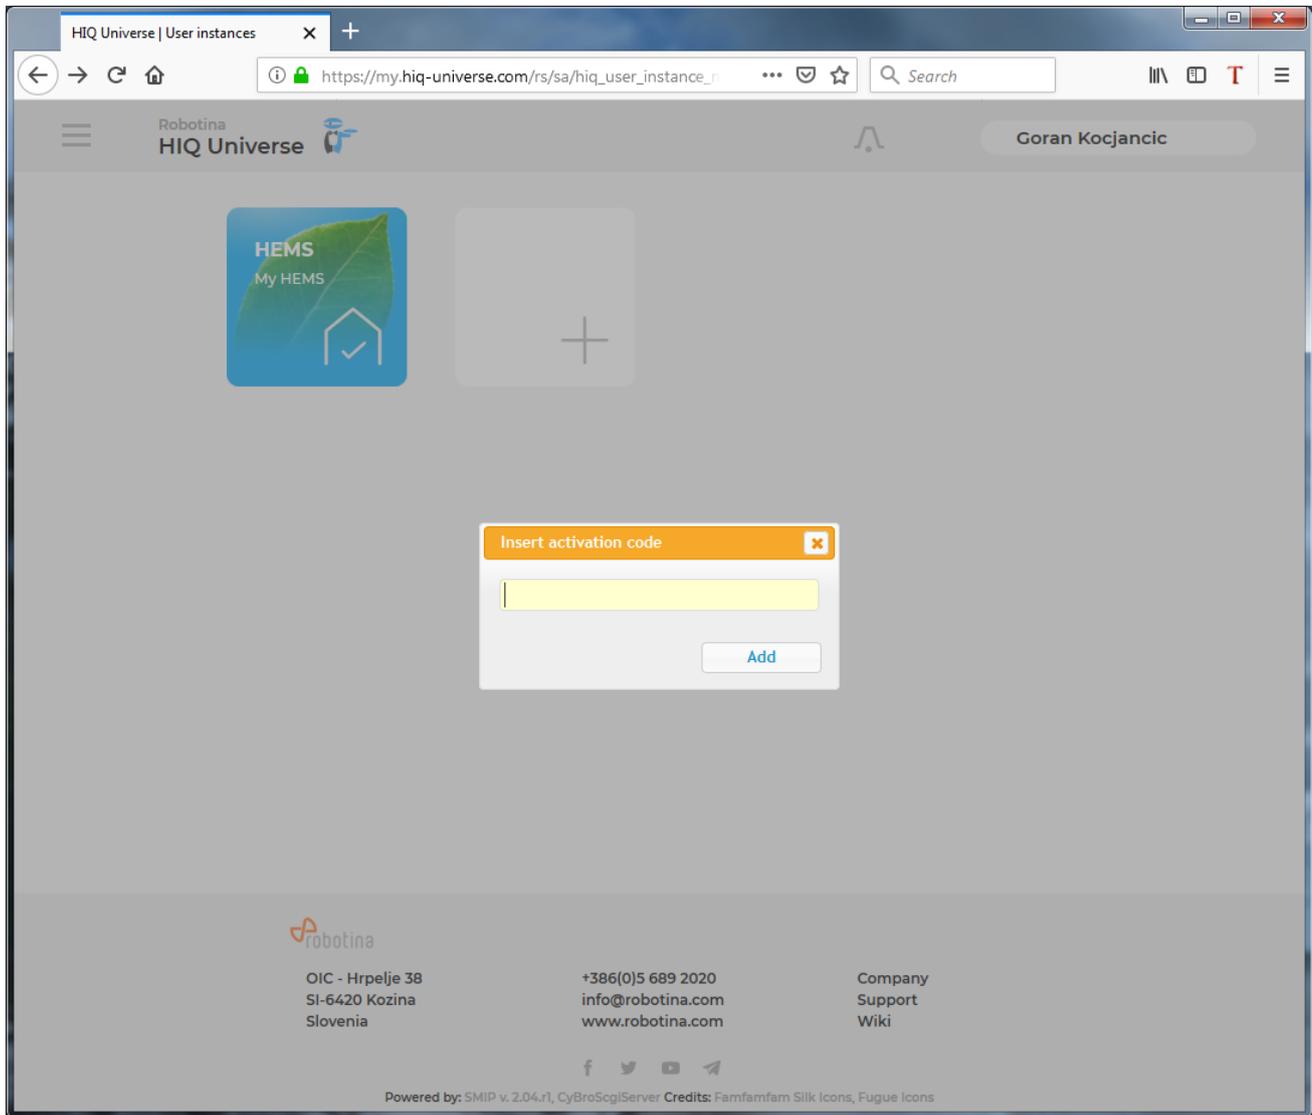

Enter HiQ universe activation code that you received from your installer.

HIQ Universe subscription dashboard

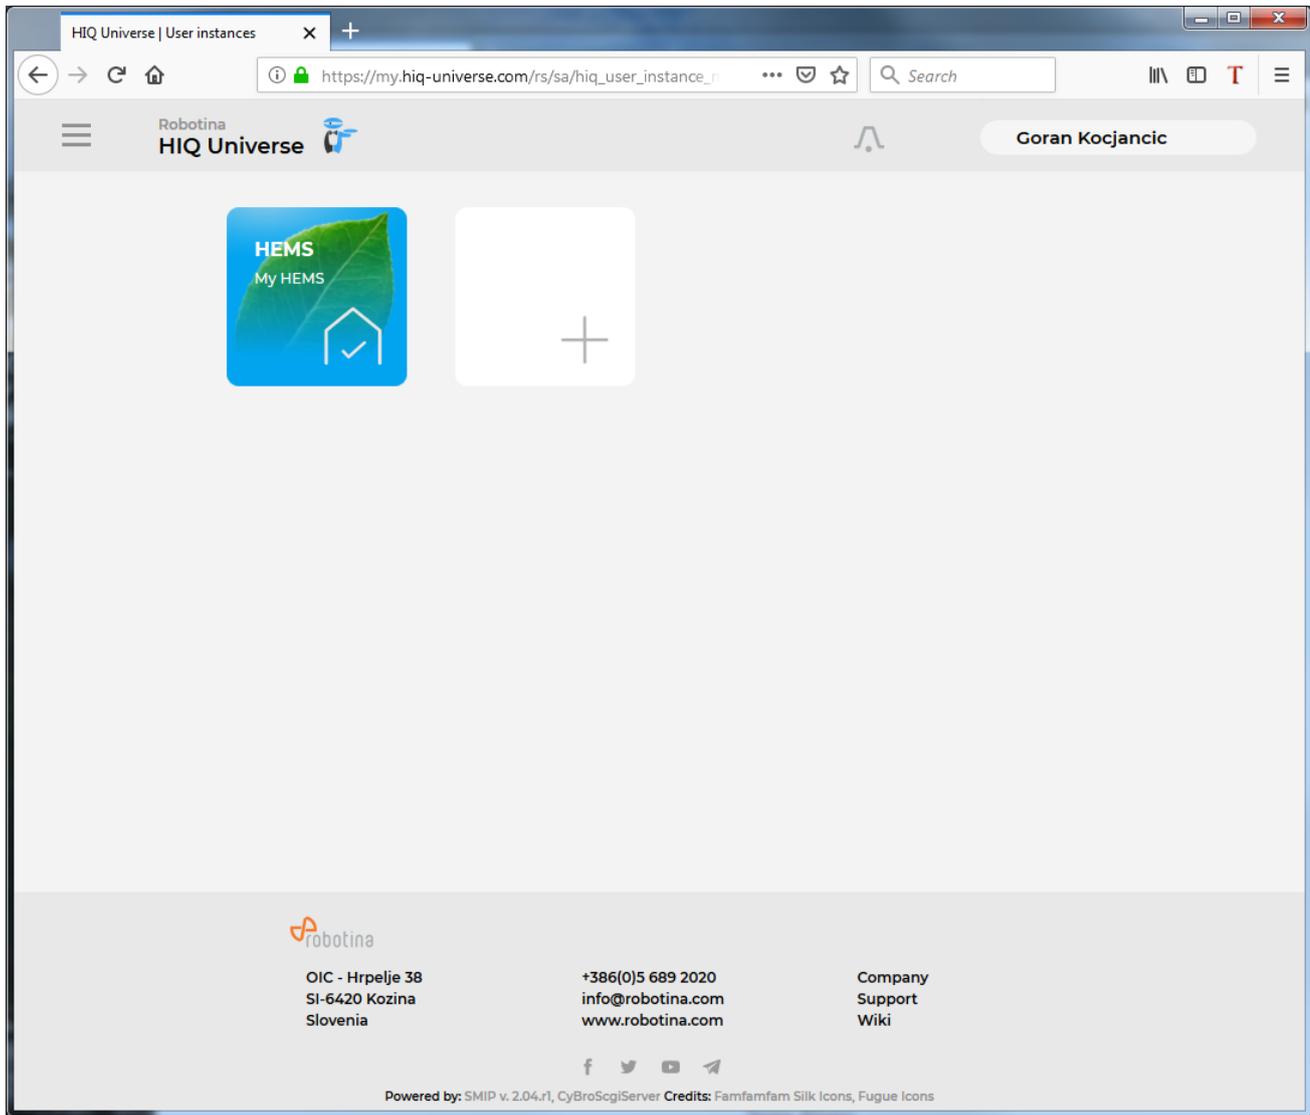


You will see tiles for all your subscribed HIQ Universe devices and services.

Go to [Main HEMS view](#) by clicking on HEMS tile or

add [new HEMS device](#) by clicking on blank tile with + sign.


["User profile set-up"](#) is invoked by clicking on user name on top right.

Main HEMS view

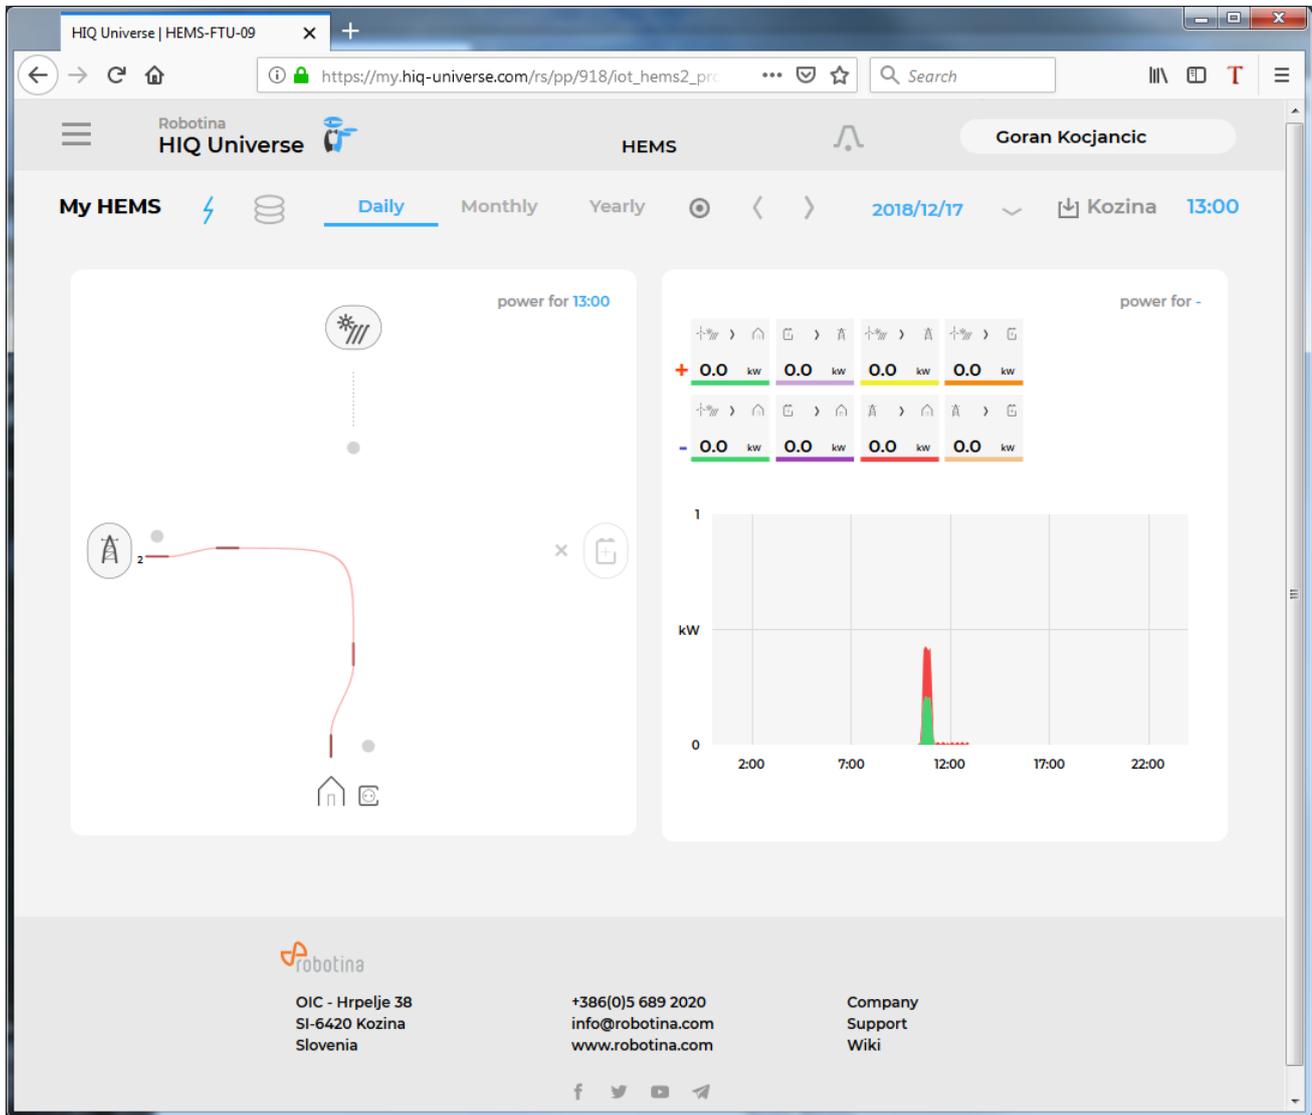

Main HEMS page consists of 3 sections:


- "Title and view selection row" at the top
- "Power flow chart" on left side
- "Power and energy time-plot" on right

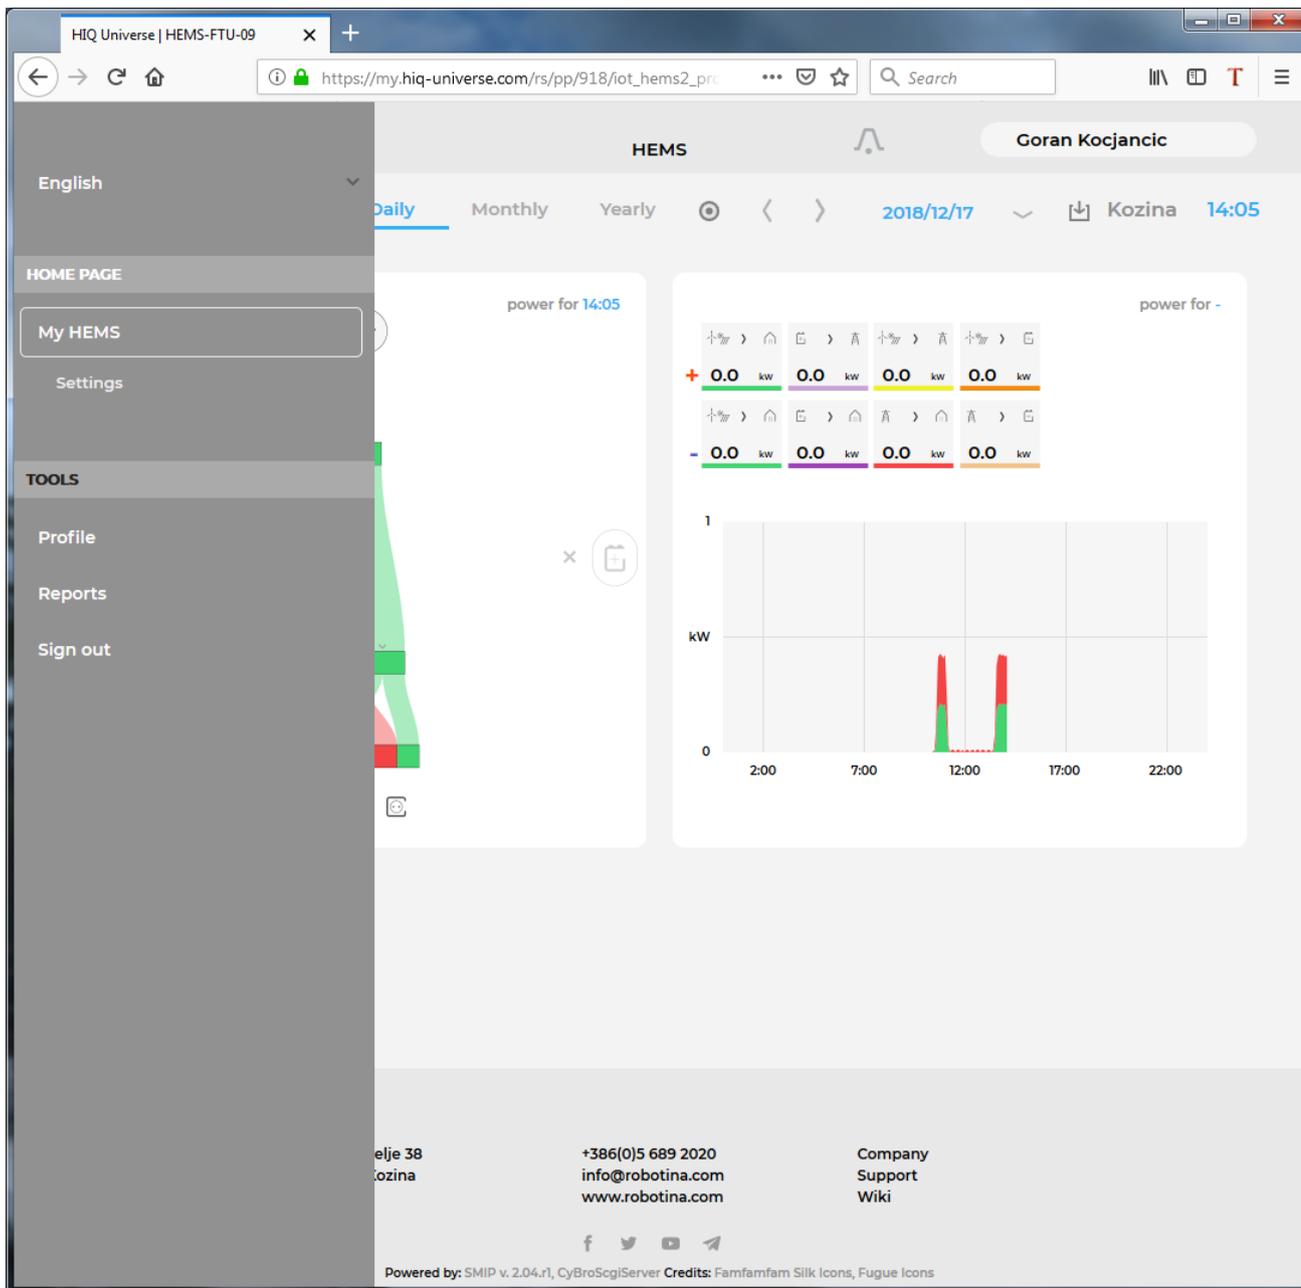

Side menu is activated by clicking menu icon (tree vertical lines at top-left). Menu items are dynamic created so can be different for each user. Typical menu items from top:

- Language selection
- Home page → section with all your subscribed HIQ Universe devices and services
 - MyHems → "Main HEMS view"
 - Settings → "HEMS settings"
- TOOLS → section with general site tools
 - Profile → "User profile set-up"
 - Sign out → Log off from HIQ Universe


Title and view selection row



From the left:

- HEMS name
- Lighting icon → time-plot displays energy or power
- Money icon → time-plot displays currency
- Daily → time-plot displays power
- Monthly → time-plot displays energy per day
- Yearly → time-plot displays energy par month
- Target icon → time-plot go to now
- < → time-plot goes to previous term
- > → time-plot goes to next term
- Date → Select term for time-plot
- Download icon → Download “csv” data for displayed time-plot period
- Location of HEMS installation
- Time at HEMS installation site.

Power flow chart

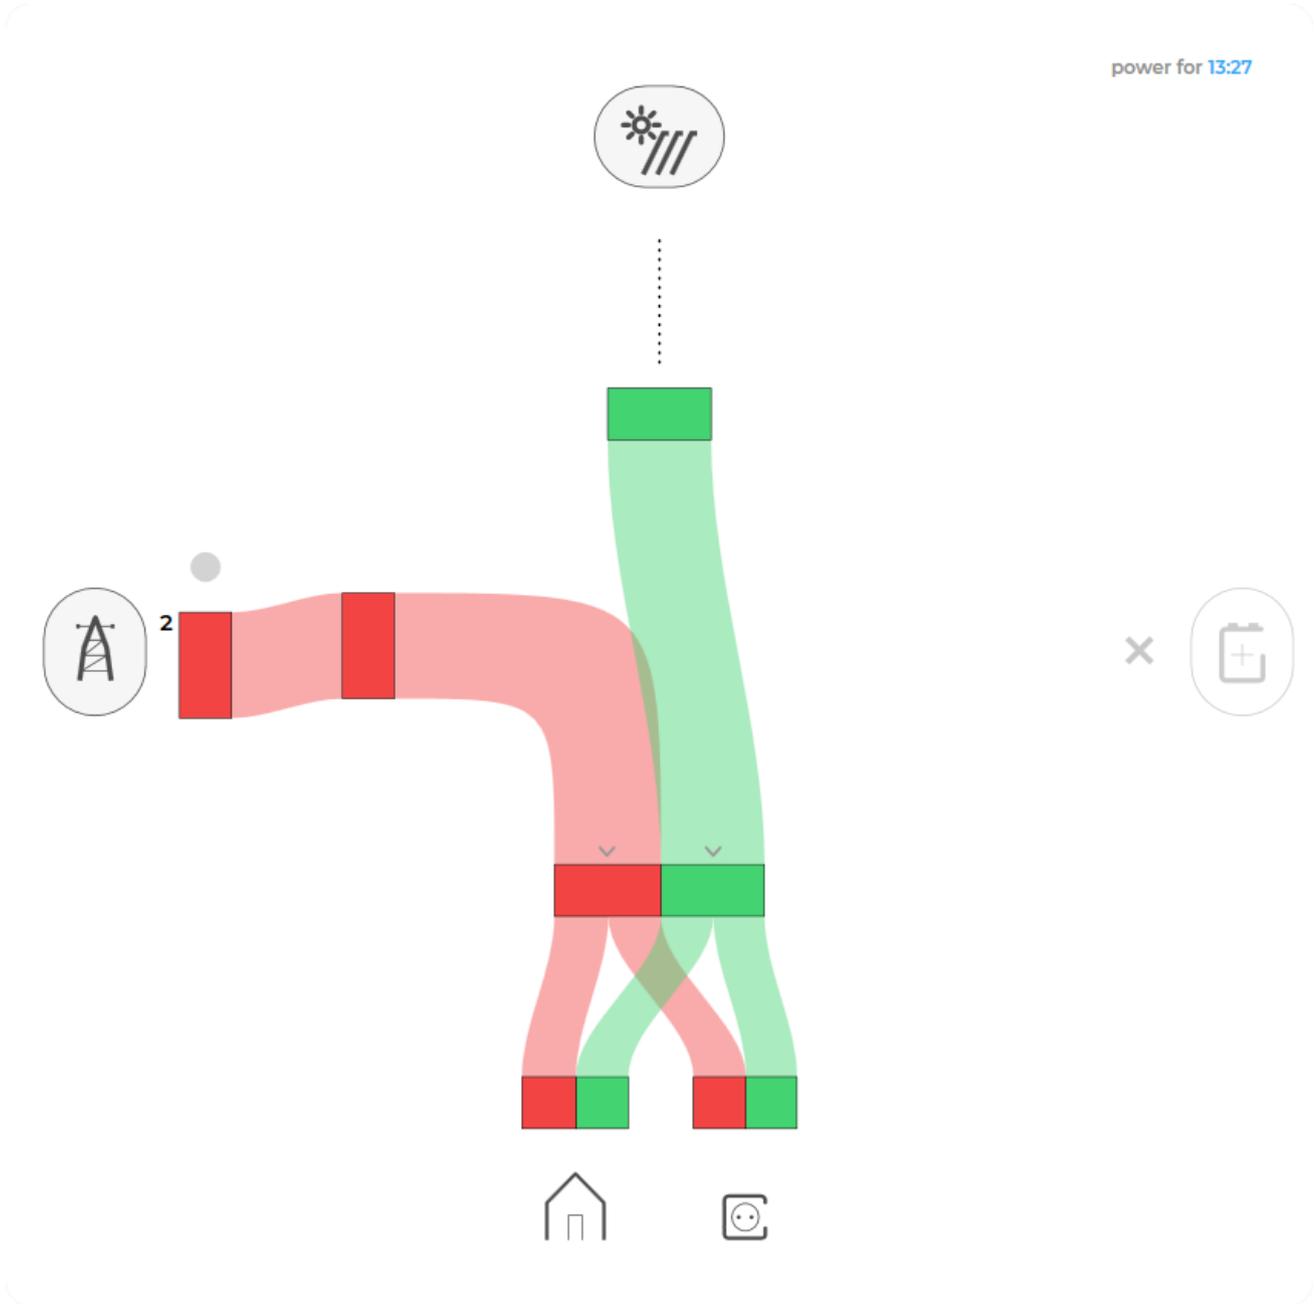


Displays actual power flow with:

- Power sources (Local PV, wind, co-generation plants) at top
- Grid (divided by tariffs) on left side
- Storage (battery) systems on right side and
- Consumers on bottom.

Unused items are soft greyed out with X. Items without actual power are displayed as dots.


Power and energy time-plot

power for 10:55

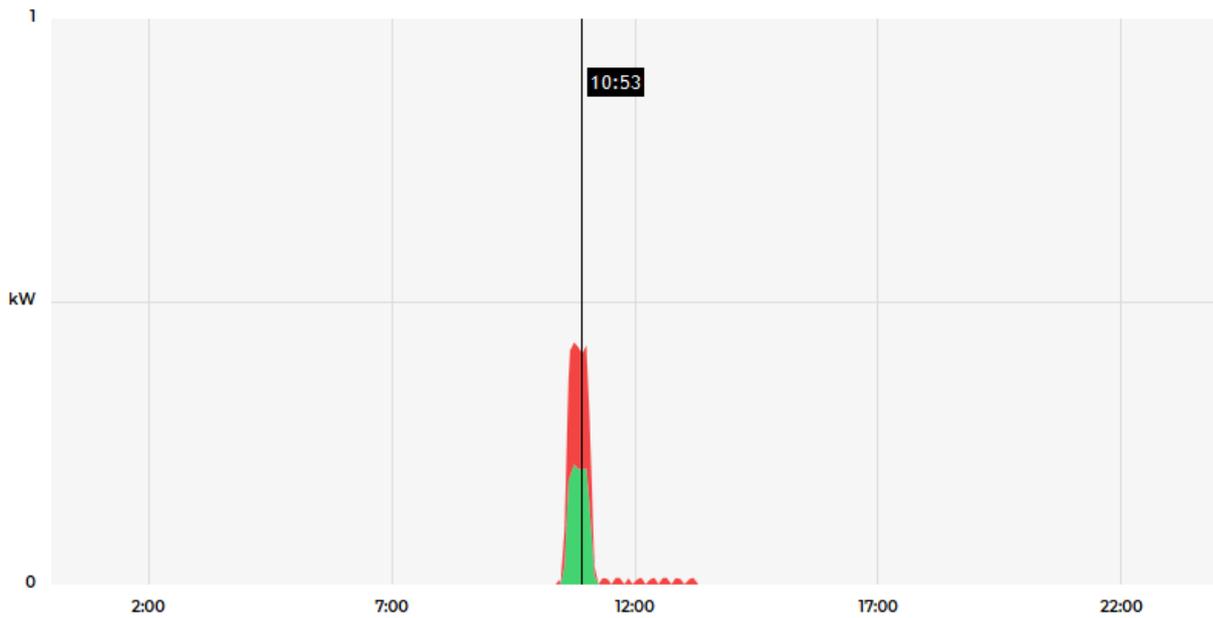

On bottom is time-plot for selected time period (in title row). By clicking on time plot a term for legend display is selected. Above there is power/energy legend.

User profile set-up

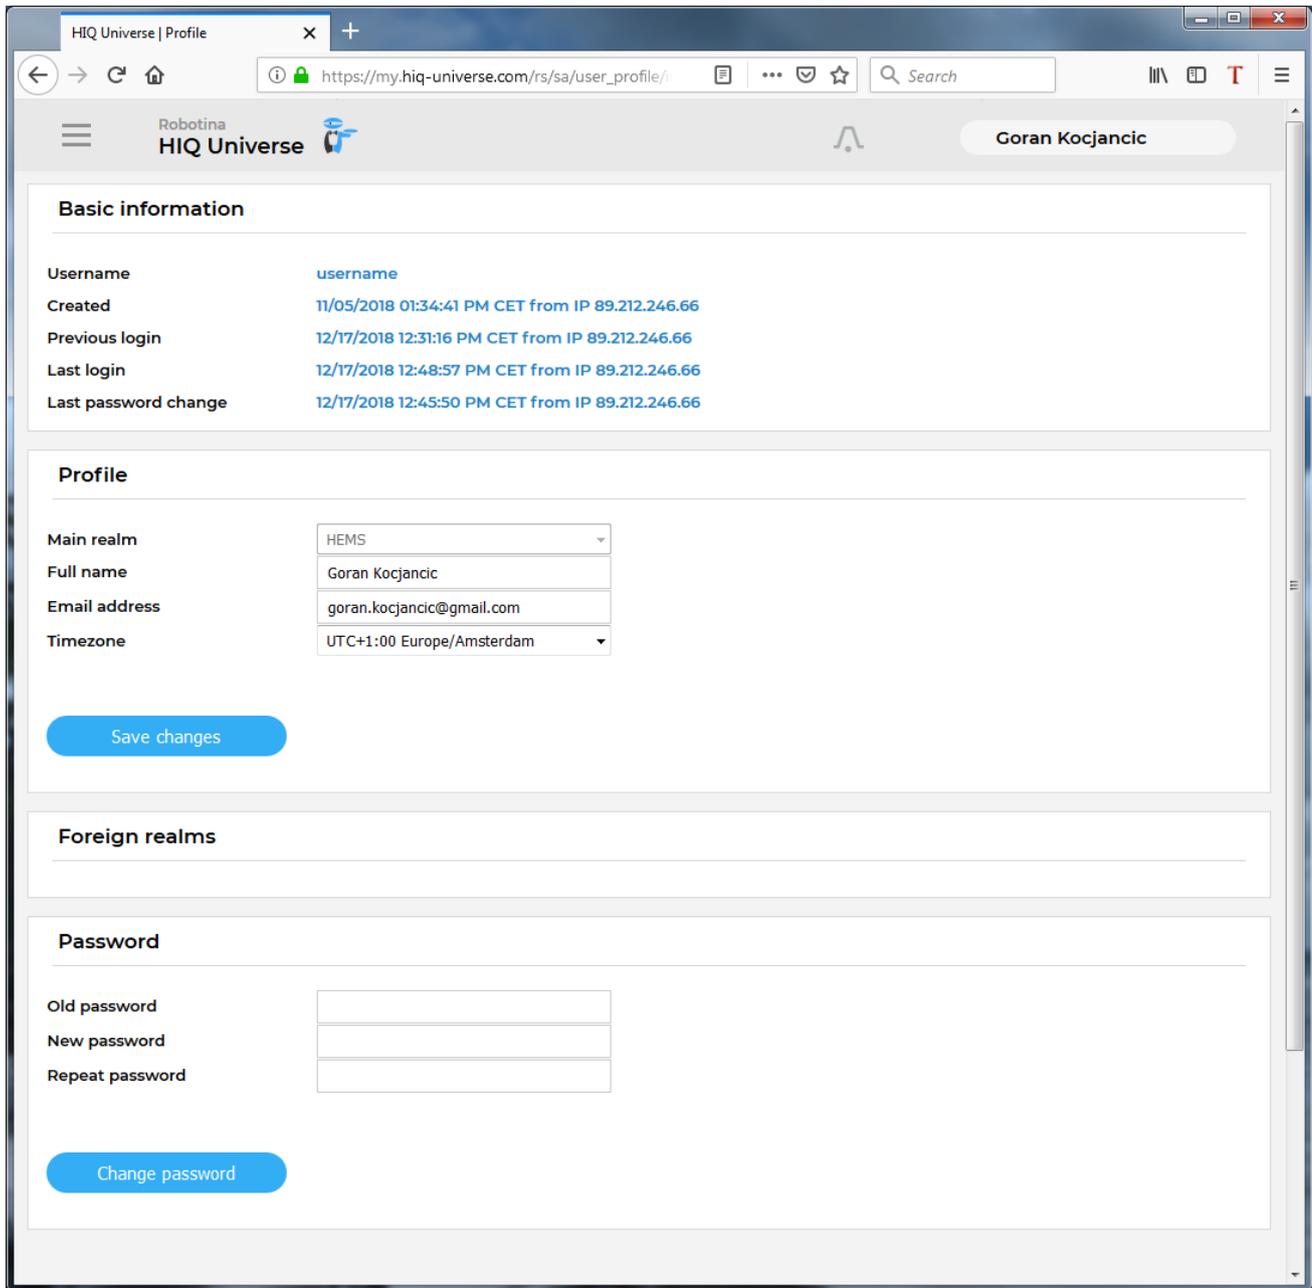

Basic information section:

- Username
- Created date and IP
- Previous and last login date and IP
- Last password change date and IP

Profile section:

- Main realm display
- Full name, email address and timezone edit fields

Foreign realms - devices and services where you have access to but you are not owner.

Password: fields for password changing.

HEMS settings

The screenshot shows a web browser window with the URL https://my.hiq-universe.com/rs/pp/918/iot_hems2_prc. The page header includes the HIQ Universe logo and the user name 'Goran Kocjancic'. The main content area is titled 'Settings' and is divided into several sections:

- Device name:** My HEMS
- Location:** Kozina
- Location name:** Kozina
- Location latitude:** (empty field)
- Location longitude:** (empty field)
- Energy price:**
 - Low tariff price (€/kWh): 0.100
 - High tariff price (€/kWh): 0.200
 - Feed-in tariff price (€/kWh): 0.100
- Timeplots range:**
 - Electricity:**
 - Max daily power (kW): 1
 - Max daily energy (kWh): 1
 - Max monthly energy (kWh): 20
 - Cost:**
 - Max daily value (€): 10
 - Max monthly value (€): 100
- Share your device:**
 - Owner: goran.kocjancic@gmail.com
 - Guest account: (empty field)
 - Buttons: 'Guest email address' and 'Remove quest'

A blue 'Save settings' button is located at the bottom of the settings section.

Sections:

- Settings:
 - Device name
 - Location name and coordinates
- Energy price: per tariff energy price
- Timeplots range: ranges for various timeplots
- Share your device: manage device sharing guest accounts

From: <http://wiki.hiq-universe.com/> -

Permanent link: http://wiki.hiq-universe.com/doku.php?id=en:goflex_hems:universe&rev=1548838039

Last update: 2019/01/30 08:47



