
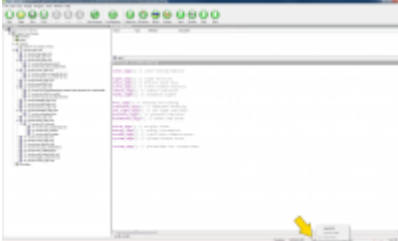
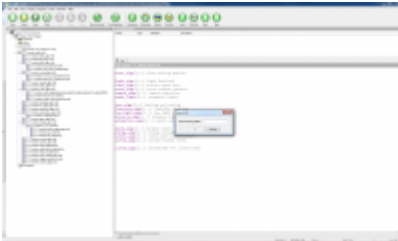

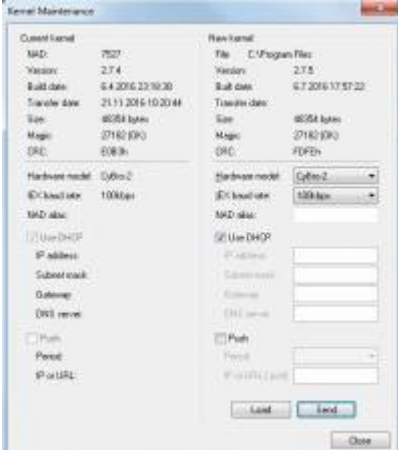
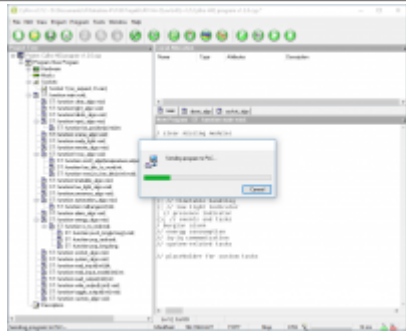
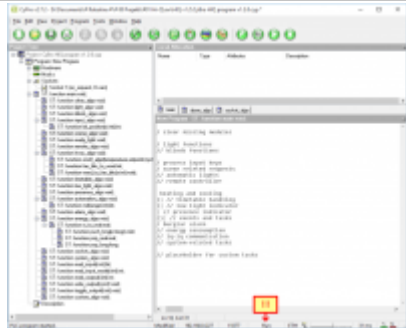



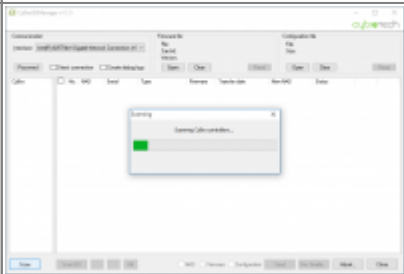


Firmware


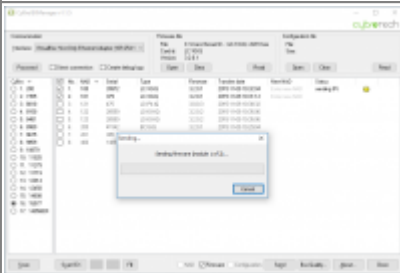
HC-IQ FW update

<p>Download and save CyPro IDE</p>	<p>CyPro or CyPro.zip (v2.8.0) or cypro-v3.0.7.exe (v3.0.7 - Cybro-3 / MC version)</p>	<p>Run and install it</p>
<p>Download and open project</p>	<p>hc-iq.cyp (v1.2.9a) or hc-iq-v1214.cyp (v1.2.14) or hc-iq-v603.cyp (v6.0.3 - Cybro-3 / MC version)</p>	
<p>Find Home Controller NAD (sticker on top of HC)</p>		
<p>Select Home Controller</p>	<p>right click on NAD</p>	
<p>Enter NAD</p>		
<p>If HC does not have the latest Kernel you have to send a new one.</p>	<p>Tools → Kernel maintenance...</p>	
<p>Send kernel to HC-IQ.</p>	<p>Select [Send] and then [Close]</p>	

Send Program	Program → Send [F9]			
Start PLC program	Program → Start PLC [F11]			

HIQ-DC FW update

Download and unzip CybroIEXManager		CyBrolexManager		
Download and unzip Device Controller FWs		firmware.zip		
Start CybroIEXManager.exe				
Scan for Home controller	[Scan]			
Select Home Controller (NAD number - sticker on top of HC)				
Scan for connected IEX Device Controllers	[Scan IEX]			

<p>For each connected device type open HIQ-DC FW.</p> <p>There can be several hardware versions. Hardware version is marked on the device or on the PCB board. Check firmware compatibility. Versions not listed there are not compatible and should not be used.</p>	<p>[Open]</p>	
<p>Send Firmware to HIQ-DC</p>	<p>[Send]</p>	

HIQ applications

Windows:


[HIQ Configurator](#).

(Some antivirus programs or company firewalls does not allow the downloading of *.exe files. You can download [file in .zip package](#) or you can disable the antivirus program.)

Apple:



Android:

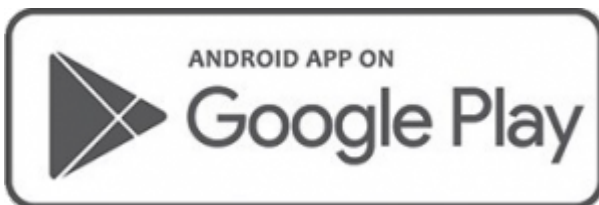

[hiq_manual.pdf](#)

From:
<https://wiki.hiq-universe.com/> -

Permanent link:
https://wiki.hiq-universe.com/doku.php?id=en:hiq_home:methods:commissioning:firmware&rev=1562753971

Last update: **2019/07/10 10:19**

