


Single phase power-sensor

1-phase power-sensor, current transformer

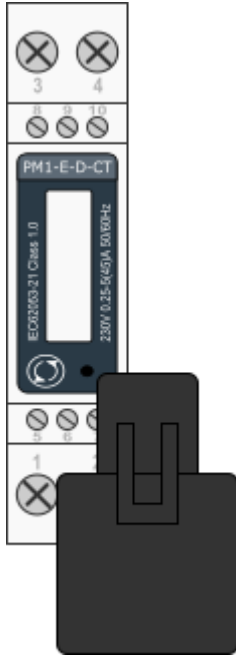

| | |
|---|--|
| Model number: | PM1-E-D-CT |
| Connect to: | MC-230 RS485 power sensor bus A - B |
| Mounting: | DIN rail, 1M, 18 mm |
| Dimensions: | 18 × 62 × 119 mm |
| Used for measuring power and energy of | |
| ✓ | single-phase energy sources |
| ✓ | single-phase energy consumers |

Applications

- Digital multi-function power sensor for single phase networks

Features

- DIN rail mounting with 50A current transformer
- Compact design in a single module 18mm wide
- Seal-able cover(phase and neutral terminals)

General description


The PM1-E-D series is an advanced single phase energy monitoring solution with built-in configuration push button and LCD data displaying, particularly indicated for active energy and other parameters metering and for cost allocation. Housing for DIN-rail mounting, IP51 protection degree.

Technical specifications

| Technical Data | |
|--------------------|-------|
| Operating Humidity | ≤ 75% |

| | |
|------------------------------|------------------------------|
| Storage Humidity | ≤ 95% |
| Operating Temperature | -20°C - +50°C |
| Storage Temperature | -30°C - +70°C |
| International Standard | IEC 62053-21 |
| Accuracy | Class 1 |
| Mounting | DIN rail (DIN 43880) |
| Sealing | IP51 Indoor |
| Nominal Voltage Input | (Ph+N) 230V AC (176-276V AC) |
| Max Continuous Voltage | 120% of nominal |
| AC Voltage Withstand | 4KV for 1 minute |
| Impulse Voltage Withstand | 6KV-1.2μS |
| Current Input | 0.25-5A(6)A AC RMS |
| Operational Current Range | 0.4% Ib-I _{max} |
| Over current withstand | 20I _{max} for 0.01s |
| Nominal Input Current Burden | 0.5VA |
| Frequency | 50Hz(±10%) |
| Power Consumption | ≤ 2W/10VA/phase |
| Accuracy | |
| Voltage, Current | 0.5% |
| Frequency | 0.2% of Mid-Frequency |
| Power Factor | 1% of Unity (0.01) |
| Active Power, Apparent Power | ≤ 1% of Range Maximum |
| Reactive Power | ≤ 1% of Range Maximum |
| Reactive Energy (Varh) | Class 2 |
| Active Energy (Wh) | Class 1 |
| Modbus | |
| Bus Type | RS485 (Semi-Duplex) |
| Protocol | Modbus RTU |
| Baud Rate | 1200/2400/4800/9600bps |
| Address Range | 1-247 |
| Max. Bus Loading | 64pcs |
| Communication Distance | 1000 Meters |
| Parity | EVEN/ODD/NONE |
| Data Bit | 8 |
| Stop Bit | 1 |

SDM120 Terminals

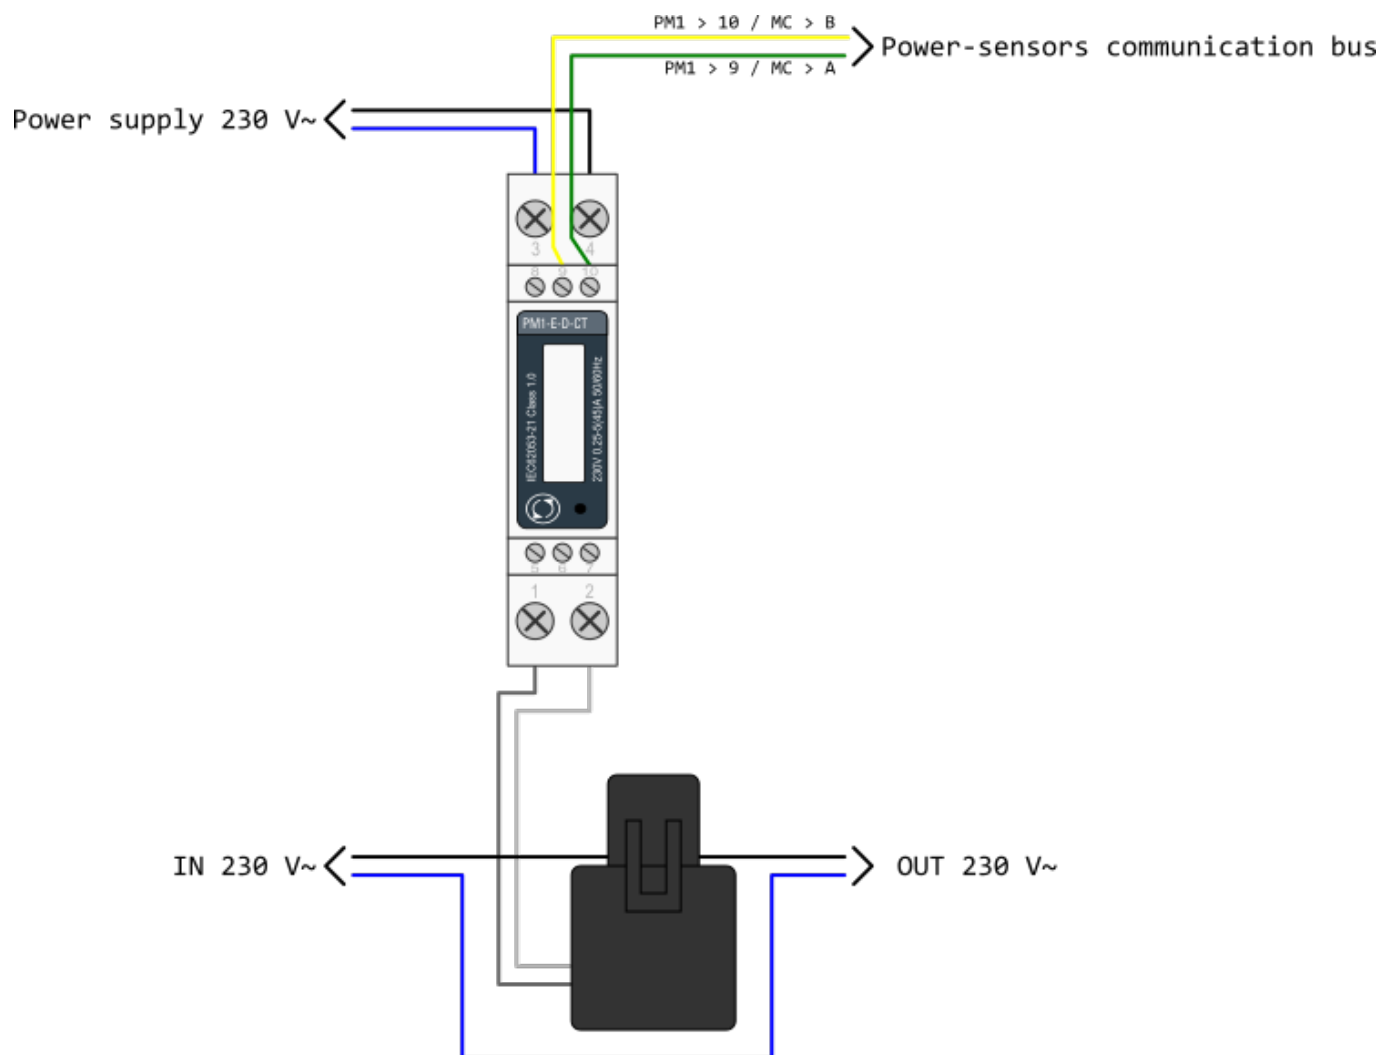

sdm120ct_series_datasheet.pdf
sdm120ct_protocol.pdf

From:
<https://wiki.hiq-universe.com/> -

Permanent link:
https://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:pm1-e-d-ct&rev=1566206945

Last update: **2019/08/19 09:29**

