


HEMS v1.2.0 wiring

MC-230


Wiring of default configuration.

NOTE: several different configurations can be configured with [HEMS Configurator](#).

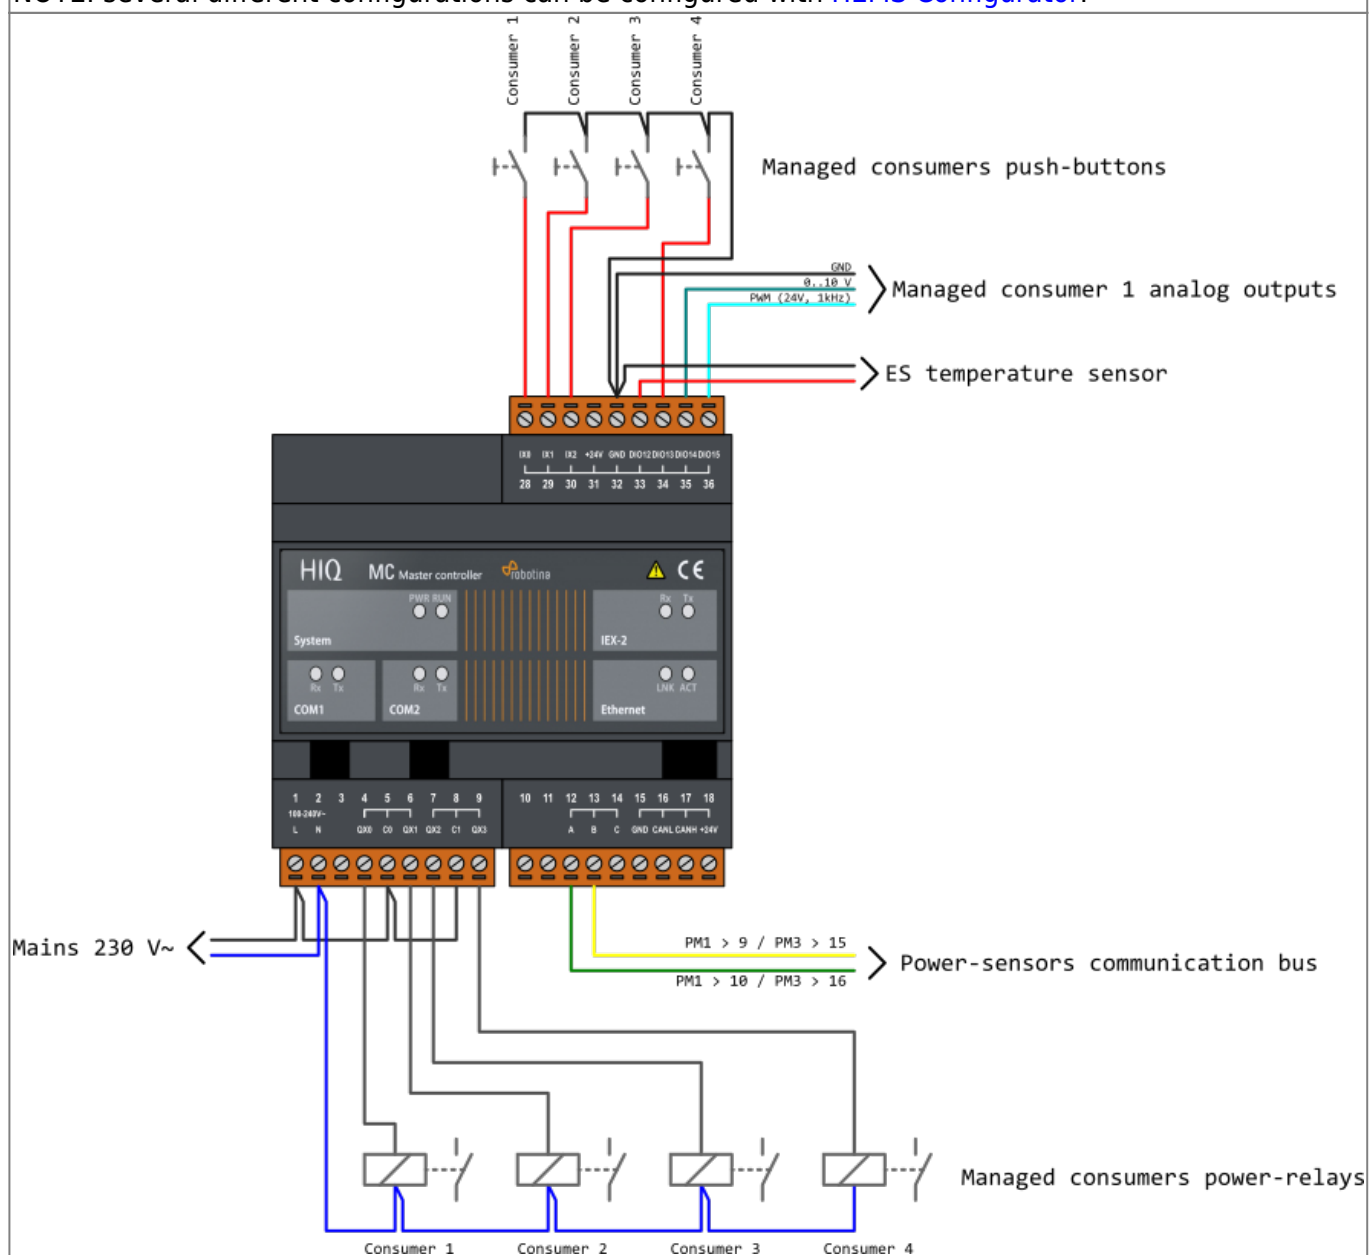


Network → MC-230, IOT-L2-2 and optionally 4G modem

Default connection to the LAN:

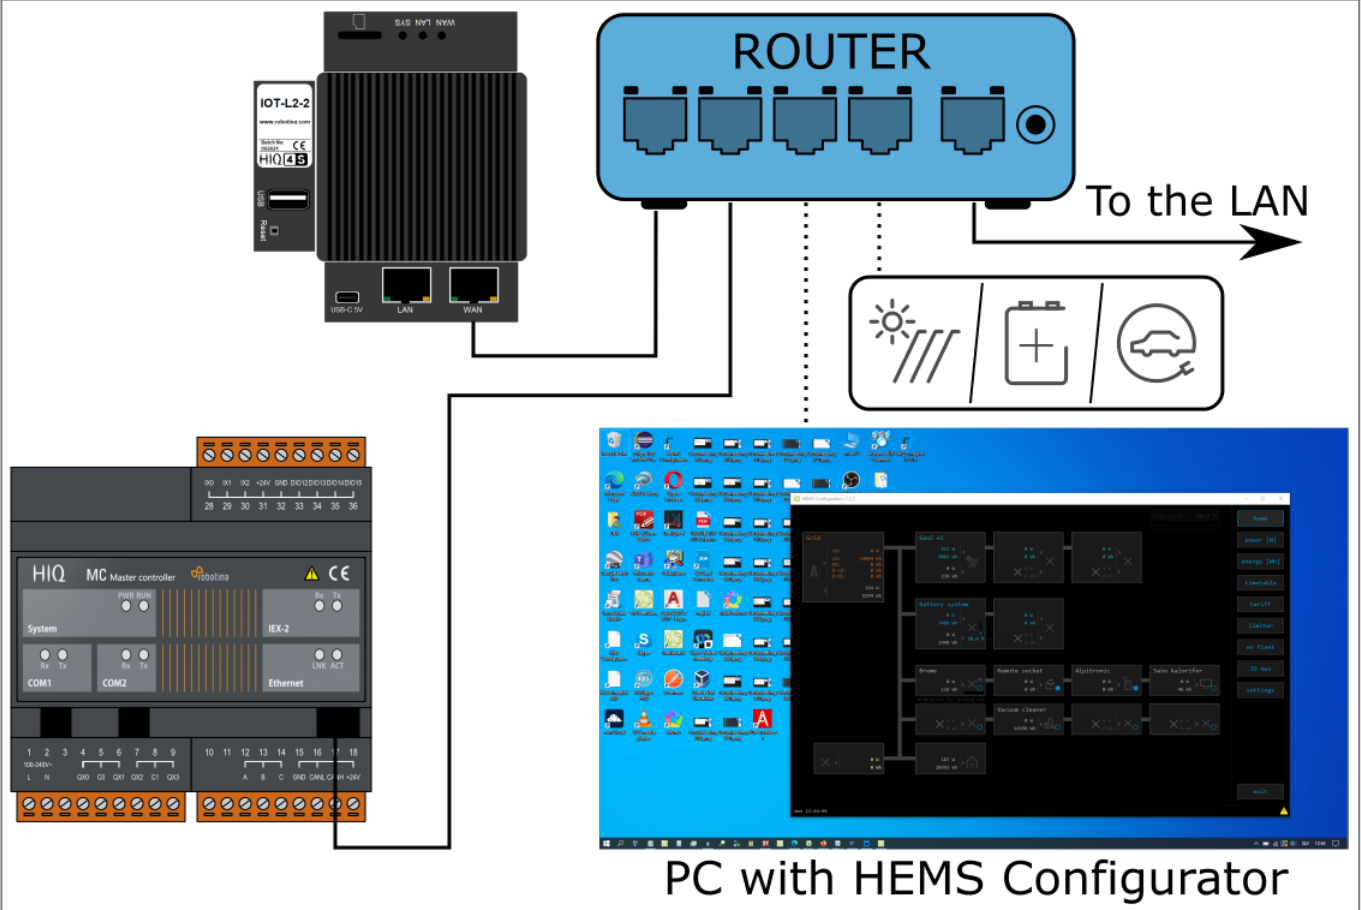


Default connection via 4G modem:

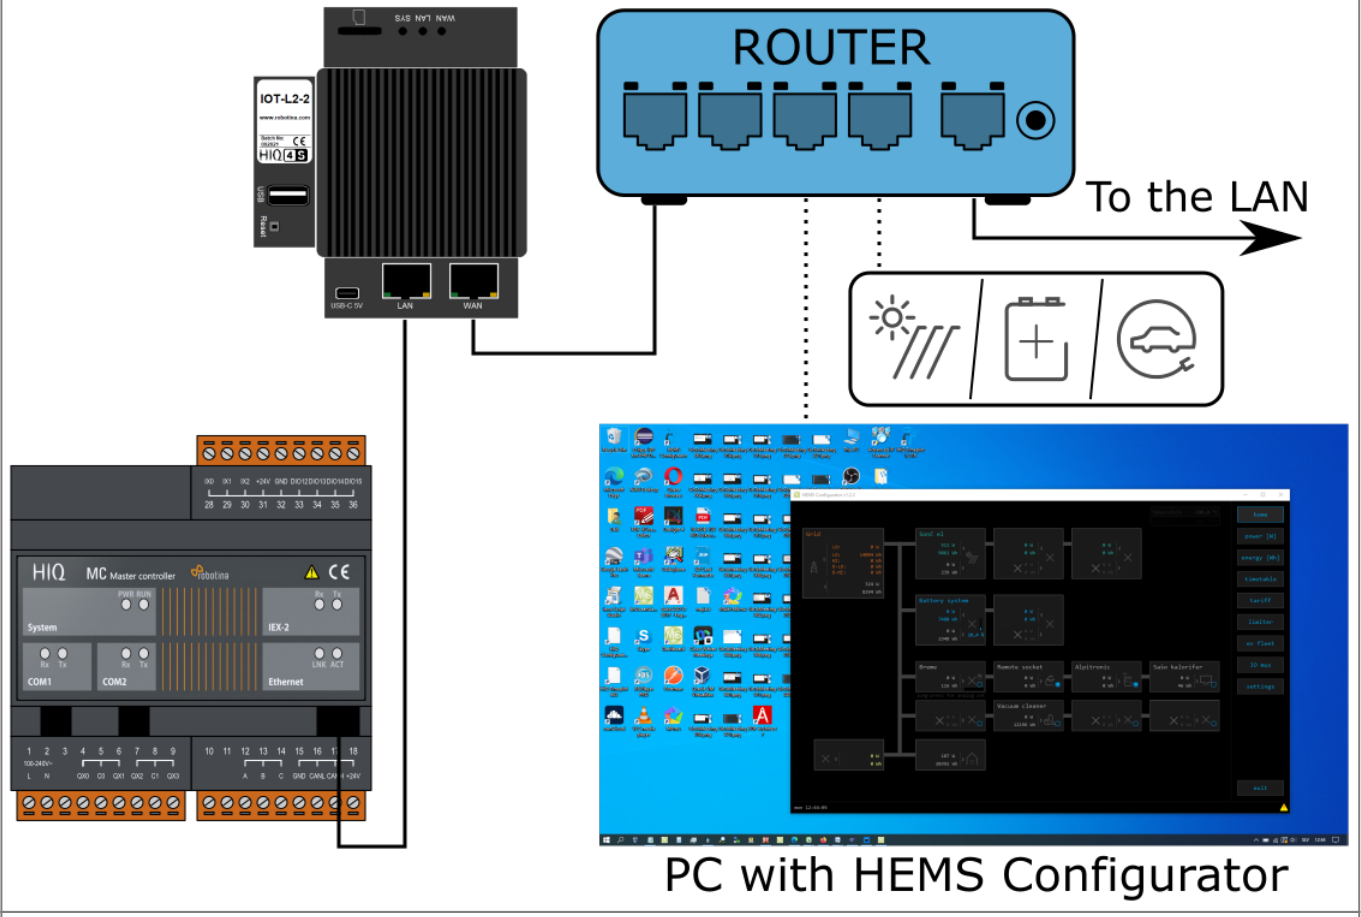


Optional connection to the LAN:


NOTE: optional connection has to be configured on the cloud service. Please contact [support](#). The same applies to specific network requirements, i.e. static IP address.

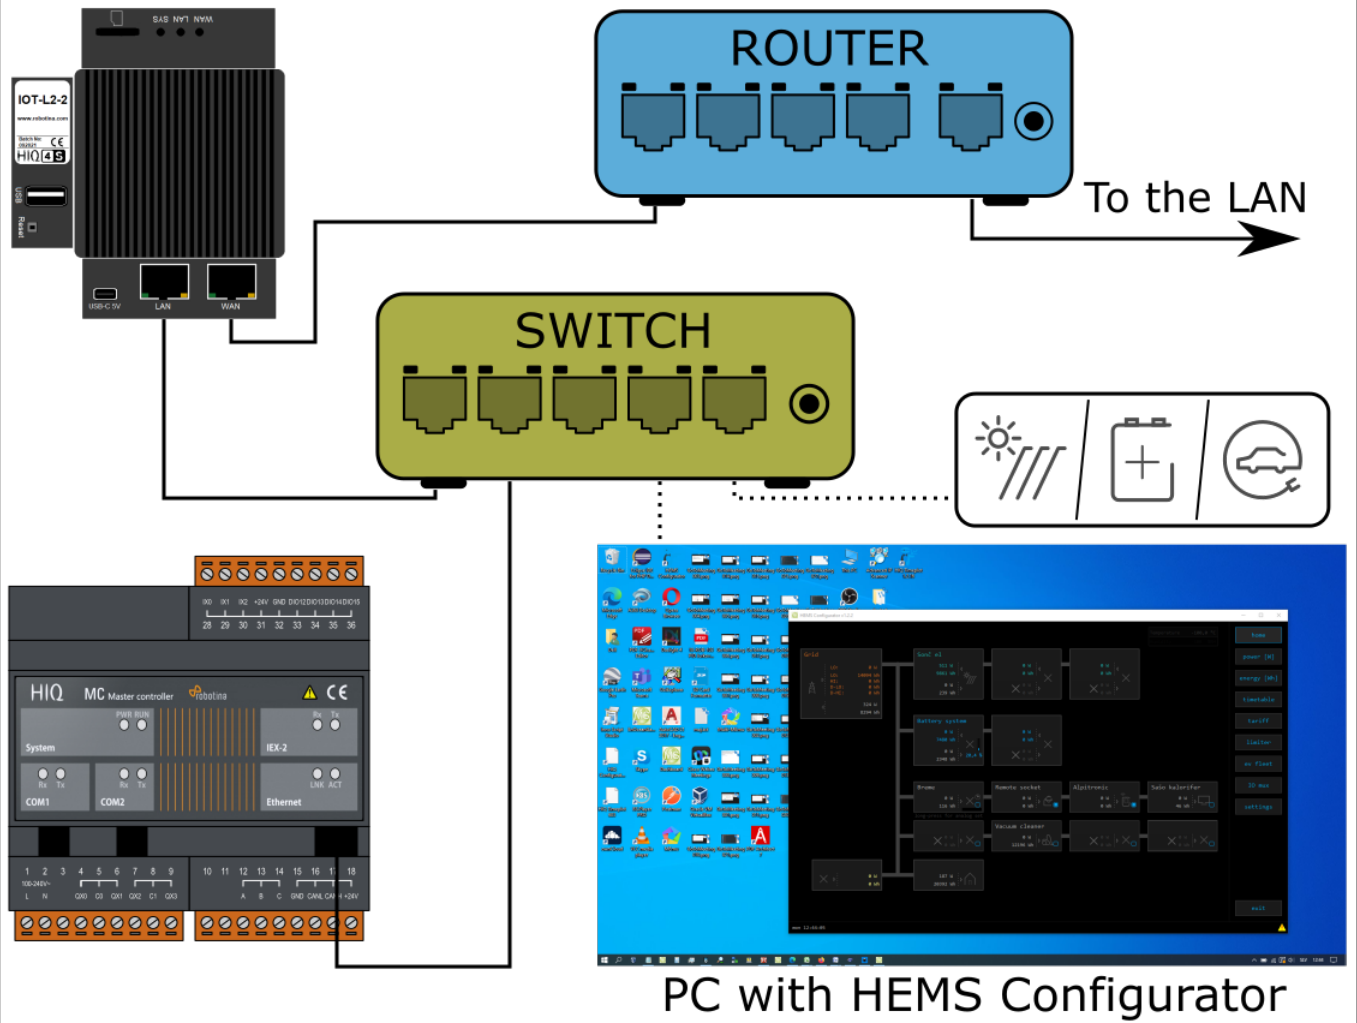


PM3-I-D

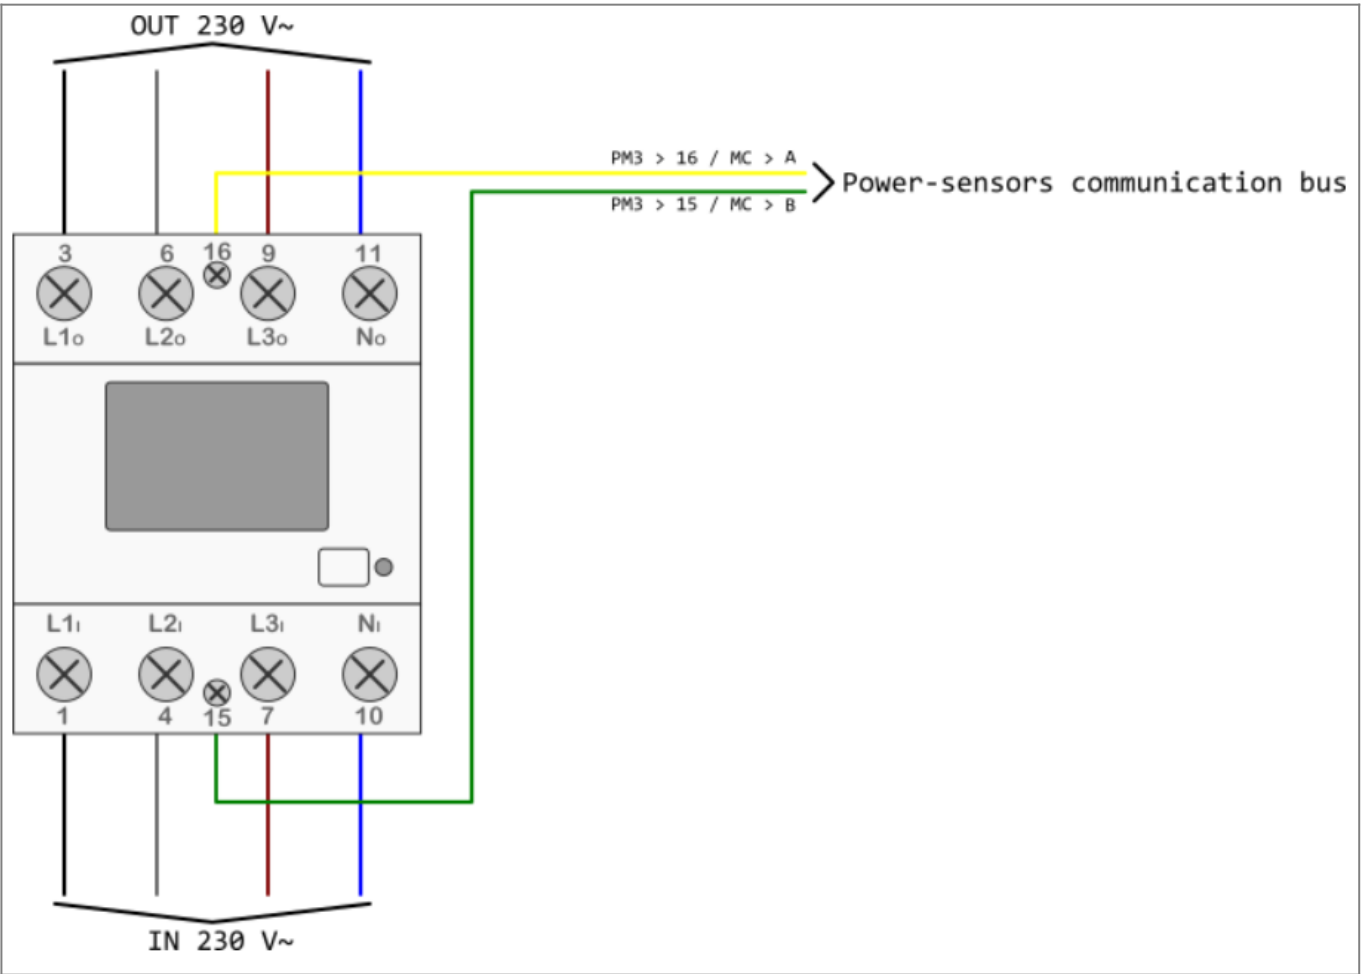


PM1-E-D

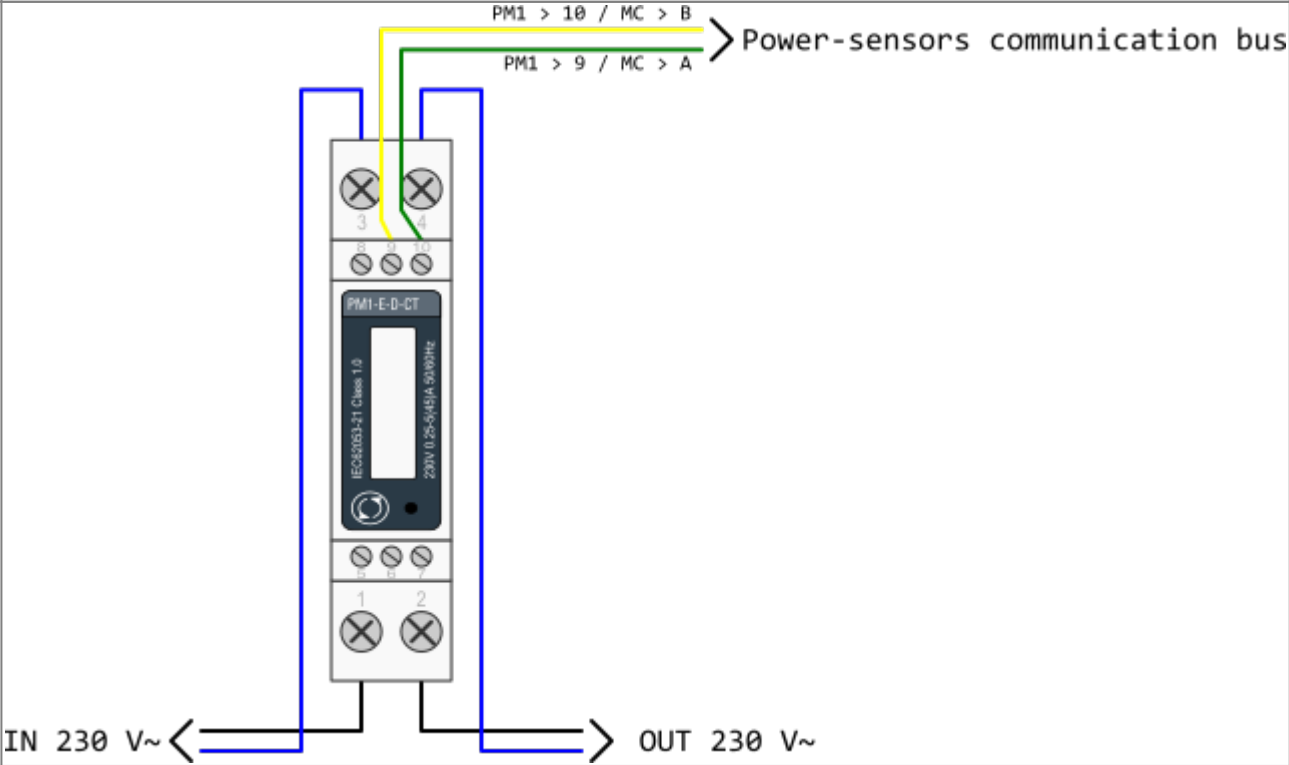


PM1-E-D-CT

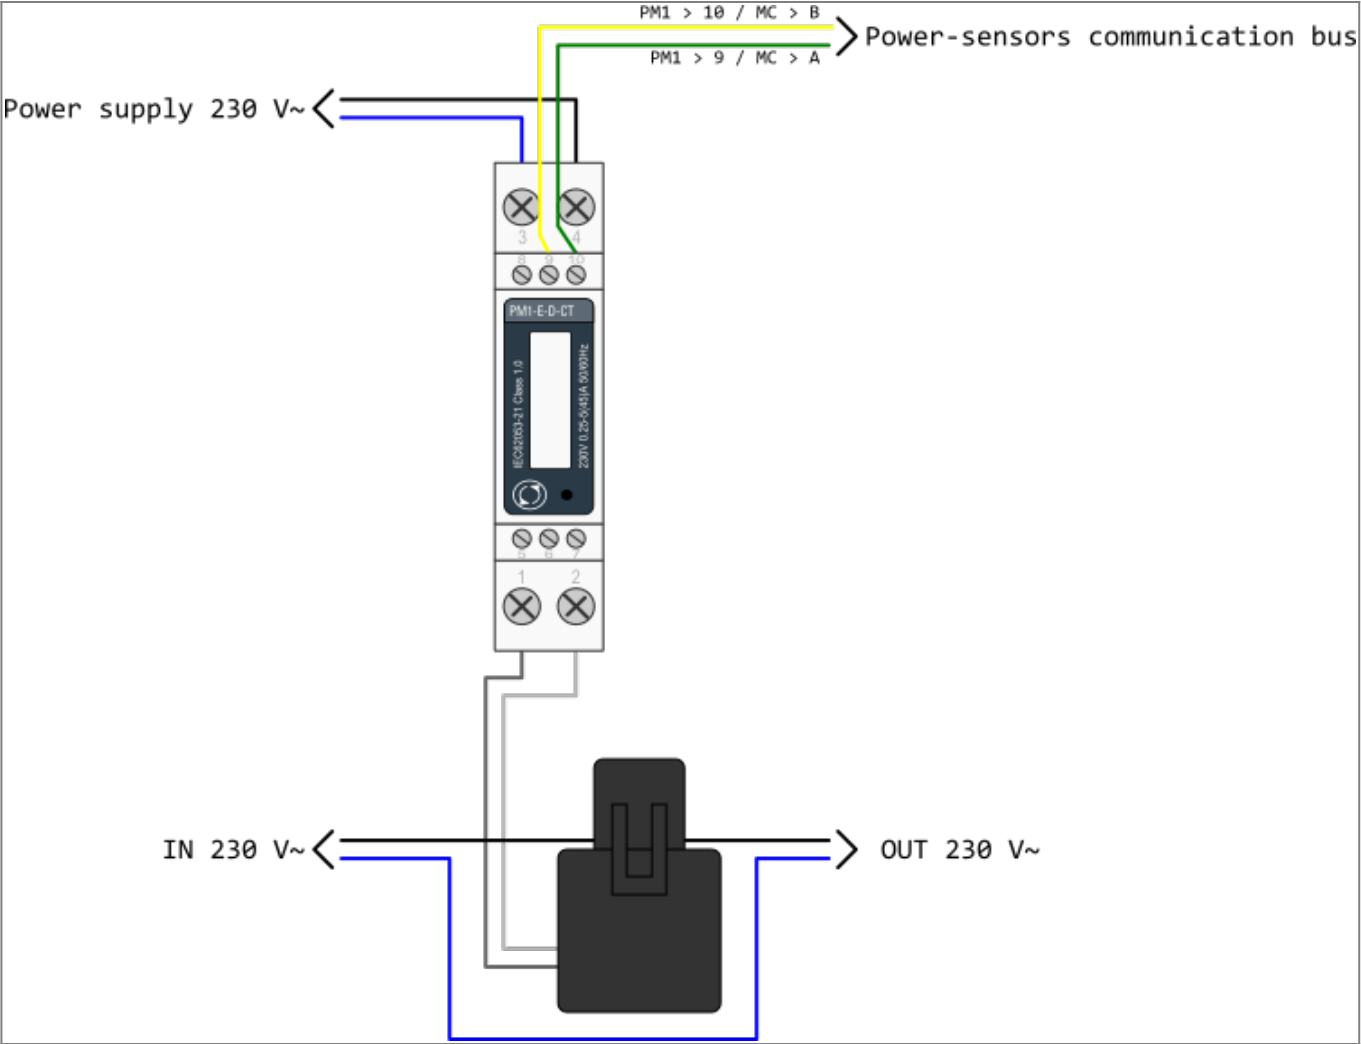

PM3-E-D-CT

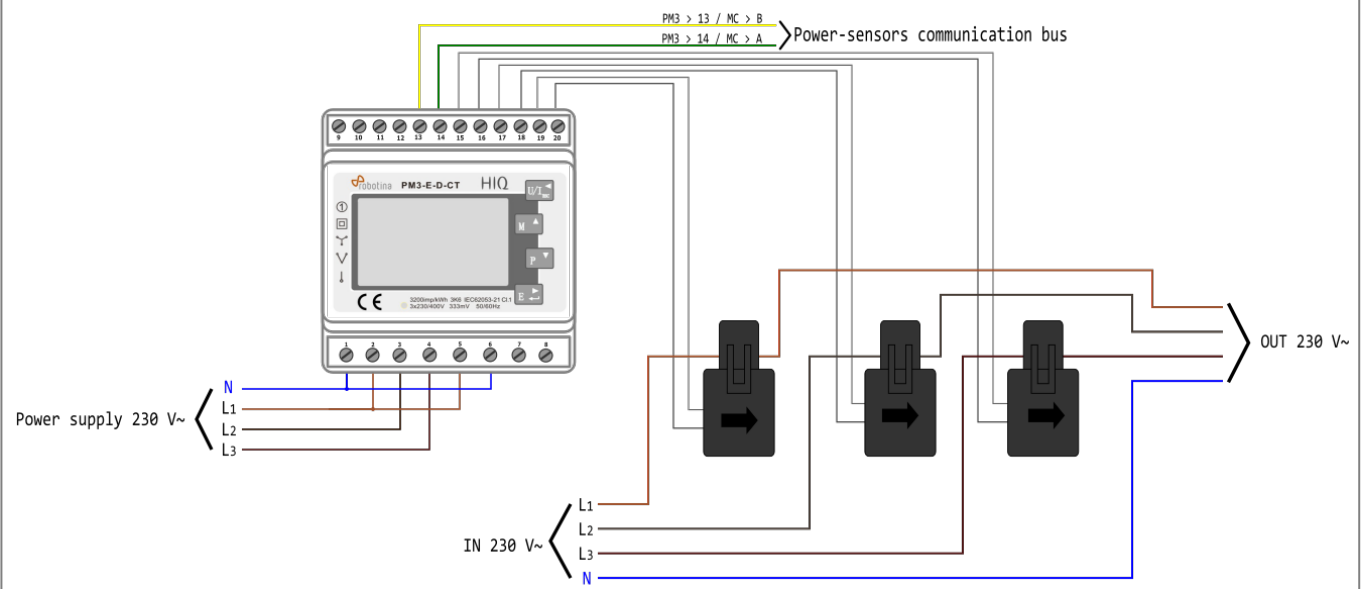

Power-sensors orientation

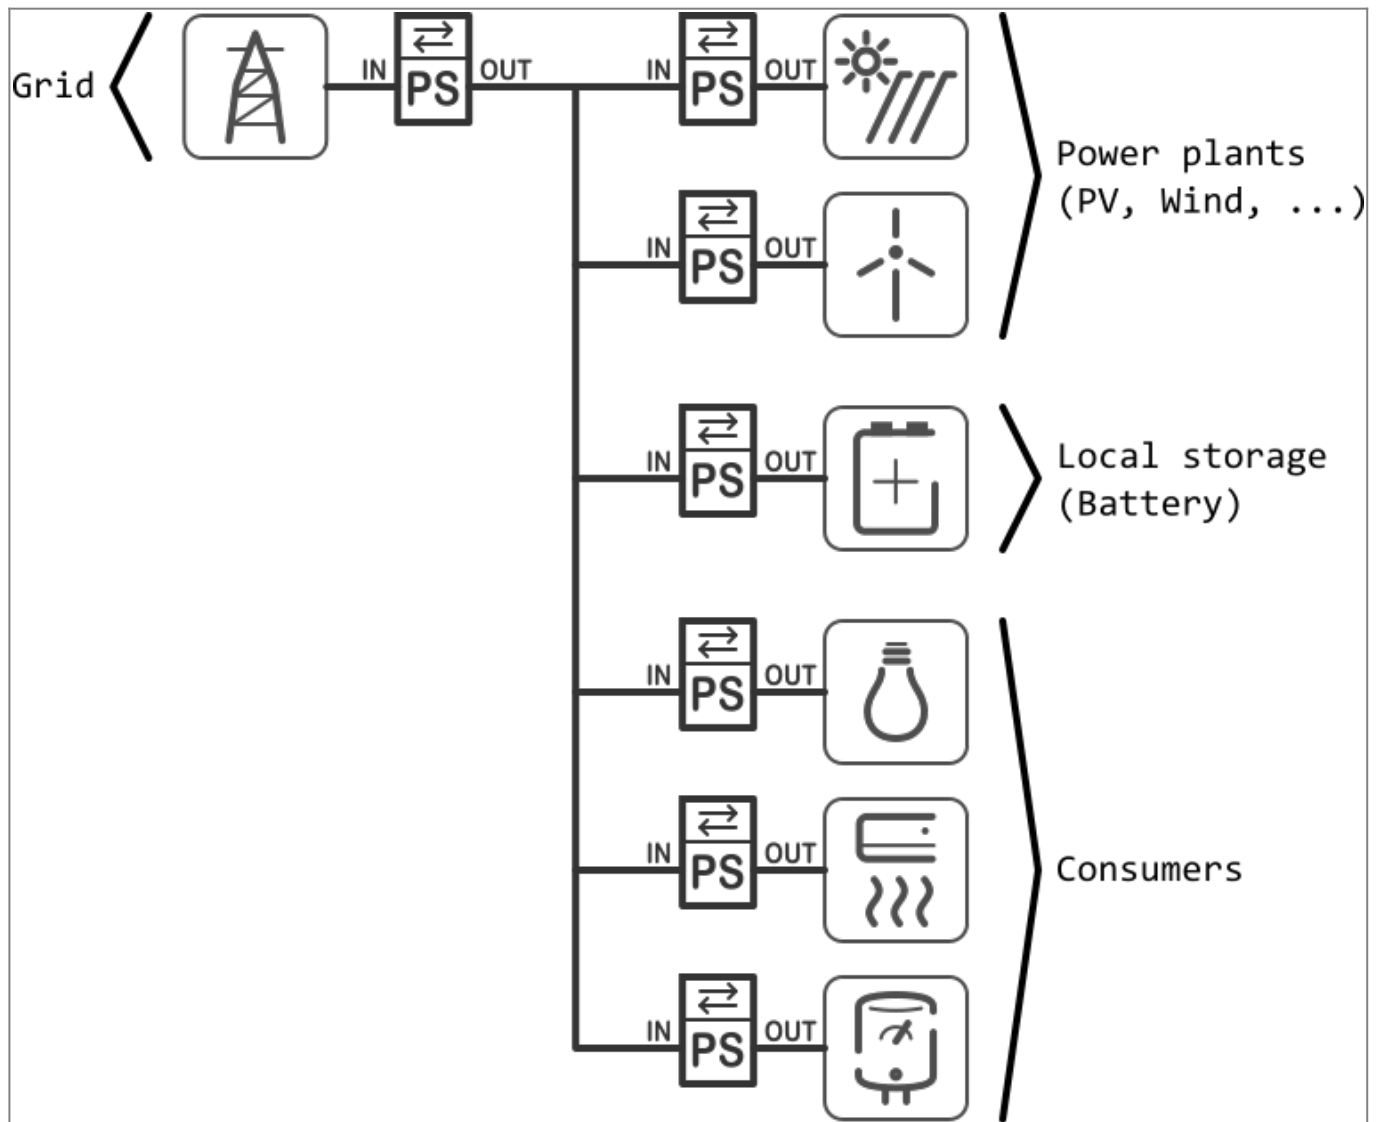

From:
<https://wiki.hiq-universe.com/> -

Permanent link:
https://wiki.hiq-universe.com/doku.php?id=en:hems_v1_2_0:methods_resources:wiring&rev=1632150594

Last update: **2021/09/20 15:09**

