


HEMS v1.2.0 wiring


MC-230

Wiring of default configuration.

NOTE: several different configurations can be configured with [HEMS Configurator](#).

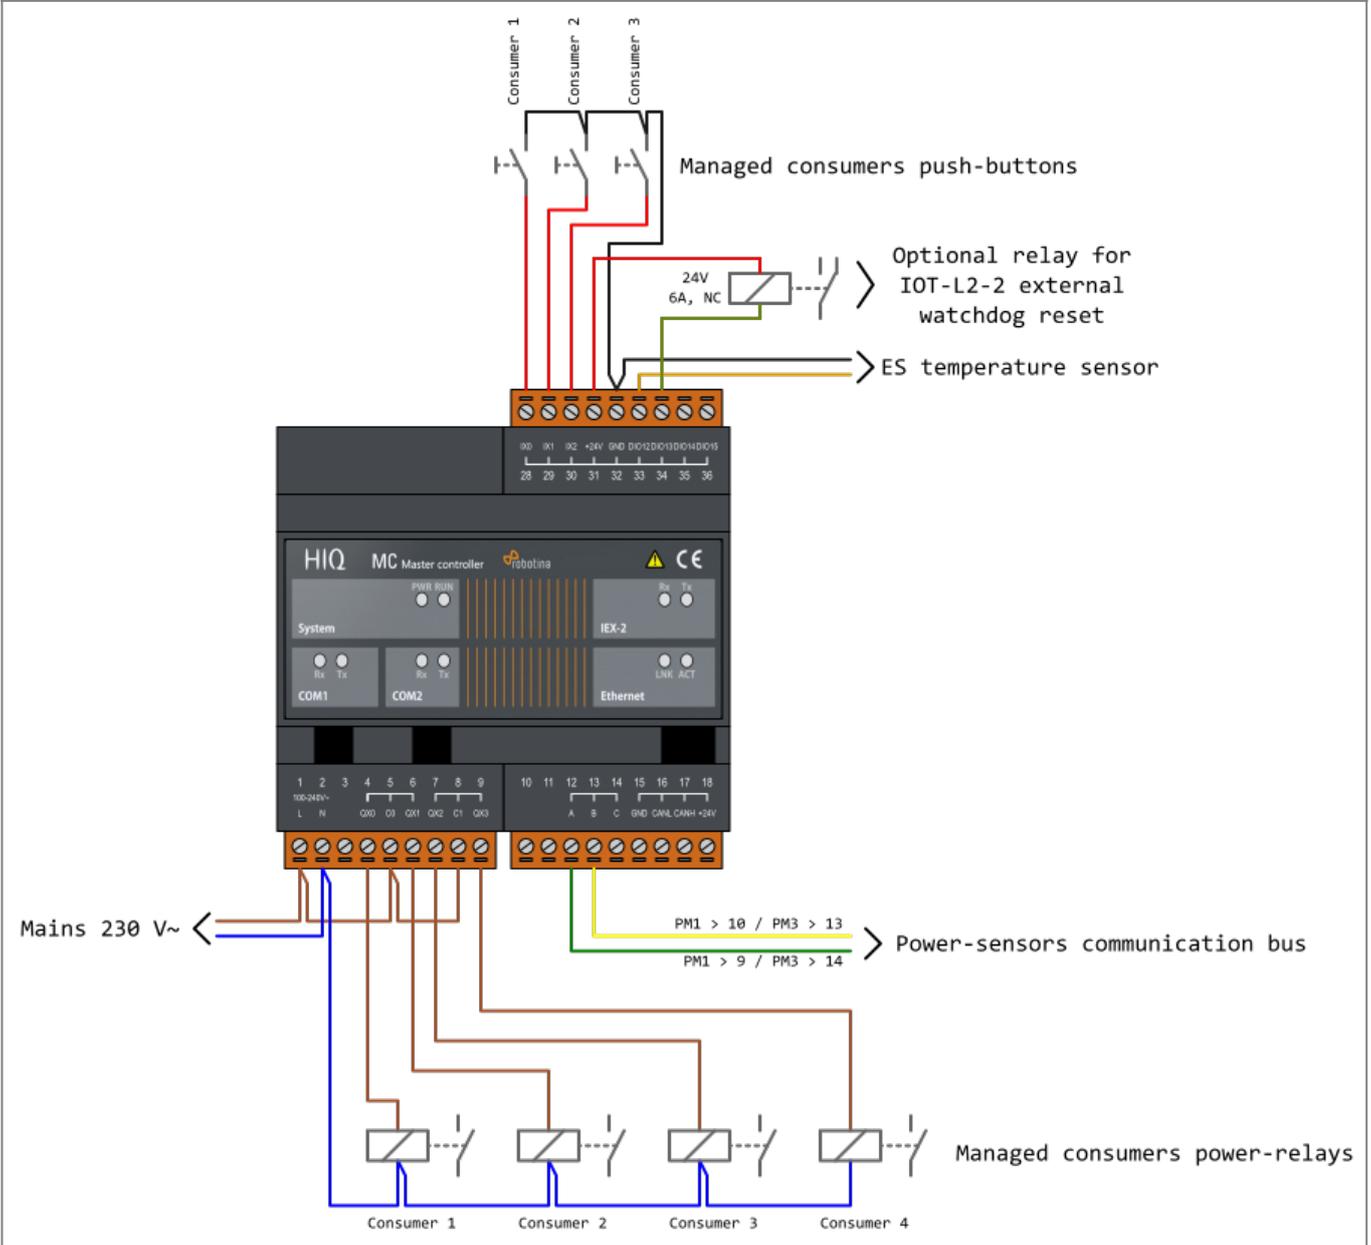


IOT-L2-2

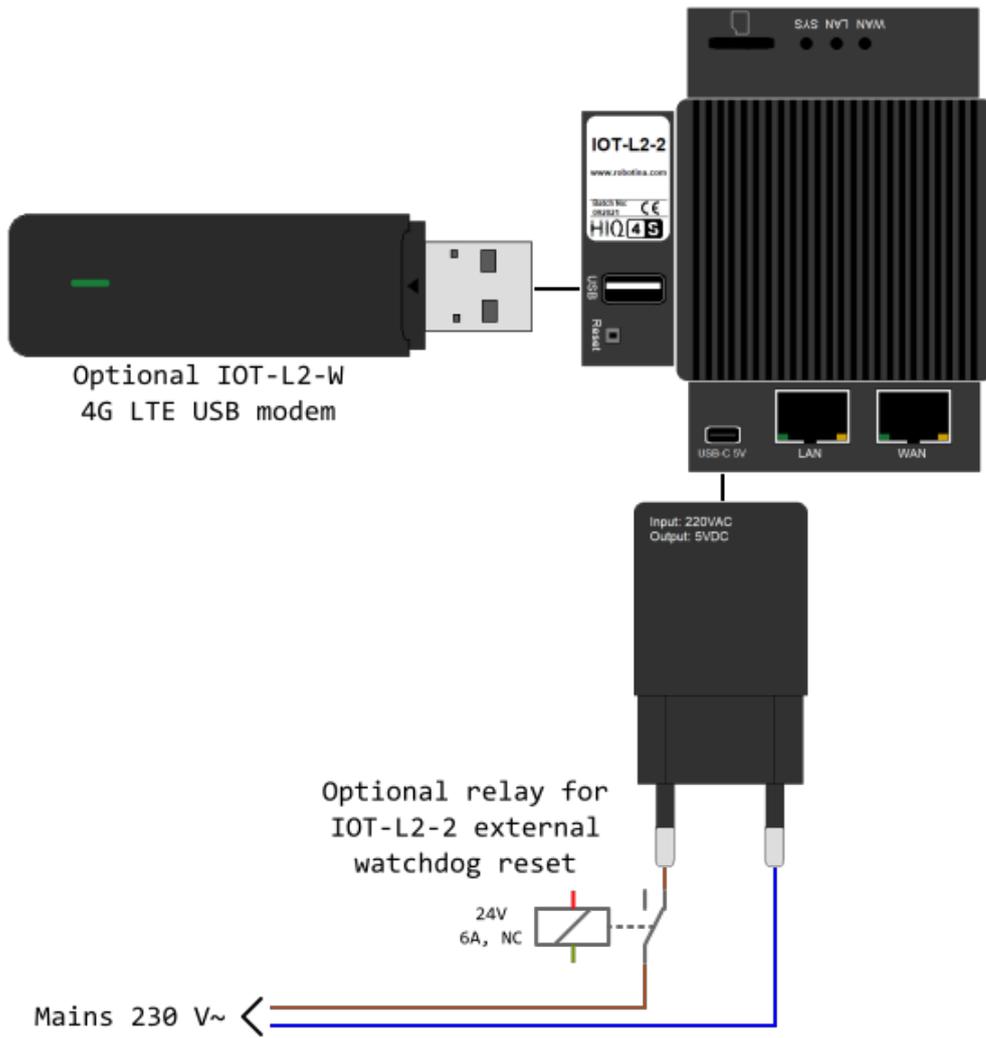


Network → MC-230, IOT-L2-2 and optionally 4G LTE modem


Default connection to the LAN:

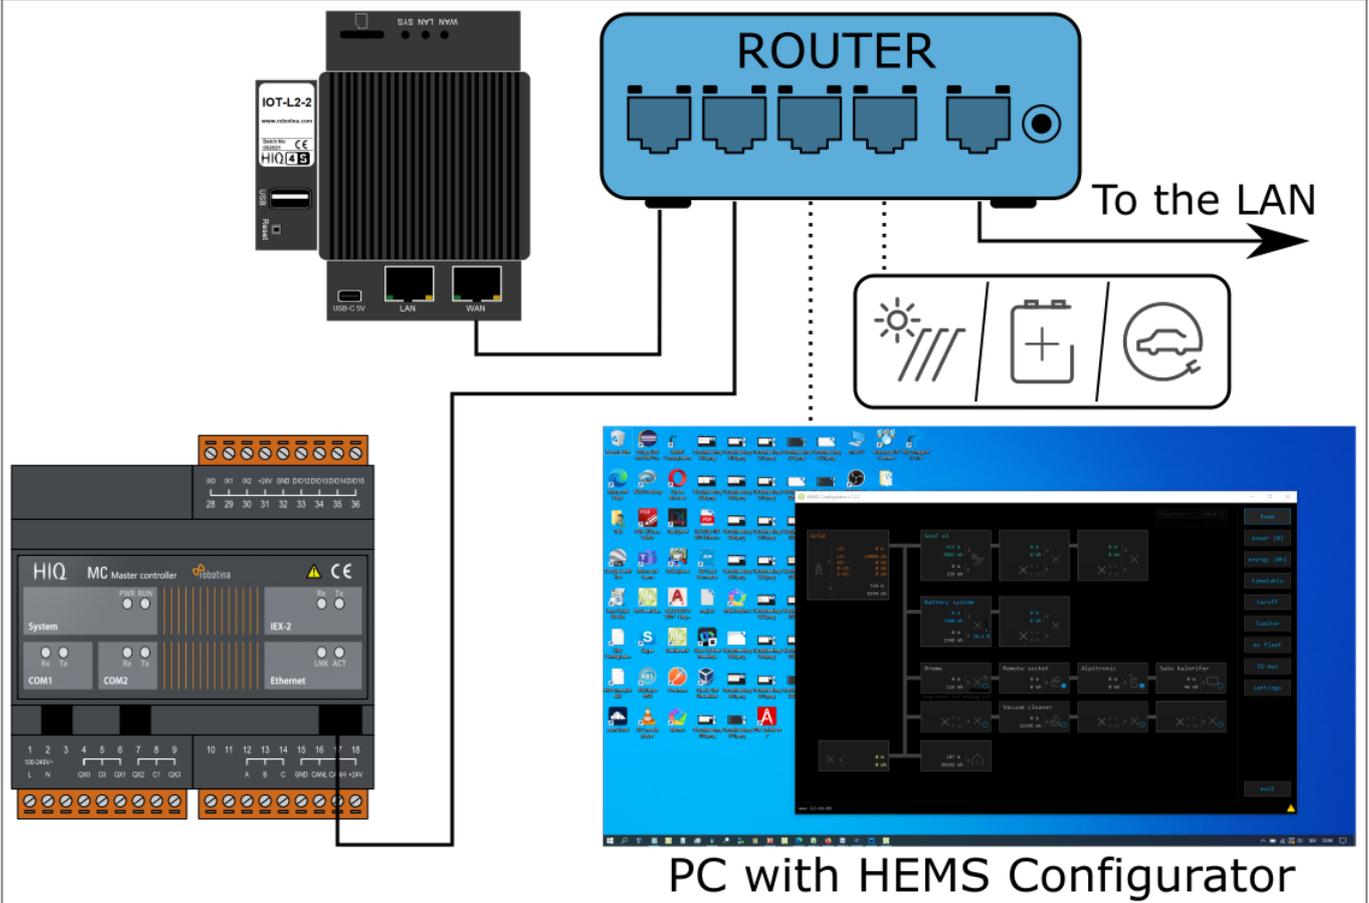


Default connection via 4G LTE modem:

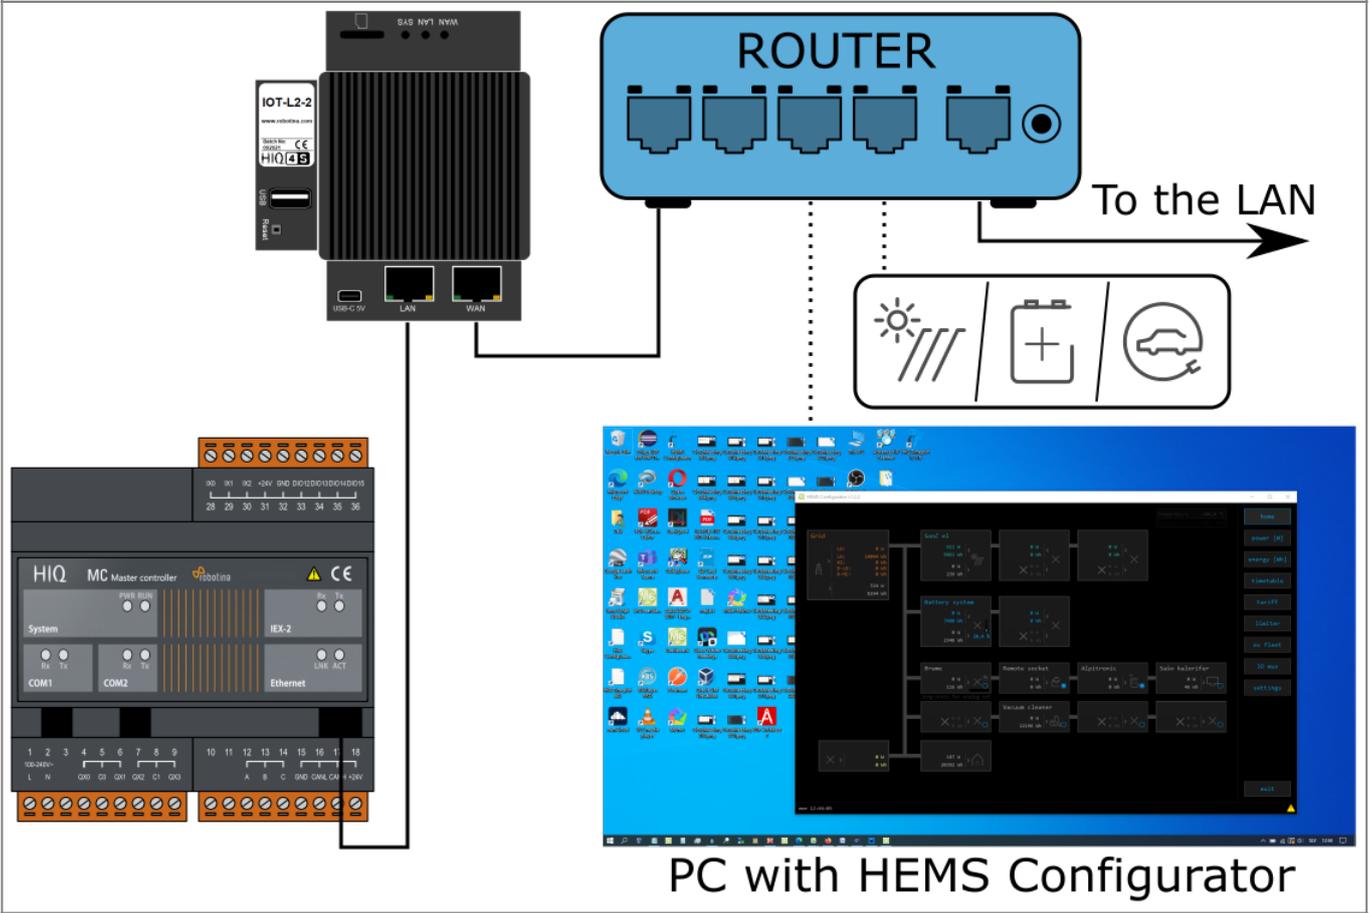


PM3-I-D

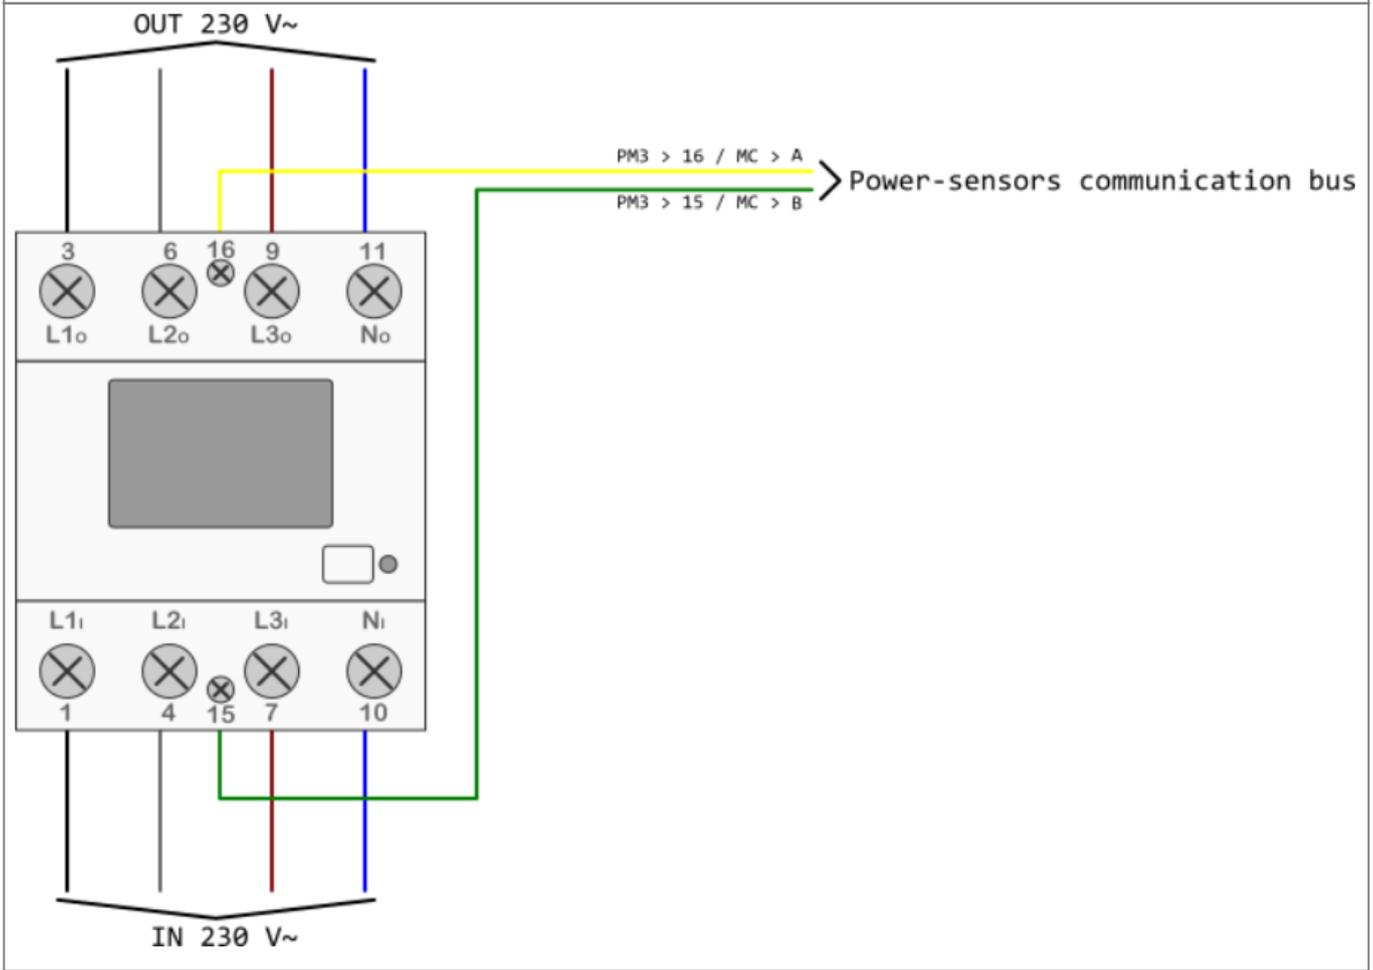


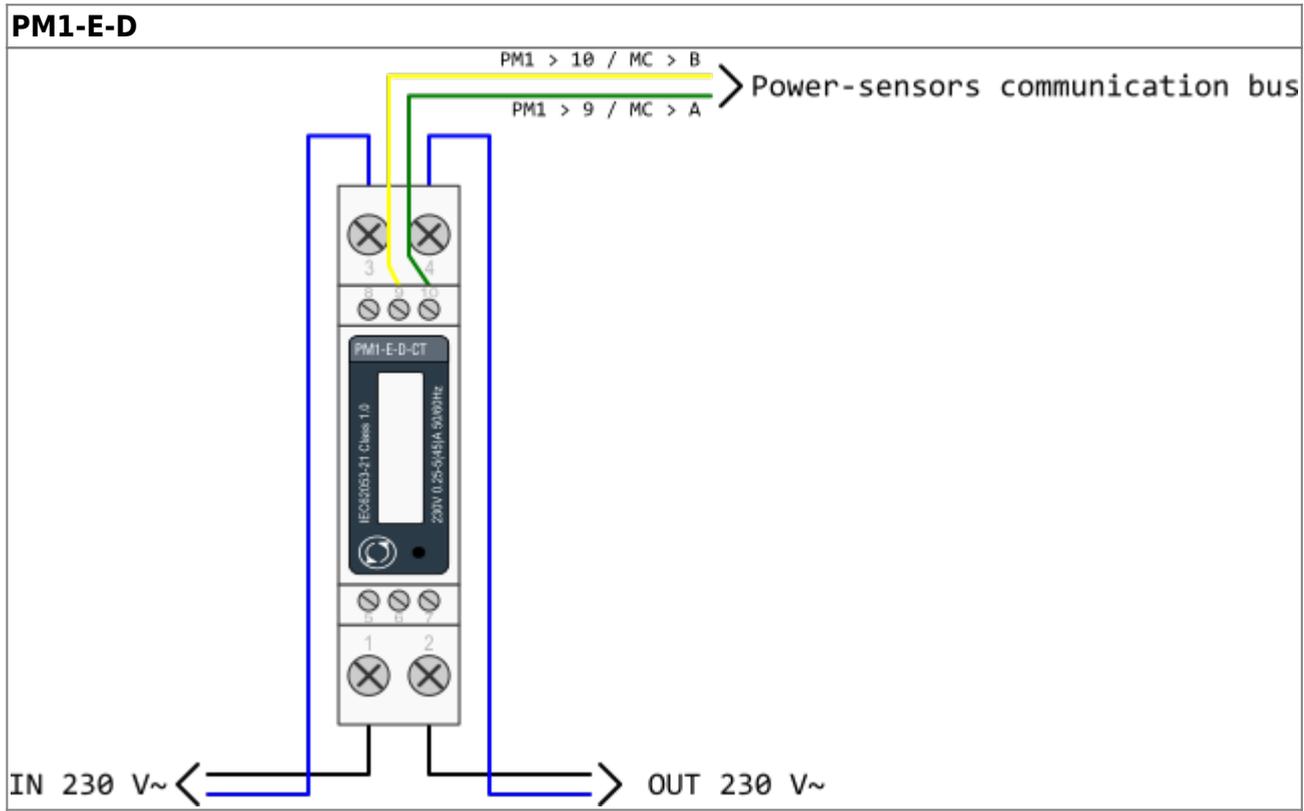


PM1-E-D-CT

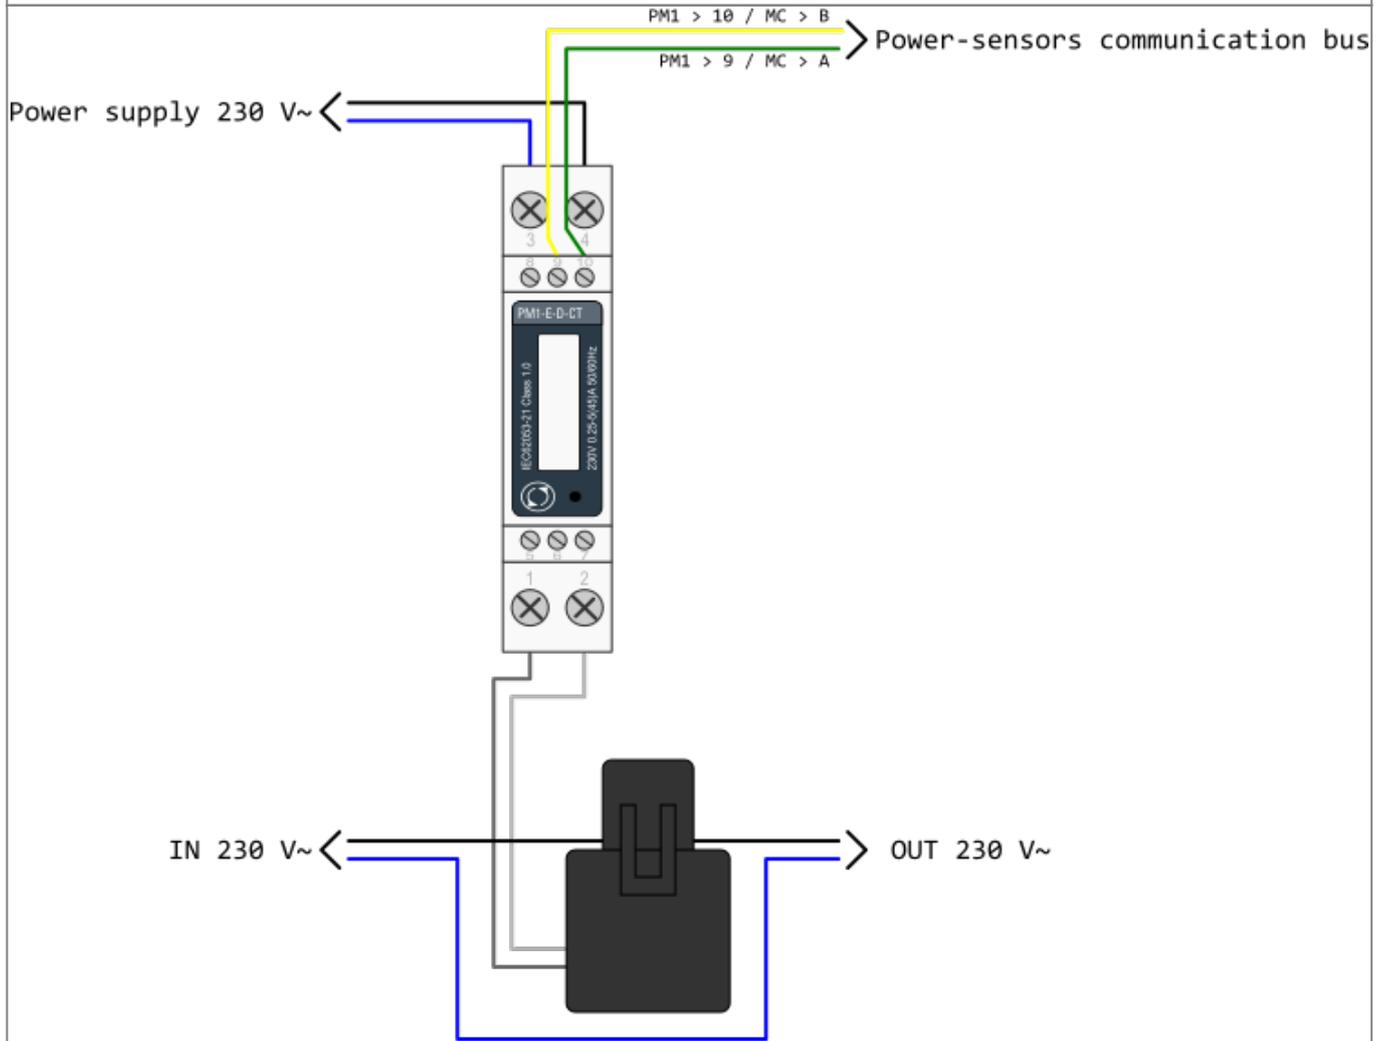


PM3-E-D-CT

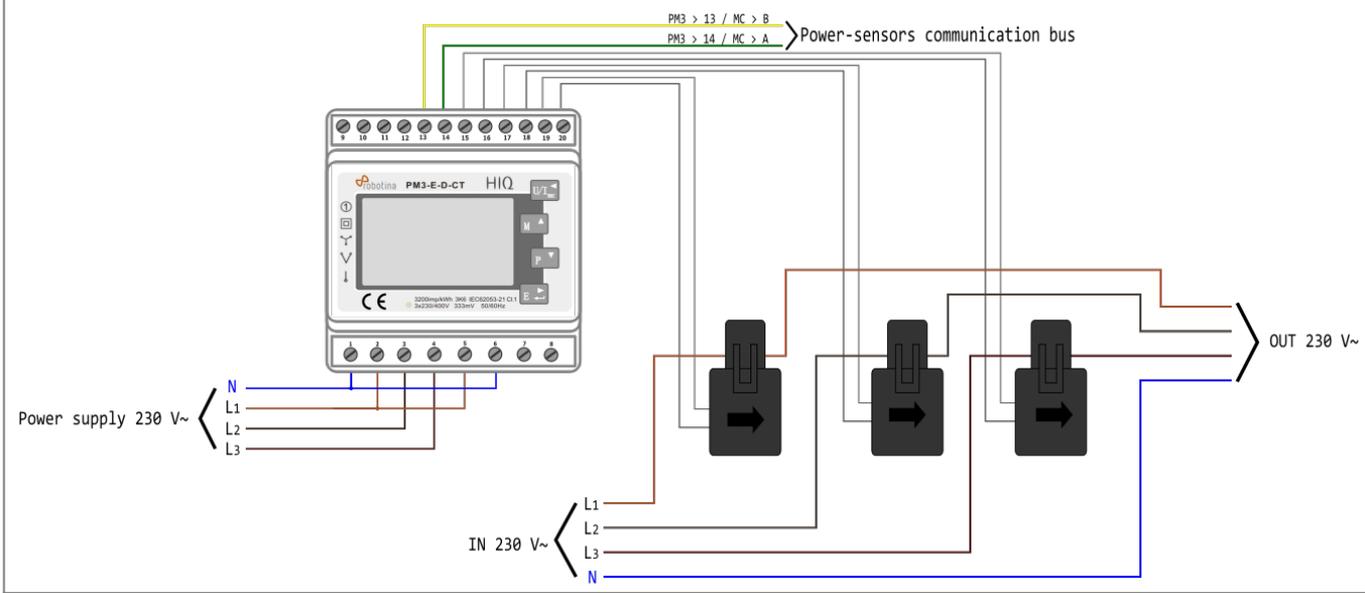


WM-1

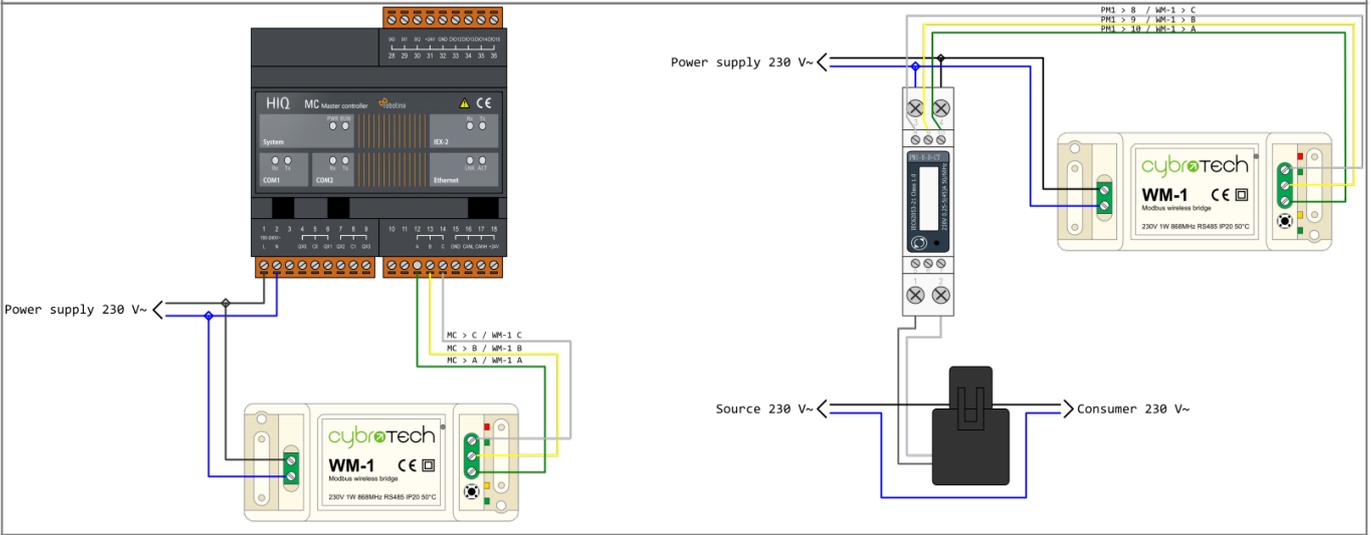

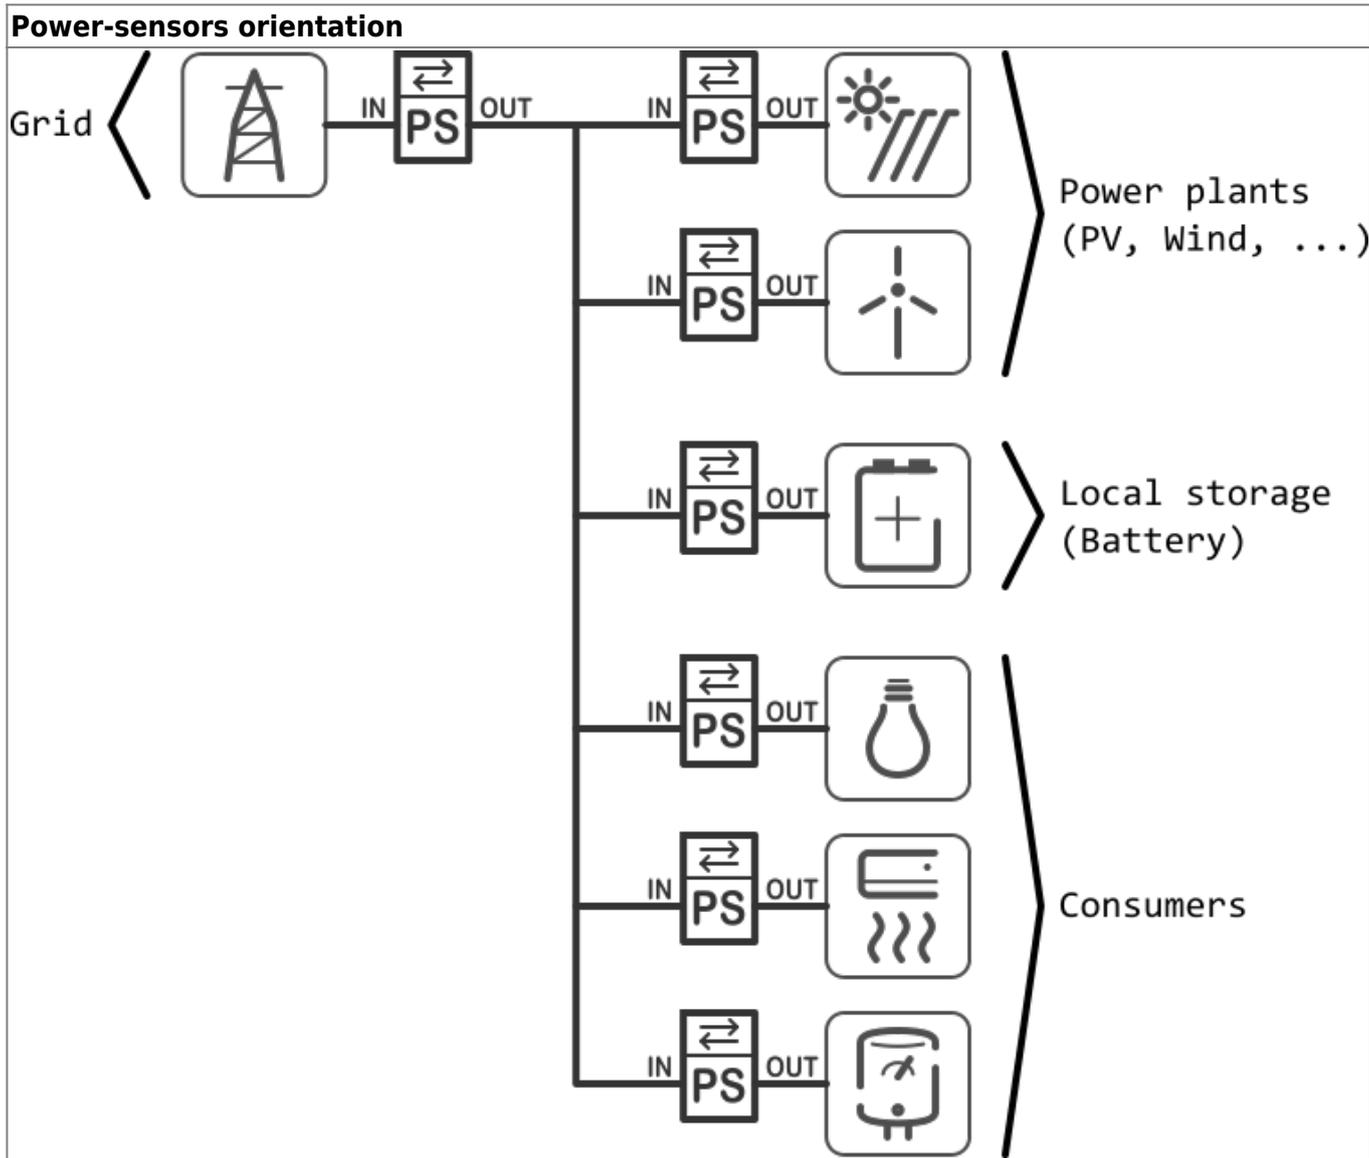

Control consumer by external signal

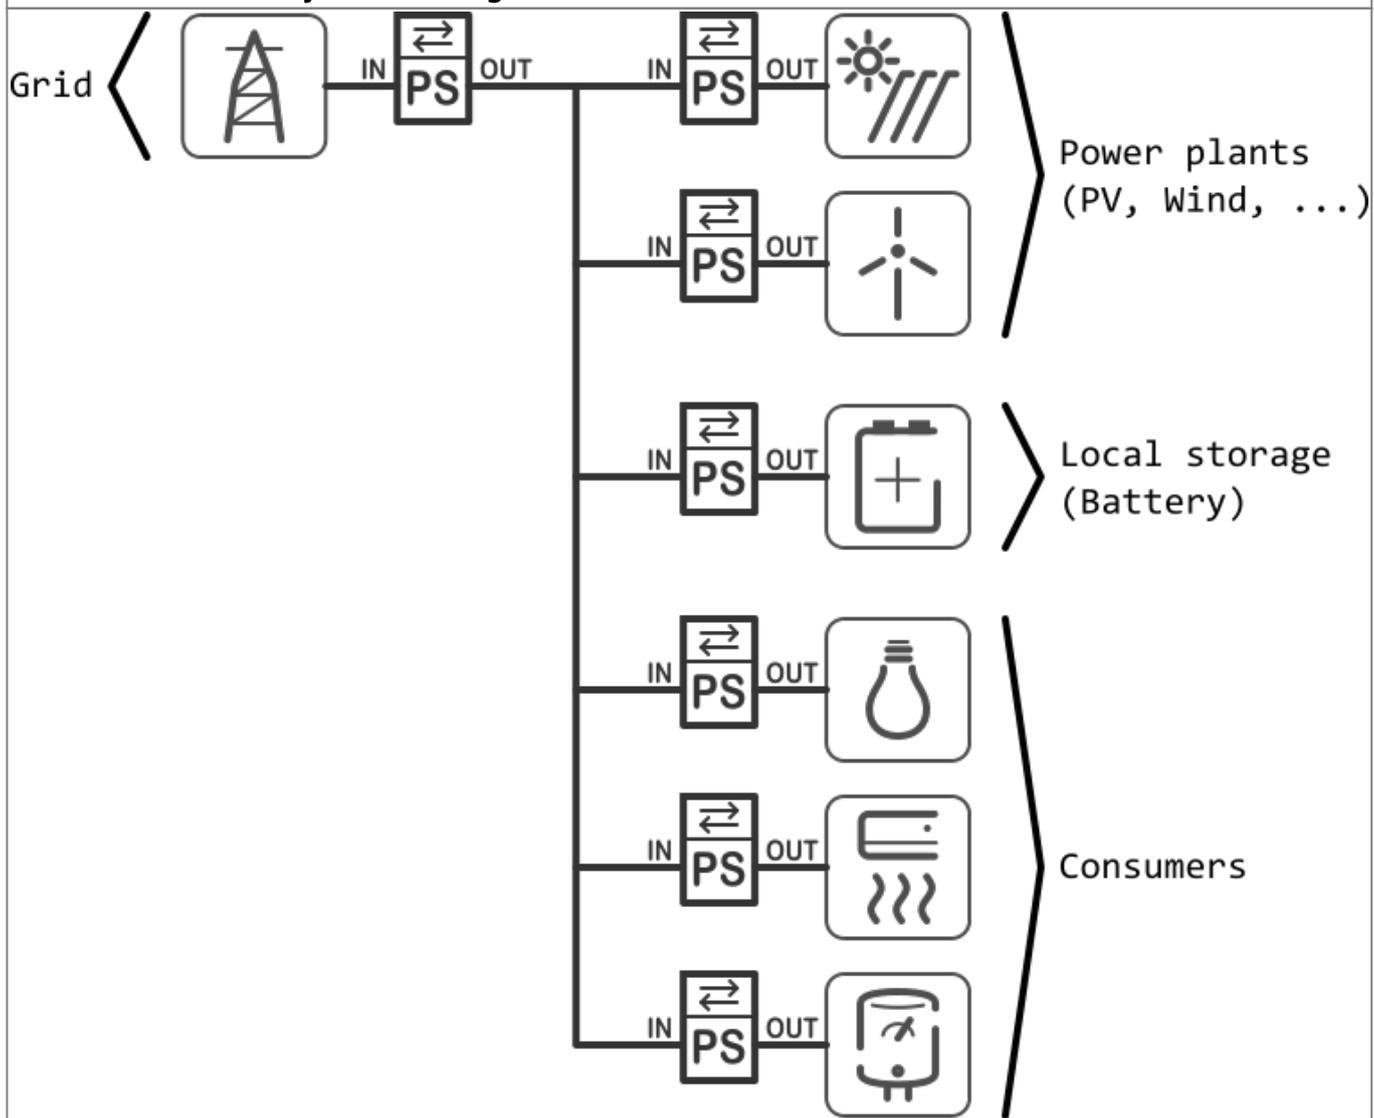

From: <http://wiki.hiq-universe.com/> -

Permanent link: http://wiki.hiq-universe.com/doku.php?id=en:hems_v1_2_0:methods_resources:wiring&rev=1635938746

Last update: 2021/11/03 11:25

