

# Wireless bridge

## Wireless bridge



Model number:	<b>BR-WN-W</b>
Mounting:	field, on wall
Dimensions:	92 × 110(300) × 35 mm

**Used for connecting power meter to wireless network:**

3-phase power meter	<a href="#">PM3-I-D</a>
1-phase power meter	<a href="#">PM1-E-D</a>

**Require:**

Wireless gateway	<a href="#">GW-WN-W</a>
------------------	-------------------------

## Technical specification


POWER SUPPLY	12 ÷ 24Vdc; 100mA
	12 ÷ 24Vac; 50/60Hz; 2,4VA
WIRELESS CHARACTERISTICS	2405 MHz ÷ 2480 MHz
	DSSS Modulation
	Nominal transmission Power +10/+20 dBm
	IEEE 802.15.4 compliant
	Stack EmberZNet5.3.1
	Stack version 0
	Proprietary profile ID
	Proprietary encryption key
CONNECTIONS	Pull-out terminals (3,81 mm pitch)
PROTECTION CLASS	IP55

## Terminals

BR-WN-W Power supply	
+	+
-	-

BR-WN-W	PM1-E-IQ	PM3-I-IQ
GND	8	/
Rx/T+	10	15
Tx/T-	9	16

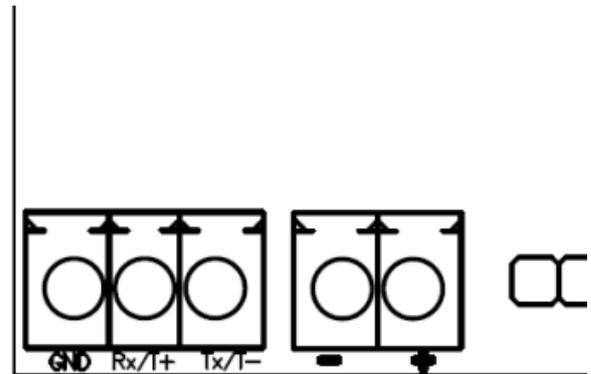

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=en:hiq\\_hw:br-wn&rev=1566387139](http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:br-wn&rev=1566387139)

Last update: **2019/08/21 11:32**

