2025/08/24 10:34 1/3 Three phase power sensor

# Three phase power sensor

#### 3-phase power-sensor



Model number:		PM3-E-D	
Connect to:		MC-230	
		RS485 power sensor bus A - B	
Mounting:		DIN rail, 1M, 18 mm	
Dimensions:		66 × 72 × 100 mm	
Used for measuring power and energy of			
1	single/three-phase energy sources		
1	single/three-phase energy consumers		

## **Applications**

• Digital multi-function power sensor for single/three phase networks

### **Features**

- DIN rail mounting
- Three Phase 100A Direct Fed
- Accuracy Class 0.5 (Active Energy)
- Bi-directional Measurement for kW and kWh
- Configurable Pulsed output (Import/ Export/Nett kWh)
- Line Frequency
- Power, maximum power demand and power factor
- Active energy imported and exported
- Reactive energy imported and exported
- Supported Modbus (SDM630Modbus)

### **General description**

SDM630 series measures and displays the characteristics of 1p2w, 3p3w and 3p4w supplies, including voltage, frequency, current, power, active and reactive energy, imported or exported, harmonic etc. Bi-directional measurement makes it an ideal choice for Solar PV measurement. The units support Max. 100A direct connection, saving the cost and avoiding the trouble to connect external CTs. Two pulse outputs and 1 communication port (Mbus/Modbus) are provided for remote monitoring. The unit has been approved to meet the requirements of EU Directive 2014/32/EU.


### **Technical specifications**

Technical Data				
Operating Humidity	≤ 90%			
Storage Humidity	≤ 95%			
Operating Temperature	-25°C - +50°C			
Storage Temperature	-40°C - +70°C			
Mounting	DIN rail (DIN 43880)			
Sealing	IP51 Indoor			
Frequency	50Hz or 60Hz			
Power Consumption	≤ 10W			
Accuracy				
Voltage, Current	0.2% of range maximum			
Frequency	0.1% of Mid-Frequency			
Power Factor	1% of Unity (0.01)			
Current transformer				
Frequency	50-60 Hz			
Max current	100 A			
Modbus				
Transmission Mode	RS485 Half-Duplex			
Protocol	Modbus RTU			
Baud Rate	2400bps - 38400bps			
Address Range	1-247			
Parity	EVEN/ODD/NONE			
Data Bit	8			
Stop Bit	1 or 2			

### **Installation & Dimensions**

http://wiki.hiq-universe.com/ Printed on 2025/08/24 10:34

2025/08/24 10:34 3/3 Three phase power sensor

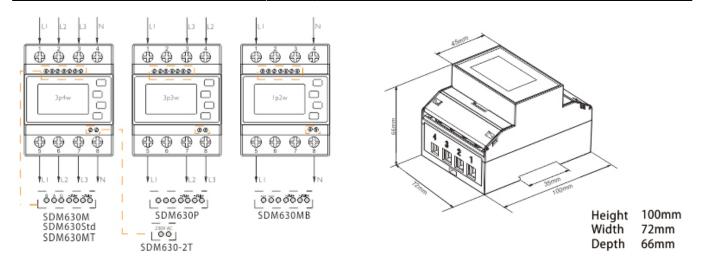

From:

http://wiki.hiq-universe.com/ -

Permanent link:

http://wiki.hiq-universe.com/doku.php?id=en:hiq\_hw:pm3-e-d&rev=1669993845

Last update: 2022/12/02 15:10

