


# Micro card reader

## Wiegand RFID receiver

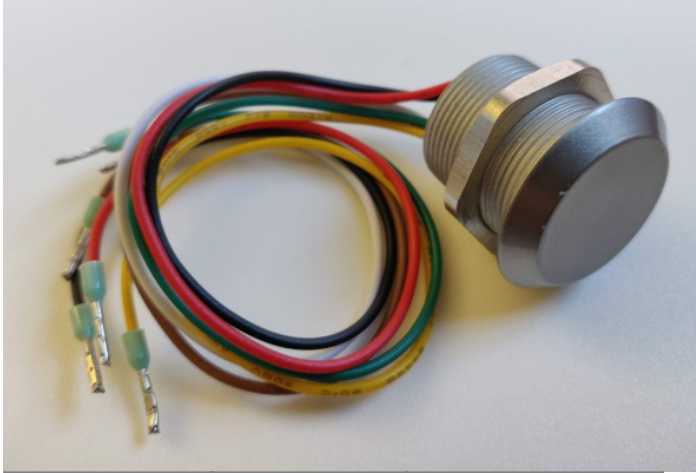

Model number:	<b>CR-MR</b>	EM, 125 kHz
	<b>CR-MM</b>	Mifare
Mounting:	Field, fi 20 mm	
Dimensions:	fi 26 x 25 mm	
Connection:	Wiegand to <a href="#">Card reader interface</a>	

## Technical specifications

Power supply:	12 VDC
Protection:	IP66
Color:	Silver
Reading Distance:	3 cm
Card interface:	EM 125 kHz, Mifare
Output Interface:	Wiegand 26 / 34

## Wiring

CR-MR	CR-W2-IQ		MC-230-3W		Notes
	1st	2nd	1st	2nd	
RD	+12V		+12V		Power supply
BK	GND		GND		
GN	D0-0+1		D0		Wiegand data
WH	D1-0	D1-1	D1-0	D1-1	
YE	GN-0	GN-1	GN-0	GN-1	LED indicator
BN	- / GND*		- / GND*		Wiegand 26 / 34

\* Not connected ⇒ Wiegand 26, GND ⇒ Wiegand 34

From:

<http://wiki.hiq-universe.com/> -

Permanent link:

[http://wiki.hiq-universe.com/doku.php?id=en:hiq\\_hw:cr&rev=1586249224](http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:cr&rev=1586249224)

Last update: **2020/04/07 08:47**

