


Card reader

Wiegand RFID receiver

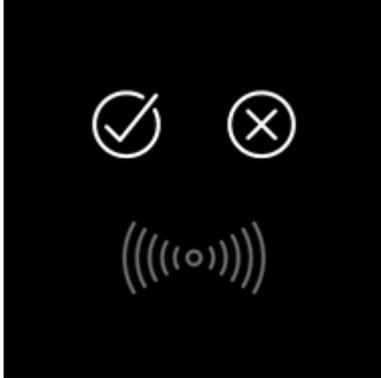

Model number:	CR-HR-B	EM, 125 kHz, black
	CR-HR-W	EM, 125 kHz, white
	CR-HM-B	Mifare, black
	CR-HM-W	Mifare, white
Mounting:	Field, UK rectangular flush box	
Connection:	Wiegand to Card reader interface	

Technical specifications

Power supply:	12 VDC
Protection:	IP66
Reading Distance:	3 cm
Card interface:	EM 125 kHz, Mifare
Output Interface:	Wiegand 26

Wiring

CR-Hx-x	CR-W2-IQ		MC-230-3W	
	1st	2nd	1st	2nd
+12V	+12V		+12V	
GND	GND		GND	
D0-0	D0-0+1		D0	
D1-0	D1-0	D1-1	D1-0	D1-1
GN-0	GN-0	GN-1	GN-0	GN-1
RD-0	RD-0	RD-1	RD-0	RD-1
NC	/		/	

From:

<http://wiki.hiq-universe.com/> -

Permanent link:

http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:cr-hx&rev=1586247380

Last update: **2020/04/07 08:16**

