

# Electric strike

## Electromechanical strike lock



<WRAP column 500px>

|               |              |                 |
|---------------|--------------|-----------------|
| Model number: | <b>EL-ST</b> | Electric strike |
| Mounting:     | Field,       | on door frame   |


## General description

The most compact electric strike without sacrificing any of the quality or safety offered by our other products. EL-ST is the perfect match for narrow aluminium, PVC or timber profiles.

## Technical specifications

|   |                                      |
|---|--------------------------------------|
| Power supply:                           | 9-24V AC/DC, 12V DC                  |
| Continuous duty:                        | <1 min/ED 100%                       |
| Rated resistance:                       | 43 Ohm                               |
| Current consumption AC:                 | 0.15A...9V, 0.2A...12V, 0.39A...24V  |
| Current consumption DC(stabilized):     | 0.21A...9V, 0.28A...12V, 0.56A...24V |
| Maximum side-load on AC:                | 24V - 200N                           |
| Maximum side-load on DC (stabilized):   | 12V - 50N                            |
| Break-in resistance:                    | 4.800N                               |
| Dynamic strength:                       | 4.400N                               |
| Endurance rating (cycles no side-load): | 200.000                              |
| Complies with the directive:            | 2014/30/UE; 2011/65/UE               |

# Dimensions

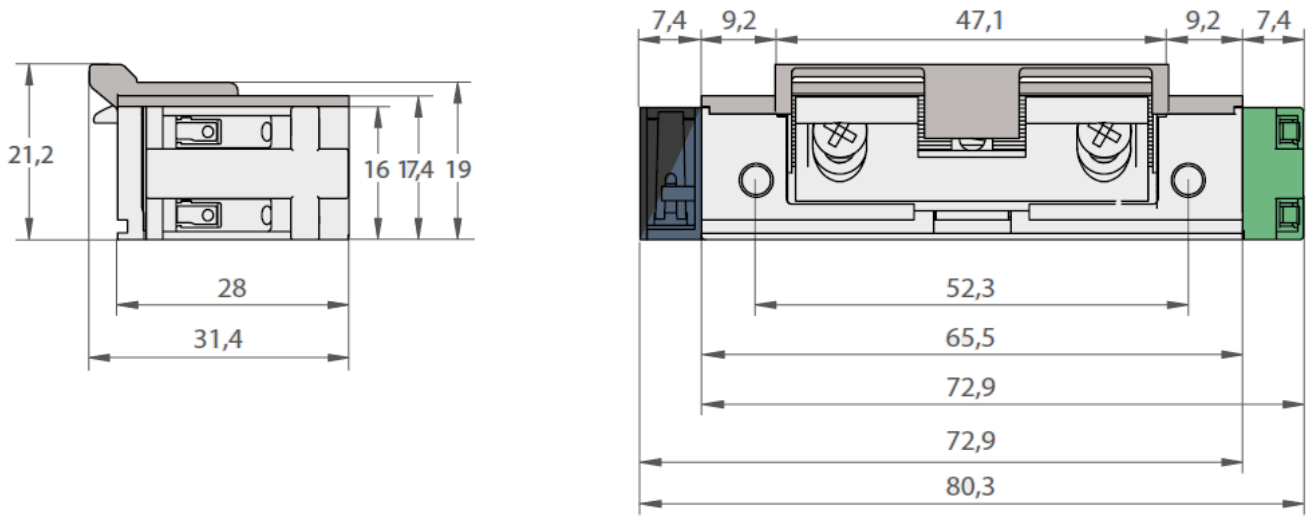

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=en:hiq\\_hw:el\\_strike&rev=1623320276](http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:el_strike&rev=1623320276)

Last update: **2021/06/10 10:17**

