

Light controller

8 relay outputs with parallel option




| | |
|---------------|----------------------|
| Model number: | LC-8-IQ |
| Mounting: | DIN rail, 6M, 106 mm |
| Dimensions: | 106×108×58 mm |

Applications


- general purpose discrete (ON/OFF) lights
- automatic corridor and stairs lights
- door-bell
- managed sockets
- bathroom and other single speed fans
- managed appliances (boiler, oven, electric cooker, ...)

Features

Output mode

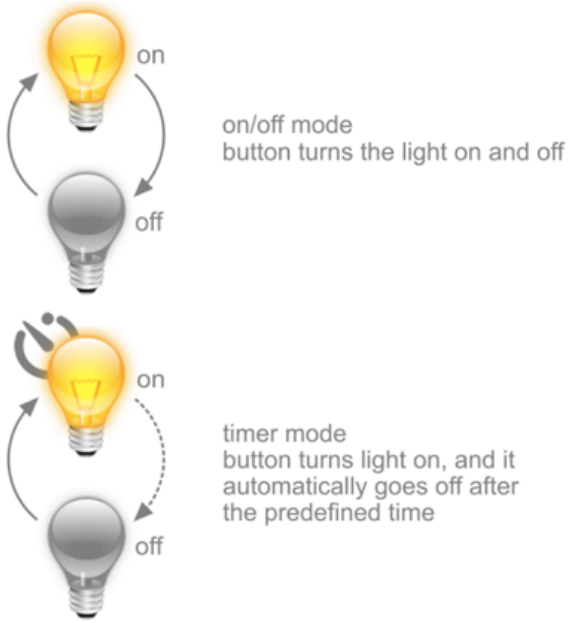

Input mode

-  toggle (press on, press off)
-  timer extend edge (press to reload)
-  timer extend level (counting when released)
-  direct (press on, release off)
-  inverse (closed off, open on)

Input mode defines how input affect the output. Basic functions are handled internally by light controller, night mode and ready light are handled with master controller.

From:
<https://wiki.hiq-universe.com/> -

Permanent link:
https://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:lc-8-iq&rev=1641375681

Last update: **2022/01/05 09:41**

