

# Touch buttons

## Touch buttons panels - part of complete GRMS

</WRAP>

<WRAP column 300px>




Mounting:	on-wall, UK style
Dimensions 1 to 6 buttons:	86×86×(10)42mm
Dimensions 8 buttons:	105×86×(10)42mm
Dimensions 10 to 12 buttons:	120×86×(10)42mm
Model selection:	<b>BXX-HI-OY</b>
XX:	button number 1 to 12
Y:	color selection: 1 black, 2 white, 9 custom
Example: B04-HI-02 is 4 touch buttons white	



## Technical specification

Power:	24 VDC
Network:	RS485 Modbus protocol
Material:	Tempered glass
Touch:	High sensitivity capacitive touchscreen
Service lifespan:	1,000,000 touch times
Operating temperature:	0..45°C
Storage temperature:	-10 to 60°C
Relative humidity:	10-95% RH n/c

## Terminals

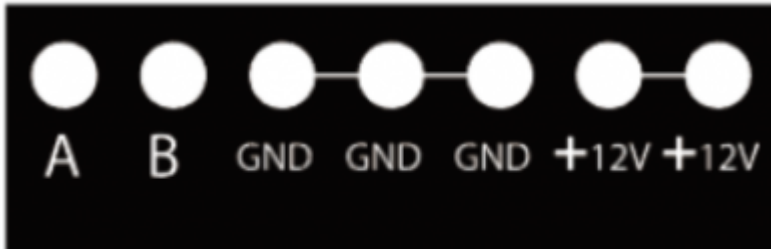

From:

<http://wiki.hiq-universe.com/> -

Permanent link:

[http://wiki.hiq-universe.com/doku.php?id=en:ms\\_main:bxh-hi-0y&rev=1589128570](http://wiki.hiq-universe.com/doku.php?id=en:ms_main:bxh-hi-0y&rev=1589128570)

Last update: **2020/05/10 16:36**

