

Motion sensor

Enocean wireless motion sensor



| | | |
|---------------|-------------------------------|--------------------------|
| Model number: | <input type="text" value=""/> | EN-MS-WT-IQ |
| Mounting: | In-field; on wall | |
| Dimensions: | 65 x 65 x 39 mm | |
| Connection: | Wireless Enocean | |
| | MC-230-01 | |
| | MC-230-03 | |
| | MC-24-01 | |
| | MC-24-03 | |
| | | MC-24-05 |

Applications

- Motion detector
- Ready light
- Intrusion detector
- Lighting control
- Hotel GRMS


Features

- Small visible surface
- Easy mount
- Wireless

Technical specifications

| | |
|--------------------------|----------------------------------------------|
| Power supply: | Battery CR123A 3V - 5 years battery lifetime |
| Wireless range: | Up to 30 m indoor |
| Lux sensing: | 0 to 1000 Lux |
| Operational temperature: | 0°C to 40° |
| EEP (EnOcean Profile): | A5-07-03 |
| Dimensions : | 65 x 65 x 30 mm |

Detection pattern and range

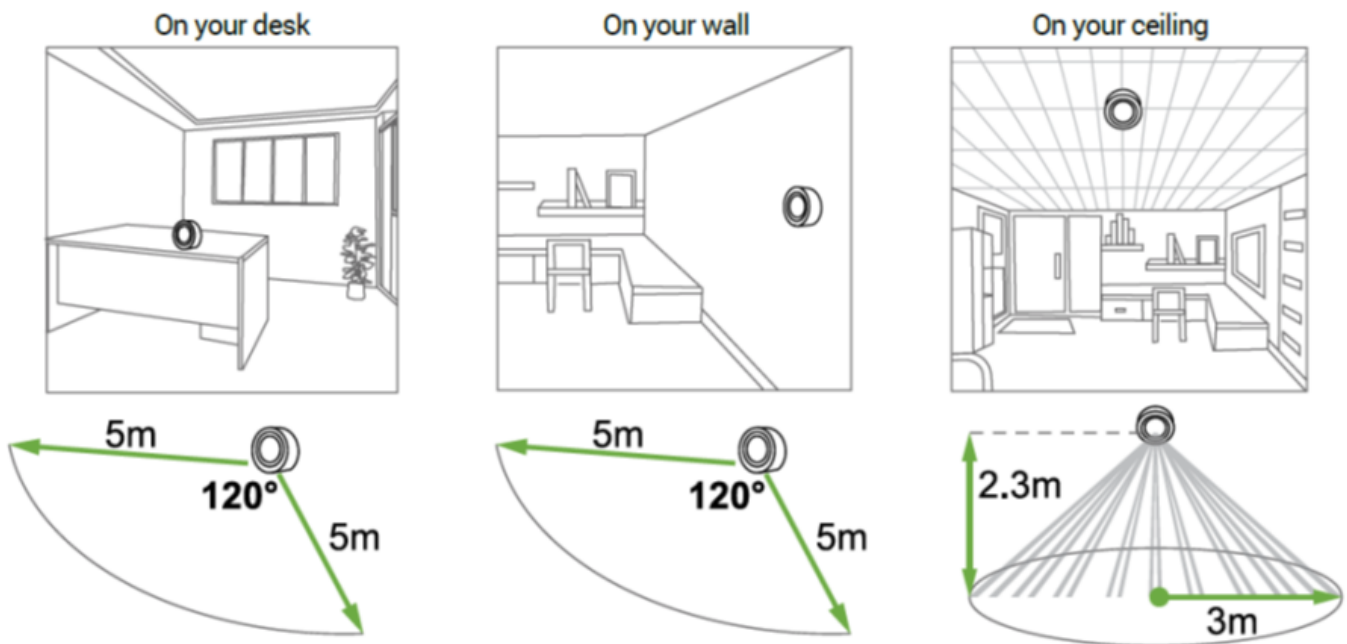

Certifications and standards

Europe

- EN 60950-1:2006+A11:2009
- +A1:2010+A12:2011+A2:2013
- EN 301 489-1 V2.2.0
- EN 301 489-3 V2.1.1
- EN 300 220-2 V3.1.1
- EN 62479:2010

From:

<https://wiki.hiq-universe.com/> -

Permanent link:

https://wiki.hiq-universe.com/doku.php?id=en:ms_main:en-ms-wt-iq&rev=1589113774

Last update: **2020/05/10 12:29**

