

# Power supply

## 24 V DC / 2.5 A power supply




Model number:	<b>PS-60-24</b>
Mounting:	DIN rail
Dimensions:	93 x 78 x 56 mm

## Highlights & Features


- Universal AC input voltage and full power up to 50°C
- Efficiency > 84.0% @ 230Vac

## Technical specification

Input voltage range	90 - 264 VAC
Output voltage	24 VDC
Output current	2.50 A
Rated Current	60W
Voltage adj. range	+/-10%
Voltage tolerance	+/-1%
Input current	0.65A @ 230Vac
Operating temperature	-20°C to +50°C; 20% to 90% RH
Storage temperature	-40°C to +85°C; 10% to 95% RH Non condensing

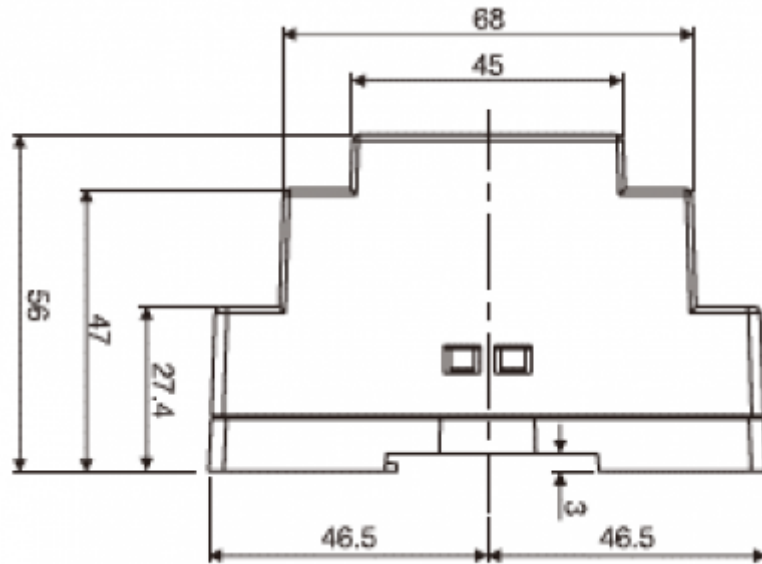

==== Dimensions =====

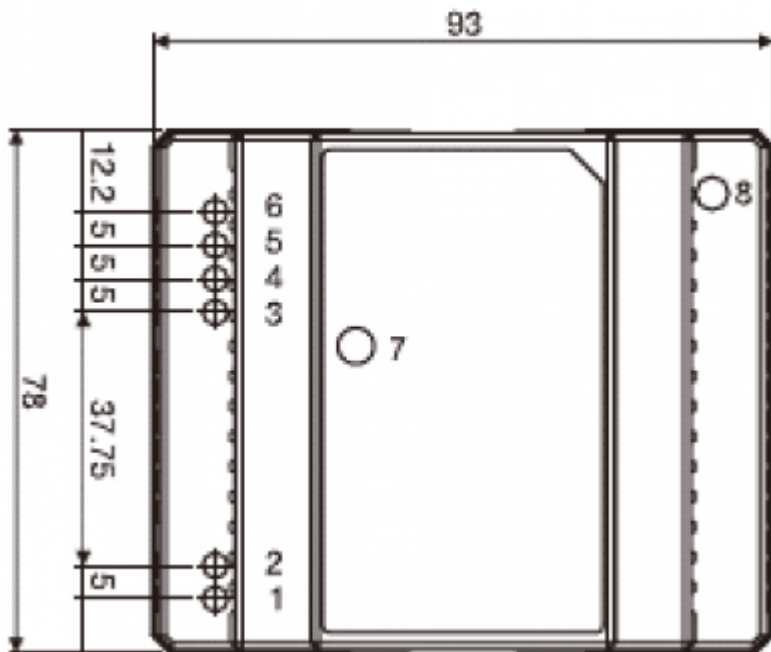

==== Pin assignment =====

Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5, 6	-V
2	AC/L	7	LED
3, 4	+V	8	+V Adj.

==== Safety Standards ===== \*

UL60950-1 \* TUV EN60950-1 \* EN50178

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=en:ms\\_main:ps-60-24&rev=1610922131](http://wiki.hiq-universe.com/doku.php?id=en:ms_main:ps-60-24&rev=1610922131)

Last update: **2021/01/17 22:22**

