

Power supply

24 V DC / 1.5 A power supply



| | |
|---------------|-------------------|
| Model number: | PSM-30-24 |
| Mounting: | DIN rail |
| Dimensions: | 90 x 35 x 58.4 mm |


Highlights & Features

- Ultra slim design with 35mm(2SU) width
- Universal input 85-264VAC
- No load power consumption <0.3W
- DC output voltage adjustable
- Efficiency > 89.0% @ 230Vac

Technical specification

| | |
|-----------------------|--|
| Input voltage range | 90 - 264 VAC |
| Output voltage | 24 VDC |
| Output current | 2.50 A |
| Rated Current | 60W |
| Voltage adj. range | +/-10% |
| Voltage tolerance | +/-1% |
| Input current | 0.65A @ 230Vac |
| Operating temperature | -20°C to +50°C; 20% to 90% RH |
| Storage temperature | -40°C to +85°C; 10% to 95% RH Non condensing |

Dimensions

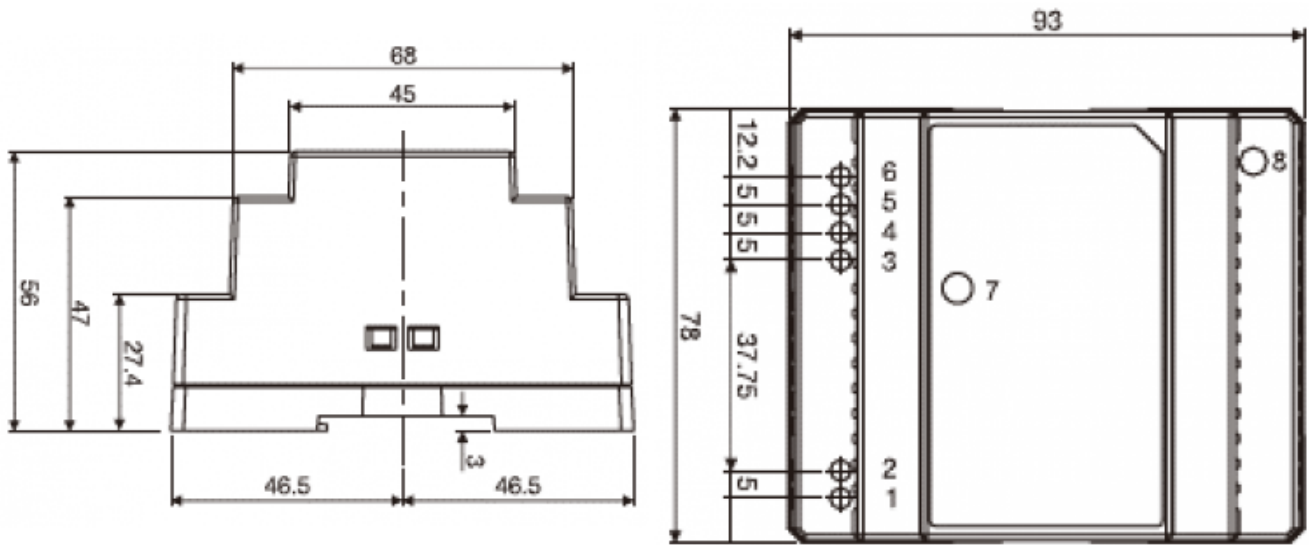

Pin assignment

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|------------|
| 1 | AC/N | 5, 6 | -V |
| 2 | AC/L | 7 | LED |
| 3, 4 | +V | 8 | +V Adj. |

Safety Standards

- UL60950-1
- TUV EN60950-1
- EN50178

From:
<http://wiki.hiq-universe.com/> -

Permanent link:
http://wiki.hiq-universe.com/doku.php?id=power_supply&rev=1669806469

Last update: **2022/11/30 11:07**

