

# Power supply

## 24 V DC / 1.5 A power supply



Model number:	<b>PSM-30-24</b>
Mounting:	DIN rail
Dimensions:	90 x 35 x 58.4 mm


## Highlights & Features

- Ultra slim design with 35mm(2SU) width
- Universal input 85-264VAC
- No load power consumption <0.3W
- DC output voltage adjustable
- Efficiency > 89.0% @ 230Vac

## Technical specification

Input voltage range	90 - 264 VAC
Output voltage	24 VDC
Output current	2.50 A
Rated Current	60W
Voltage adj. range	+10%
Voltage tolerance	+1%
Input current	0.65A @ 230Vac
Operating temperature	-20°C to +50°C; 20% to 90% RH
Storage temperature	-40°C to +85°C; 10% to 95% RH Non condensing

## Dimensions

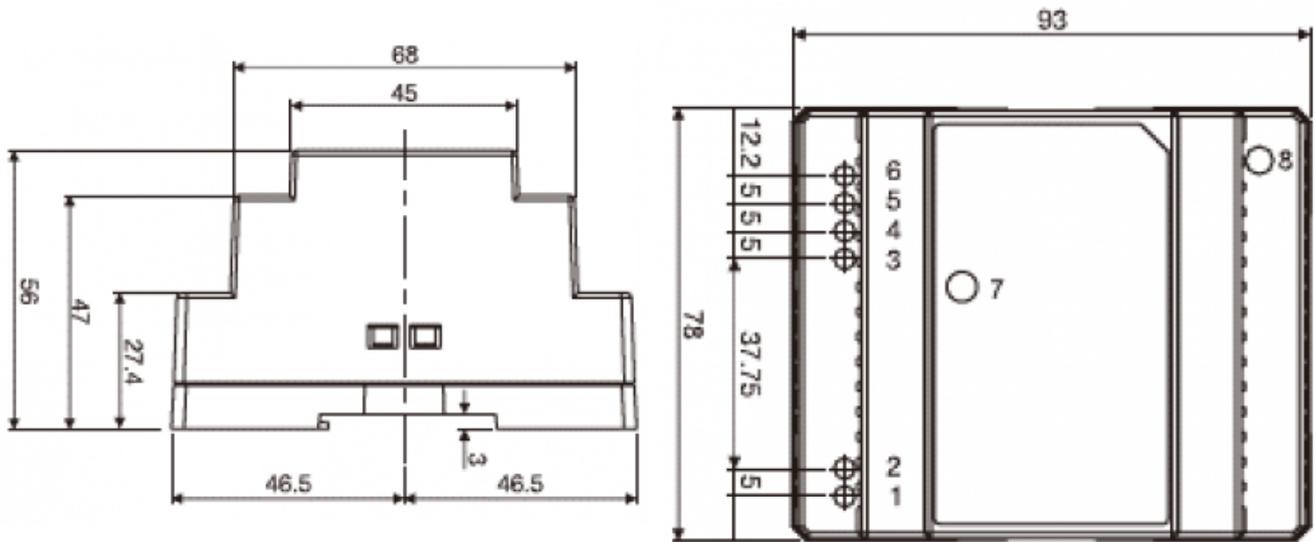

## Pin assignment

Pin No.	Assignment	Pin No.	Assignment
1	AC/N	5, 6	-V
2	AC/L	7	LED
3, 4	+V	8	+V Adj.

## Safety Standards

- UL60950-1
- TUV EN60950-1
- EN50178

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=power\\_supply&rev=1669806578](http://wiki.hiq-universe.com/doku.php?id=power_supply&rev=1669806578)

Last update: **2022/11/30 11:09**

