
Soft Button

** Enocean wireless soft button **



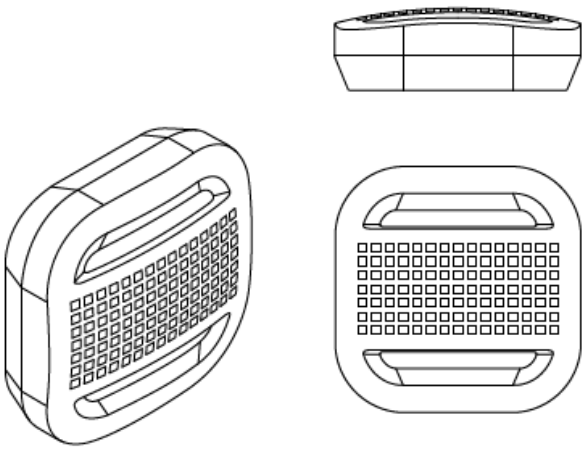

Model number:		**PB-WE-B1**
		**PB-WE-B2**
		**PB-WE-B3**
		**PB-WE-B4**
		**PB-WE-B5**
		**PB-WE-B6**
Mounting:	In-field; remote	
Dimensions:	36 x 36 x 12 mm	
Connection:	Wireless Enocean	
	MC-230-01	
	MC-230-03	
	MC-24-01	
	MC-24-03	
	MC-24-05	

Technical specifications

Power supply:	Battery CR2032
Battery life:	7 years
Range:	Up to 30m indoor
Operational temperature:	-10°C to 50°
EEP (EnOcean Profile):	D2-03-0A
Dimensions :	36 x 36 x 12 mm
Protection index:	IP67
Frequency range:	868.0 to 868.6 MHz
Maximal power radio :	+3dBm

Certifications and standards

- EN 300 220-2 V3.1.1
- EN 301 489-1 V2.1.1:2017
- EN 301 489-3 V2.1.1:2017
- EN 62479: 2010
- RED Directive 2014/53/EU
- EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013

From:
https://wiki.hiq-universe.com/ -

Permanent link:
https://wiki.hiq-universe.com/doku.php?id=soft_button&rev=1592473250

Last update: **2020/06/18 09:40**