
# Wireless touch wall switch

### Wall glass finish touch switch with relay output

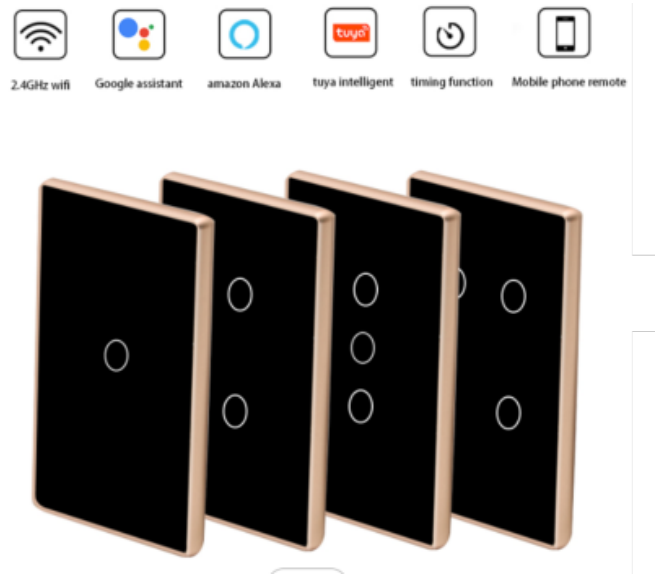


| | |
|---|---|
| Model: | **TSW-L1D-y** |
| Colour: | **y: W-white, B-black, G-gold, C-custom** |
| Connects: | app, lighting circuit |
| Mounting: | In wall |

## Applications

- Touch switching
- Wireless switch via phone app


## Features

- Aestetical look
- Easy mount
- Pleasant feel
- Scene control - One key to control multiple devices
- APP support - smart life or tuya smart app
- Share Control on several smart phones
- Voice control via Alexa or Google home

# Technical specifications

| | |
|---|---|
| Input | AC 100-250 V, 50/60 Hz |
| Output | 500 W/gang (resistive load); 200 W/gang (LED) |
| Wireless standard | IEEE 802.11b/g/n; 2.4 GHz |
| Control mode | APP/Touch/Voice control (Amazon Alexa, Google home...) |
| Material | Panel: toughened glass; Shell: fire retardant PC |
| Output contact rating | 100,000 cycles |
| Operating system | Compatible with ios and Android |
| Dimension | 86 x 86 x 35 mm |

# Terminals

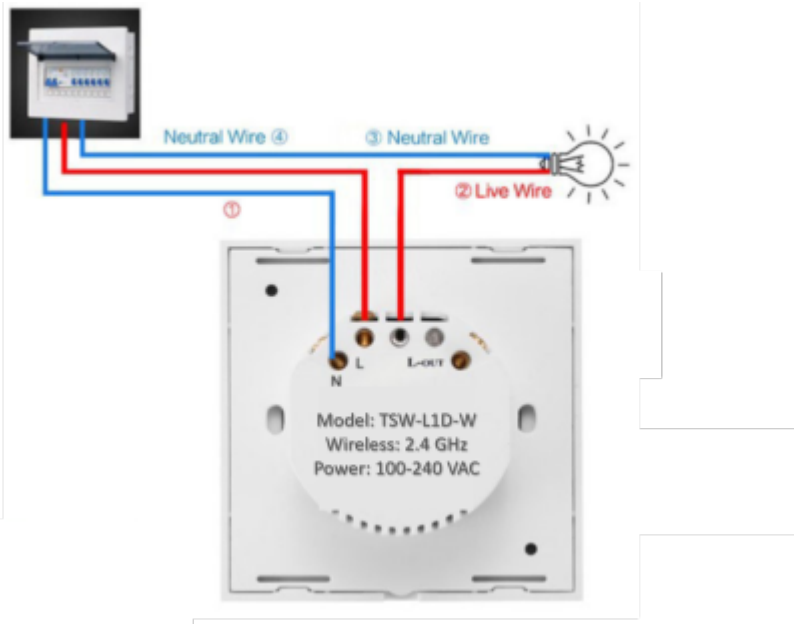


From:
https://wiki.hiq-universe.com/ -

Permanent link:
**https://wiki.hiq-universe.com/doku.php?id=en:ms_main:tsw-l1d-y&rev=1618176054**

Last update: **2021/04/11 21:20**