


Wireless touch wall switch

Wall glass finish touch switch with relay output

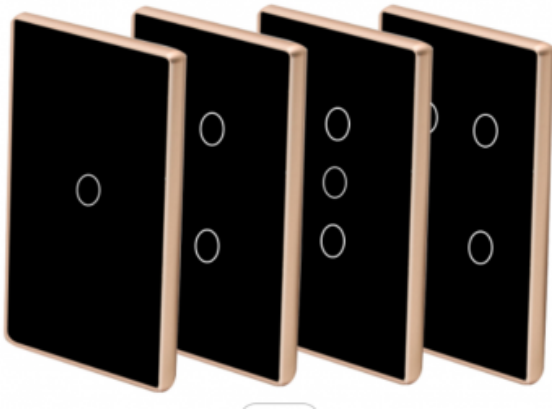

| | |
|--------------|--|
| Model: | TSW-Lx-y |
| Gang number: | x: 1 or 2 or 3 or 4 |
| Colour: | y: W-white, B-black, G-gold, C-custom |
| Connects: | app, lighting circuit |
| Mounting: | In wall |

Applications

- Touch switching
- Wireless switch via phone app


Features

- Aestetical look
- Easy mount
- Pleasant feel
- Scene control - One key to control multiple devices
- APP support - smart life or tuya smart app
- Share Control on several smart phones
- Voice control via Alexa or Google home

Technical specifications

| | |
|-----------------------|--|
| Input | AC 100-250 V, 50/60 Hz |
| Output | 500 W/gang (resistive load); 200 W/gang (LED) |
| Wireless standard | IEEE 802.11b/g/n; 2.4 GHz |
| Control mode | APP/Touch/Voice control (Amazon Alexa, Google home...) |
| Material | Panel: toughened glass; Shell: fire retardant PC |
| Output contact rating | 100,000 cycles |
| Operating system | Compatible with ios and Android |
| Dimension | 86 x 86 x 35 mm |

Terminals

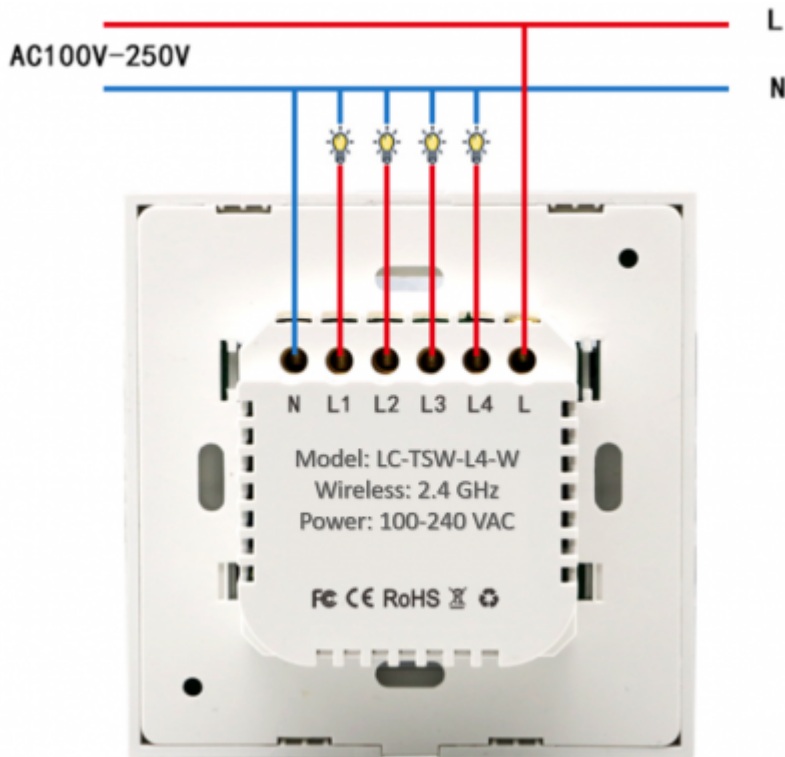

From:
<http://wiki.hiq-universe.com/> -

Permanent link:
http://wiki.hiq-universe.com/doku.php?id=en:ms_main:tsw-lx-y&rev=1618173378

Last update: **2021/04/11 20:36**

