

# Master Controller

## Advanced Controller



Model number:	<b>MC-24-05</b>	24 VDC, 11 IO, 2 × RS232, RS485, IEX2 terminals
	<b>MC-24-06</b>	24 VDC, 11 IO, 2 × RS232, RS485, IEX2 terminals, EnOcean
Mounting:	DIN rail(35mm), 6M, 106mm	
Dimensions:	106x108x58mm	

## Features

- 12 digital inputs
- 10 relay outputs 8 A
- 4 universal inputs/outputs
- Ethernet, USB, IEX-2, 2×RS232
- EnOcean gateway (optional)
- 24 VDC power supply


## Safety standards

EN 61010-1, EN 61010-2-201, EN 61131-2

## Technical specification

System clock	100MHz
Instruction execution	10ns per instruction
Program memory	896Kb for user program
Data memory	64Kb for user variables
Data retention	7 days
RTC accuracy	typ. $\pm 2$ sec per day at 25°C
Digital input (ix00..ix11)	24V 7mA, opto isolated, bidirectional
Digital input (ix12..ix15)	dry contact, internal pull-up 12V 3mA
Digital output (qx00..qx09)	relay 8A/250VAC or 8A/30VDC resistive
Digital output (qx12..qx15)	NPN transistor 30V 1A
IEX-2 bus load	48 modules (Cybro + 47 IEX-2)
IEX-2 baud rate	20, 50, 100 (default), 250, 500kbps
IEX-2 cable length, 100kbps	100m (non-terminated)
IEX-2 cable length, 100kbps	300m (terminated)
IEX-2 cable length, 50kbps	500m (terminated)
Power supply	24V (18..28V)
Power consumption	50mA (no load), 180mA (10 relays, 4x 10Vout)
Power output (IEX-2)	24V 2A (limited by resettable fuse)
Operating conditions	0..50°C, 0..85% rh non-condensing
Degree of protection	IP20
Installation category	III

## Terminals

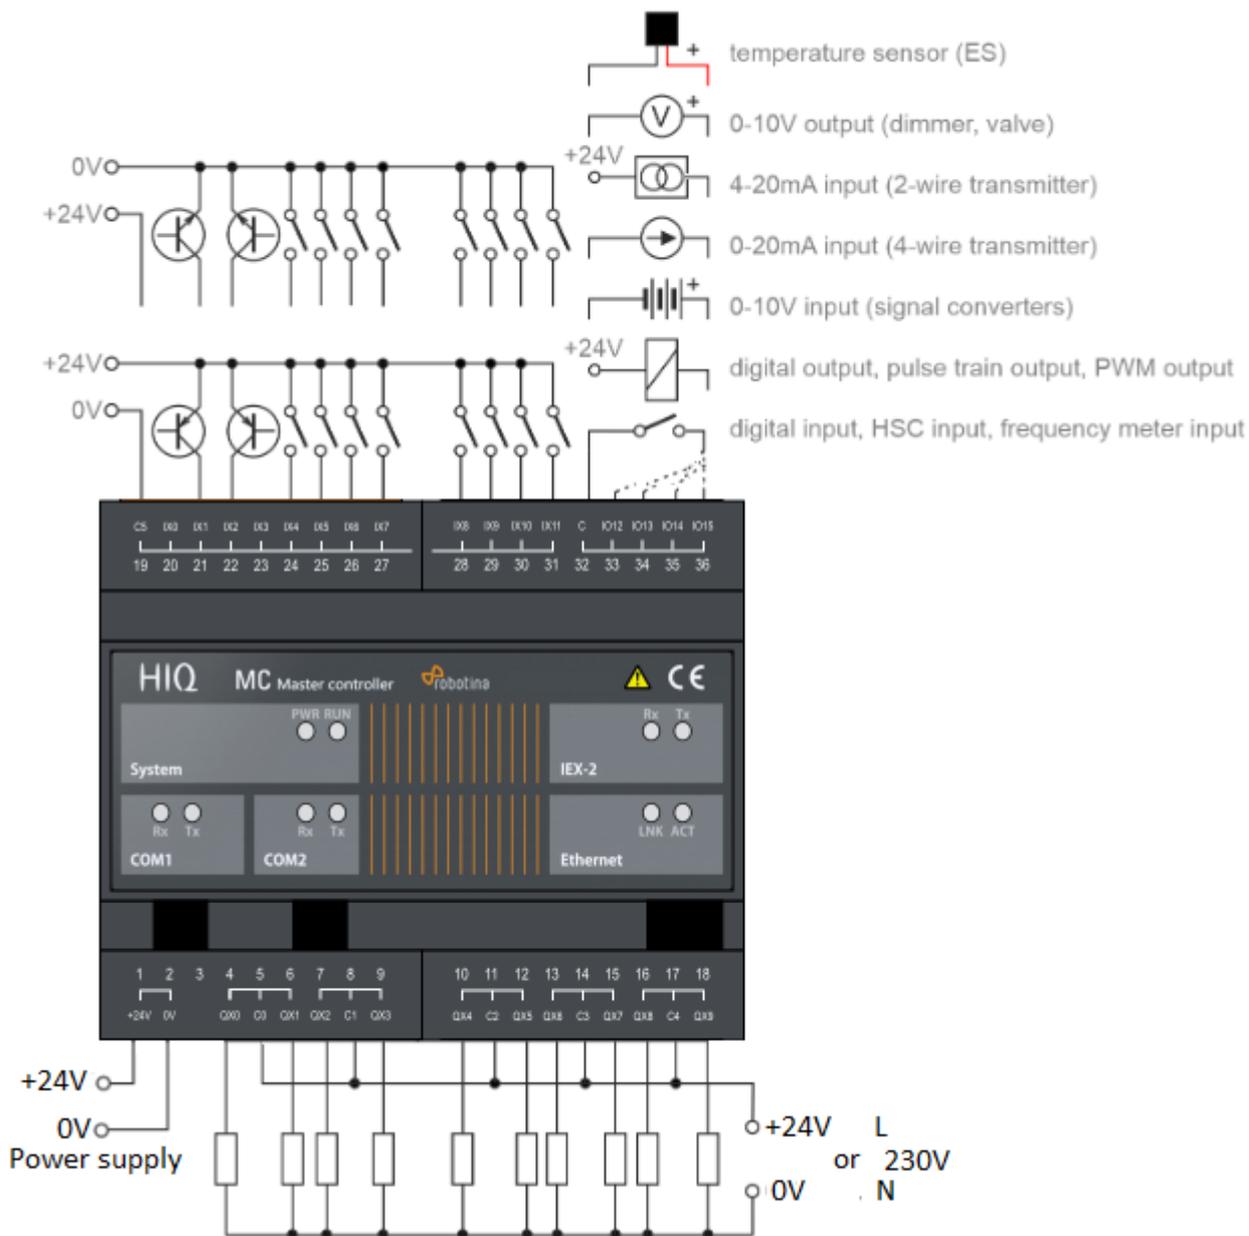

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=en:hiq\\_hw:mc3-24&rev=1594807903](http://wiki.hiq-universe.com/doku.php?id=en:hiq_hw:mc3-24&rev=1594807903)

Last update: **2020/07/15 10:11**

