


Power plant connection

The power plants can be connected to the grid in two ways:

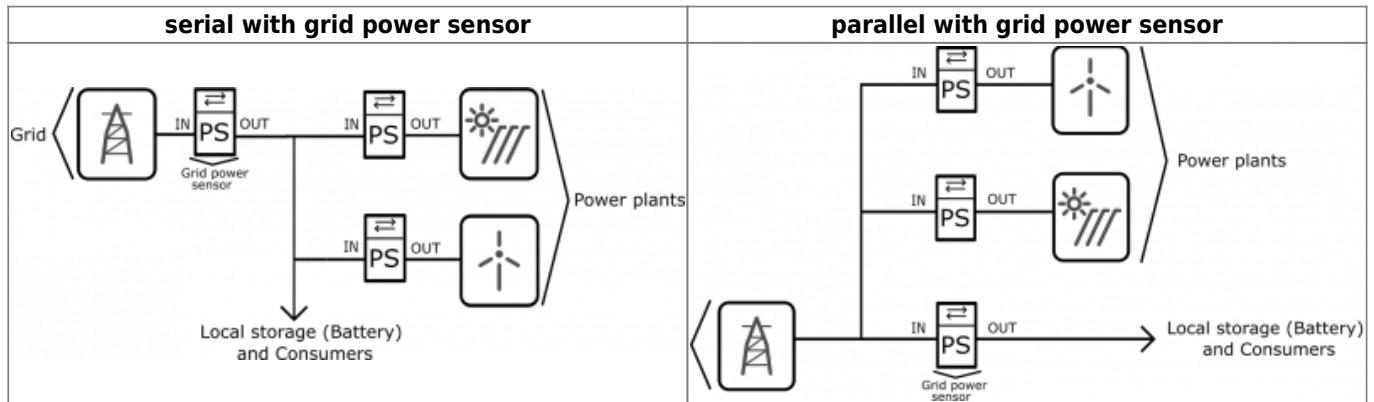

When configuring the power plant, select

- **in:** serial (**i**nternal) with grid power sensor
- **ex:** parallel (**e**xternal) with grid power sensor

The power plants are configured as internal by default.

PV inverter

Obtaining relevant data from photovoltaic is possible by two ways:

1. adding power-sensor to measure produced electricity by PV (no connection to interver) - on how to add power sensor please see [Power Sensor](#)
2. connecting PV inverter by Modbus TCP to EVSE (only for SolarEdge inverters)

EVSE and PV inverter connection



To add inverter on HEMS configurator:

- on settings page inside source table, select SolarEdge inverter. [software](#)
- on io mux page define IP address for inverter. [software](#)

To setup Modbus TCP on Inverter using SetApp:

- Select Site Communication menu
 - RS485-1 → Protocol → SunSpec (Non-SE Logger)
 - RS485-1 → Device ID, and enter the number 1.
 - Select Modbus TCP and set to Enable.
 - To modify the *TCP port, select Port, set the port number to 502.

*TCP port is 1502 by default.

Last update:
2022/12/09 en:robotina_charger:commissioning:pv_inverter http://wiki.hiq-universe.com/doku.php?id=en:robotina_charger:commissioning:pv_inverter&rev=1670594124
13:55

From:
<http://wiki.hiq-universe.com/> -

Permanent link:
http://wiki.hiq-universe.com/doku.php?id=en:robotina_charger:commissioning:pv_inverter&rev=1670594124

Last update: **2022/12/09 13:55**

