

# Power supply

## 24 V DC / 1.5 A power supply



Model number:	<b>PSM-30-24</b>
Mounting:	DIN rail
Dimensions:	90 x 35 x 58.4 mm

## Highlights & Features


- Ultra slim design with 35mm(2SU) width
- Universal input 85-264VAC
- No load power consumption <0.3W
- DC output voltage adjustable
- Efficiency > 89.0% @ 230Vac

## Technical specification

Input voltage range	85 - 264 VAC
Output voltage (adjustable)	21-29 VDC
Output current	1.50 A
Rated Current	30W
Voltage tolerance	+1%
Input current	0.48A @ 230Vac
Working temperature	-30°C to +70°C
Working humidity	20 to 90% RH non-condensing;
Storage temperature	-40°C to +85°C
Storage humidity	10% to 95% RH non-condensing

Vibration	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6
Withstand Voltage	I/P-O/P:3KVAC
Isolation resistance	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH

# Dimensions

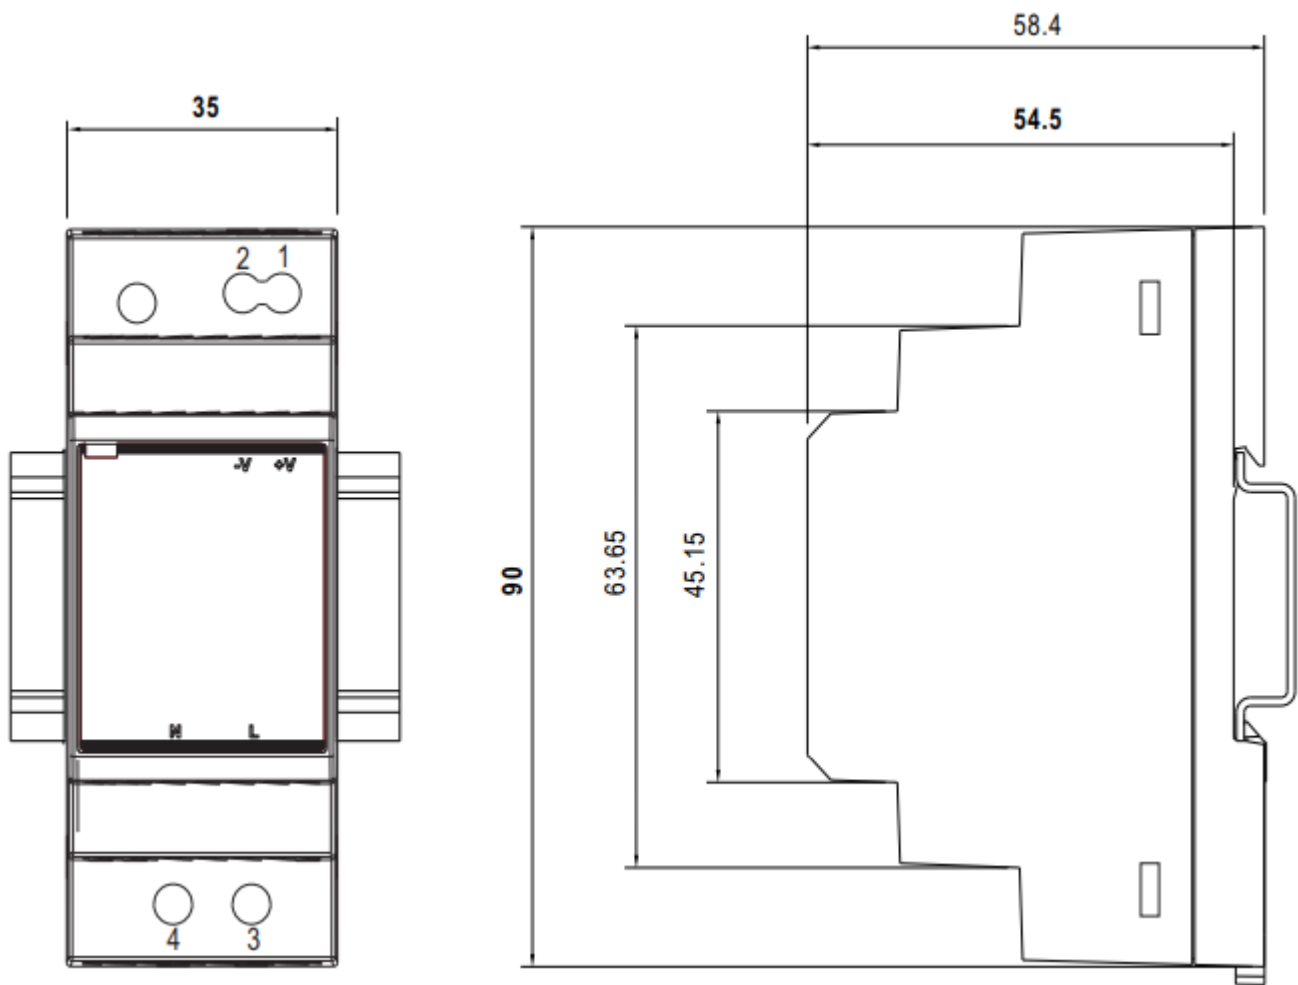

# Safety Standards

- EN55032(CISPR32)
- EN61000-3-2
- EN61000-3-3
- EN55024, EN55035, EN61000-6-2, EN61204-3
- EN61000-4-2
- EN61000-4-3
- EN61000-4-4
- EN61000-4-5
- EN61000-4-6

From:  
<http://wiki.hiq-universe.com/> -

Permanent link:  
[http://wiki.hiq-universe.com/doku.php?id=power\\_supply&rev=1669811804](http://wiki.hiq-universe.com/doku.php?id=power_supply&rev=1669811804)

Last update: **2022/11/30 12:36**



